




Contents




Komfy Switch Cover with 2 Click Pads




Faceplate




Komfy Switch with Camera



Wiring Labels



5 Wire Nuts



4 Screws

Komfy

by D-Link

Quick Installation Guide Komfy Switch with Camera



Komfy

by D-Link

WARNING! Potential Shock Hazard

Please read all the instructions before you begin installation. The Komfy Switch is designed for installation in standard electrical boxes and to be installed in accordance with National Fire Protection Association (NFPA 70). If you are not sure about any part of the instructions, consult a qualified electrician to perform the installation.

Verify Switch Compatibility

1. Not compatible with 3-way (multi-location control) switches.
2. Requires neutral wire (refer to Step 2).

Verify Wi-Fi Signal Strength

Hold your iPhone close to the switch you are replacing. Make sure you have a good Wi-Fi signal there.

Antennas contained in the device: 1x1 BT antenna, 2x2 WiFi antenna.

v1.0

1. Turn Off Circuit Breaker

Turn off the power to the light switch at the main circuit breaker or fuse box.


Important: Flip your light switch a few times to ensure the power is off.



2. Remove Faceplate from Old Switch


Take a picture for future reference.

1 - Gang



- 1 Load Required. You need 1 load for 1-gang.
- 2 Hot Wire (Live) Required.
- 3 Neutral Required, but not always present. **STOP if you do not have it.**
- 4 Ground Optional, and not always present.


2 - Gang

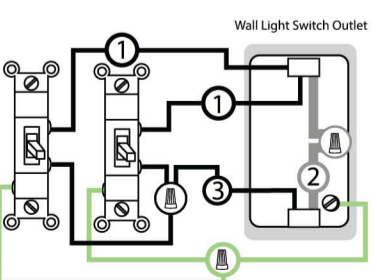

- 1 Load Required. You need 2 loads for 2-gang.
- 2 Neutral Required, but not always present. **STOP if you do not have it.**
- 3 Hot Wire (Live) Required.
- 4 Ground Optional, and not always present.

3. Wire Labeling

Use the included wiring labels and attach the stickers to the corresponding wires. Green for "Ground", white for "Neutral", black for "Hot", red for "Upper Light" and brown for "Lower Light".




4. Remove Old Switch

Disconnect the old switch from the electrical box.

5. Wiring


Connect the wires from the Komfy Switch to the old switch wires.

1 - Gang

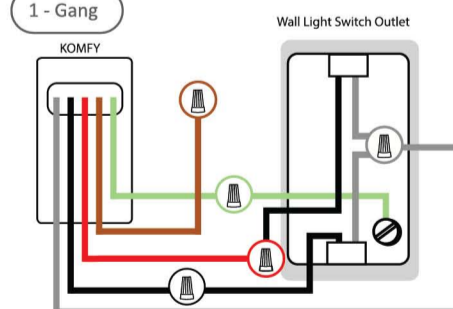

The unused wire should be protected by a wire nut.


2 - Gang

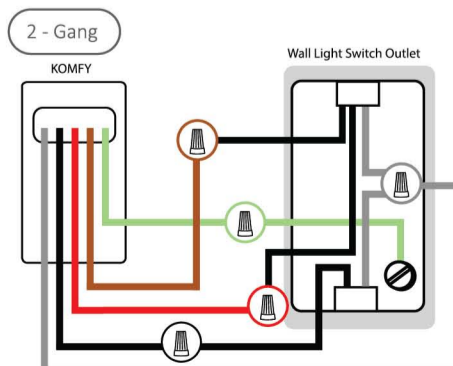


Refer to Step 3 for Color Wiring Labeling

6. Attach Komfy Switch

Screw the Komfy Switch into the electrical box and then slide the power selector to 1 or 2. 1-gang and 2-gang have different screws patterns as shown below:



1 - Gang:
2 middle screws




2 - Gang:
4 side screws

7. Turn On The Circuit Breaker

Turn the power back on at the circuit breaker or fuse box.


8. Press and Hold Setup Button for 5 Seconds

When the Wi-Fi LED lights up, press and hold the setup button for 5 seconds until the Wi-Fi LED starts blinking. When the Wi-Fi LED stops blinking, the Komfy Switch is ready to be configured.

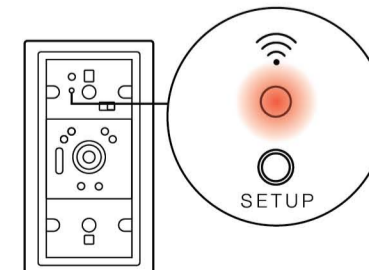


9. Attach Accessories

Attach the included faceplate to the Komfy Switch and then put the Komfy Switch cover with click pads over the faceplate.

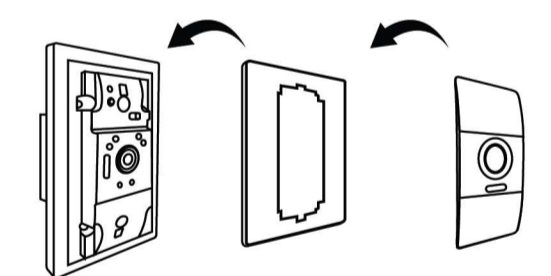


Komfy Switch Faceplate Komfy Switch Cover With Click Pads




If you want to remove the the switch cover, pull out at the corners either at the top or bottom to remove it.

10. Configure Komfy Switch

Download the Komfy App and sign up for a Komfy account. Tap the "Add Device" button to complete the configuration.



New User



Existing User

129mm



D-Link FCC/IC Compliance Statement

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antennas(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC multi-transmitter product procedures.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

FCC Caution:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Note:

The country code selection is for non-US model only and is not available to all US model. Per FCC regulation, all WiFi product marketed in US must fixed to US operation channels only.

RF Frequency Requirements

This device is for indoor use only when using all channels in the 5.150GHz-5.250GHz, 5.725GHz-5.850GHz frequency range. High power radars are allocated as primary users of the 5.150GHz-5.250GHz, 5.725GHz-5.850GHz bands. These radar stations can cause interference with and/or damage this device. This device will not operate on channels which overlap the 5600-5650MHz band. It is restricted in indoor environment only.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

V1.1

Industry Canada Statement

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution:

- (i) the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;

Avertissement:

- (i) les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;

Radiation Exposure Statement

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

High Power Radars:

High power radars are allocated as primary users (meaning they have priority) in the 5250MHz to 5350MHz and 5650MHz to 5850MHz bands. These radars could cause interference and/or damage to Wireless LAN devices used in Canada.

Les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250 - 5350 MHz et 5650 - 5850 MHz. Ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

182mm