

LiftMaster®

Garage Access Systems

MyQ™ LAMP MODULE MODEL 825LM

OVERVIEW

The Lamp Module offers a quick and convenient way to control the lights in your home. The module can be programmed to a remote control, a garage door opener, or a MyQ™ Gateway device. The module is compatible with up to 5 Security+™ 2.0 remote controls **OR** a combination of up to 3 garage door openers or MyQ™ Gateway devices. This product is NOT recommended for household appliances.

SPECIFICATIONS

Bulb Type: Compact fluorescent, incandescent, halogen, or LED

Bulb Wattage: Up to 150 Watts

MODES OF OPERATION

The module can be programmed to a remote control, a garage door opener, or a MyQ™ Gateway device.

REMOTE CONTROL OPERATION:

Allows you to activate the module from a remote control.



GARAGE DOOR OPENER OPERATION:

Allows you to synchronize the module with your garage door opener light bulbs.

Example: The garage door opener light bulbs are set to automatically turn off after 4 ½ minutes, the module will also turn off after 4 ½ minutes.



MyQ™ GATEWAY OPERATION:

Allows you to activate the module from a web browser (requires a MyQ™ Gateway device).




⚠ WARNING

To prevent possible **SERIOUS INJURY** or **DEATH** from electrocution or fire, the light control is **ONLY** for indoor use.


NOTICE: To comply with FCC and/or Industry Canada rules (IC), adjustment or modifications of this receiver and/or transmitter are prohibited, except for changing the code setting or replacing the battery. **THERE ARE NO OTHER USER SERVICEABLE PARTS.**

Tested to Comply with FCC Standards for Home or office use. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

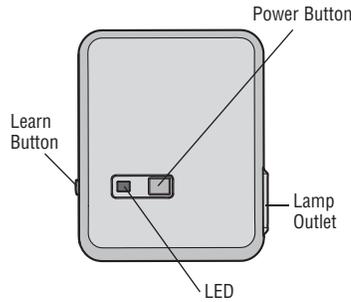


INSTALLATION & PROGRAMMING


- 1** Plug the lamp into the module and plug the module into an electrical outlet (the LED on the module will flash). **NOTE:** Make sure the lamp is switched ON.

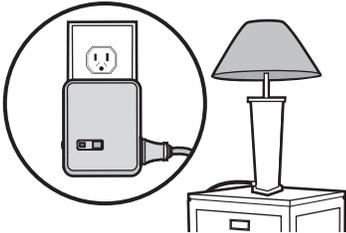

- 2** If the lamp is not ON, press and release the Power button on the module to turn the lamp ON.

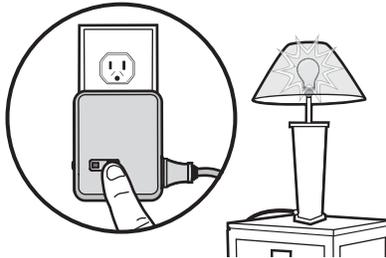


- 3** Press and release the Learn button on the module (the LED on the module will light).

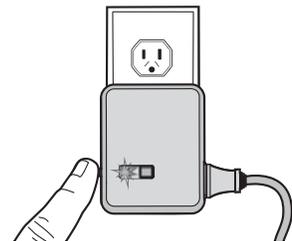


- 4** Press the following (depending on the mode of operation):


Button on Remote Control




Learn Button on Garage Door Opener

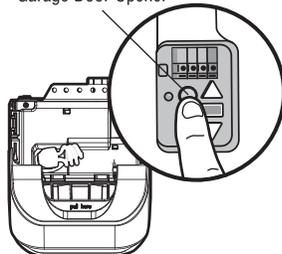

Learn Button on MyQ™ Gateway device

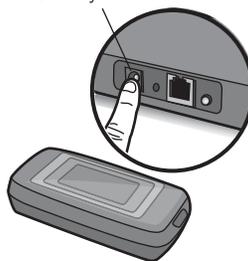

The lamp's light bulb will blink and the LED on the module will turn OFF when the device has been programmed.

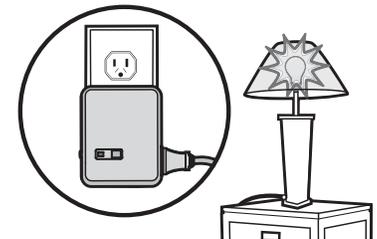

TO ERASE ALL PROGRAMMING

Press and hold the Learn button on the module for 6 seconds. All programming is now erased.

ONE YEAR LIMITED WARRANTY

The Chamberlain Group, Inc. warrants to the first retail purchaser of this product that is free from defect in materials and/or workmanship for a period of 1 year from the date of purchase.


OVERVIEW

The Lamp Module offers a quick and convenient way to control the lights in your home. The module can be programmed to a remote control or a garage door opener. The module is compatible with up to 5 Security+®2.0 remote controls **OR** a combination of up to 3 garage door openers. This product is NOT recommended for household appliances.

SPECIFICATIONS

Bulb Type: Compact fluorescent, incandescent, halogen, or LED

Bulb Wattage: Up to 150 Watts

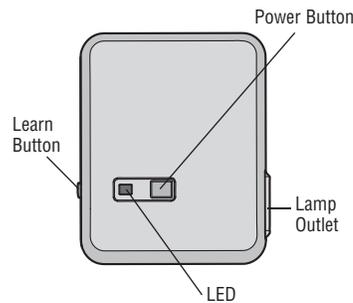

WARNING

To prevent possible **SERIOUS INJURY** or **DEATH** from electrocution or fire, the light control is **ONLY** for indoor use.

NOTICE: To comply with FCC and/or Industry Canada rules (IC), adjustment or modifications of this receiver and/or transmitter are prohibited, except for changing the code setting or replacing the battery. **THERE ARE NO OTHER USER SERVICEABLE PARTS.**

Tested to Comply with FCC Standards for Home or office use. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

MODES OF OPERATION

The module can be programmed to a remote control or a garage door opener.


REMOTE CONTROL OPERATION:

Allows you to activate the module from a remote control.




GARAGE DOOR OPENER OPERATION:

Allows you to synchronize the module with your garage door opener light bulbs. **Example:** The garage door opener light bulbs are set to automatically turn off after 4 ½ minutes, the module will also turn off after 4 ½ minutes.




INSTALLATION & PROGRAMMING


- 1** Plug the lamp into the module and plug the module into an electrical outlet (the LED on the module will flash). **NOTE:** Make sure the lamp is switched ON.

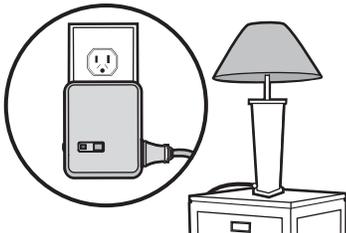

- 2** If the lamp is not ON, press and release the Power button on the module to turn the lamp ON.

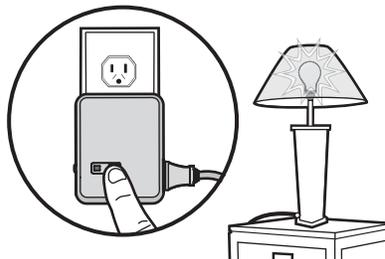



- 3** Press and release the Learn button on the module (the LED on the module will light).

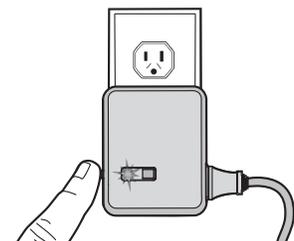


- 4** Press the following (depending on the mode of operation):

Button on Remote Control

Learn Button on Garage Door Opener

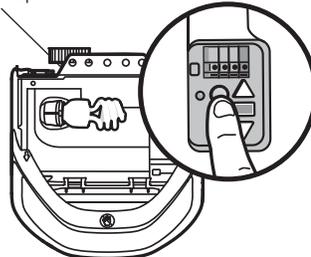

The lamp's light bulb will blink and the LED on the module will turn OFF when the device has been programmed.

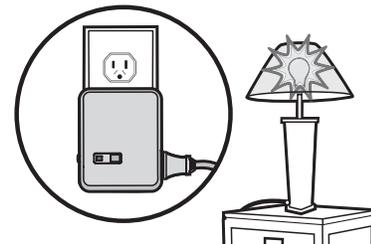

TO ERASE ALL PROGRAMMING

Press and hold the Learn button on the module for 6 seconds. All programming is now erased.

ONE YEAR LIMITED WARRANTY

The Chamberlain Group, Inc. warrants to the first retail purchaser of this product that is free from defect in materials and/or workmanship for a period of 1 year from the date of purchase.