



Shenzhen Hi-Link Electronic Co.,Ltd
HLK-7688A user manual

1. INTRODUCTION.....	3
1.1. BASIC PARAMETER.....	3
2. DIAGRAM.....	4
2.1. TYPICAL APPLICATION.....	5
2.2. SPECIFICATIONS.....	6
3. ELECTRICAL CHARACTERISTICS.....	6
3.1. INLUT VOLTAGE.....	6
3.2. RF PERFORMANCE.....	7
3.2.1. 802.11B 11M.....	7
3.2.2. 802.11G 54M.....	7
3.2.3. 802.11N MCS7(HT20).....	8
3.2.4. 802.11N_MCS7(HT40).....	8
4. MODULE PINS DEFINITION.....	9
4.1. DEFAULT PINS DEFINITION.....	9
4.2. DEGAULT PINS DEFINITION.....	9


1.INTRODUCTION

HLK-MT7688A based on MT7688AN is a low cost and low power consumption IOT module developed by Hi-Link.The module supports Linux, OpenWRT operating system and custom development. It could be widely applied to smart devices or cloud services application with its rich interface and powerful processors.

1.1. BASIC PARAMETERS


- High data processing ability, MCU frequency 580MHz
- 150M Mbps
- Support 802.11b/g/n
- 20/40 Channel bandwidth
- Support 802.11v
- Support AP,STA and AP,STA mixed
- Five 10/100M ETH PORT
- 1 USB2.0 Host interface port
- Interface SPI/SD-XC/eMMC
- Rich peripheral interfaces, SPI,I2C,I2S,PCM,UART,JTAG,GPIO
- Widely used in IOT
- Inbuilt powerful PMU
- Support 16 Multiple BSSID
- Support multiple security methods WEP64/128, TKIP, AES, WPA, WPA2, WAPI
- Support QoS, WMM, WMM-PS
- Support Linux 2.6.36 SDK, OpenWrt 3.10

2. Diagram

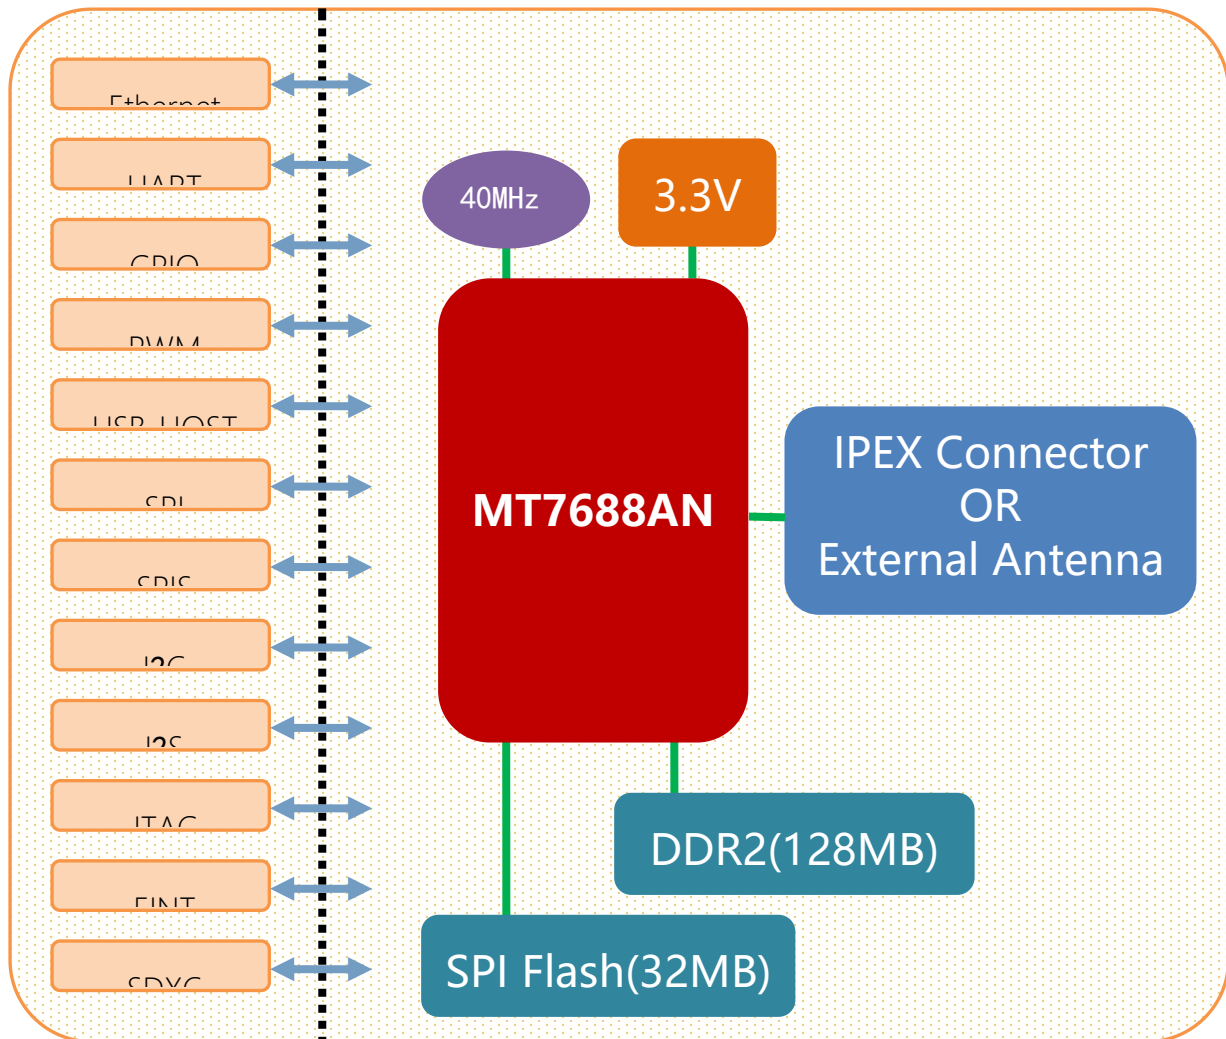

HLK-7688 structure

2.1. Typical application

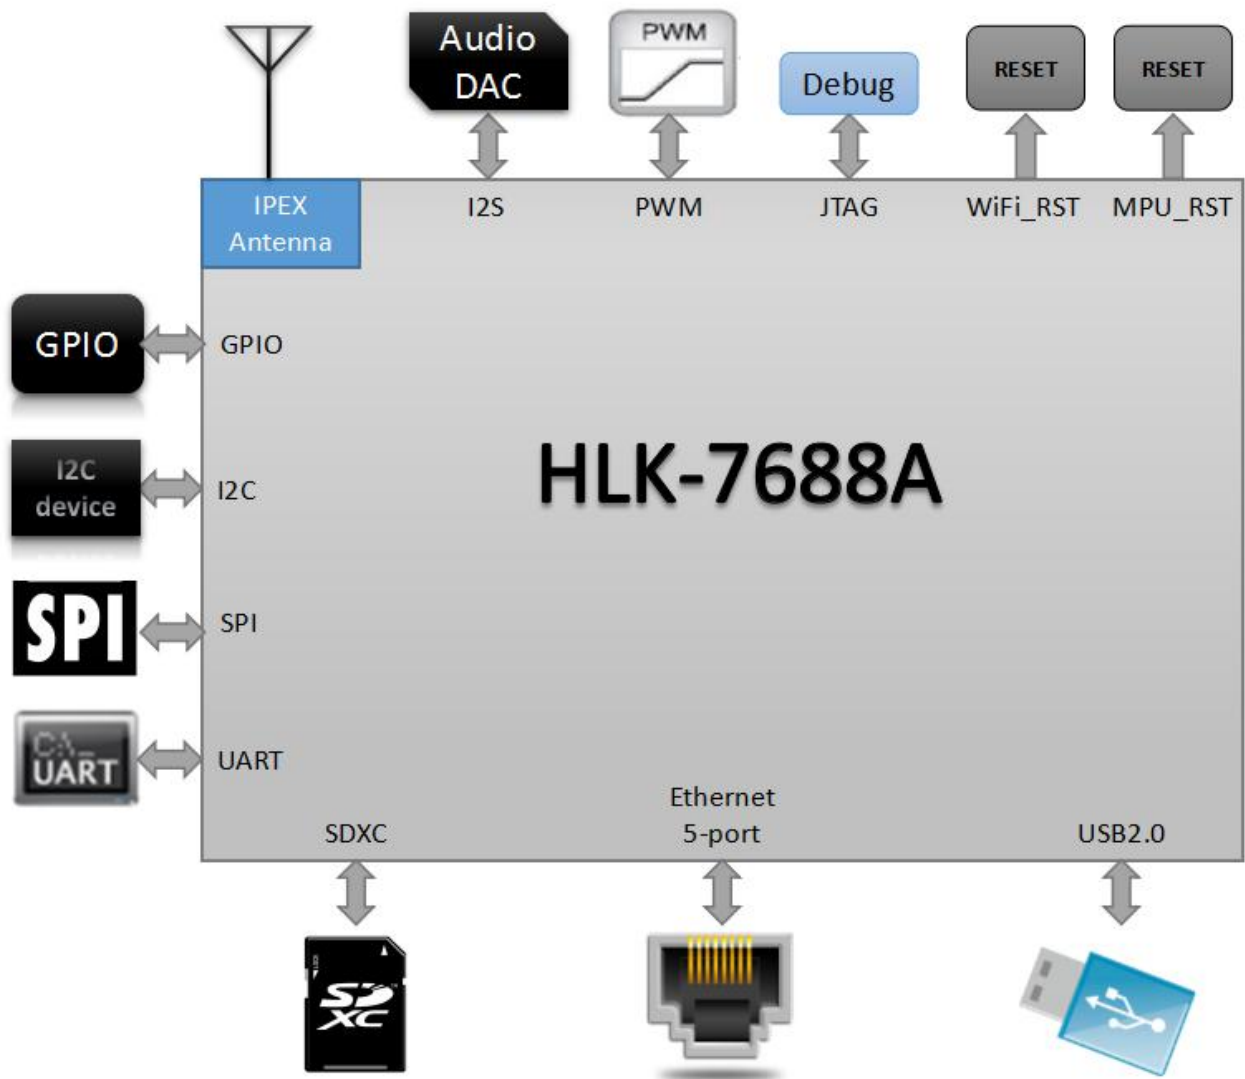

HLK-7688A typical peripheral interfaces

2.2. Specification

Item	Parameter
Model	HLK-7688A
Chipset	MT7688AN
Kernel	MIPS24KEc
Basic frequency	580MHz
RAM	DDR2 128MB
Flash	32MB
Temperature	Environmental temperature: -20°C~55°C
Humidity	working: 0~85% (noncondensing) Storage: 0~85% (noncondensing)
Size	18mm×32.8mm×2.8mm

3. ELECTRICAL CHARACTERISTICS

3.1. Input voltage

Item	Function	MIN Voltage (V)	Typical voltage (V)	Max voltage (V)
VBAT	Power voltage	3	3.3	3.6

I/O	I/O voltage	3	3.3	3.6
-----	-------------	---	-----	-----

3.2. RF PERFORMANCE

3.2.1. 802.11b 11M

802.11b Transmit (Conductive)					
Item	Condition	Min.	Typ.	Max.	Unit
Frequency Range		Channel 1		Channel 11	
Tx Power Level	DQPSK	14	20	16	dBm
Frequency Tolerance		-15	0	15	ppm
Spectral Mask	11MHz→22MHz		40		dBr
	>22MHz		53		dBr
Modulation Accuracy	All Data Rate		15		%
802.11b Receiver (Conductive)					
Item	Condition	Min.	Typ.	Max.	Unit
Frequency Range		Channel 1		Channel 11	
Min. Input	11Mbps PER<8%	-91.5	-89.5	-87.5	dBm

3.2.2. 802.11g 54M

802.11g Transmit (Conductive)					
Item	Condition	Min.	Typ.	Max.	Unit
Frequency Range		Channel 1		Channel 11	
Tx Power Level	OFDM	9	17	11	dBm
Frequency Tolerance		-15	0	15	ppm
Modulation Accuracy	All Data Rate		-31	-28	%
802.11g Receiver (Conductive)					
Item	Condition	Min.	Typ.	Max.	Unit
Frequency Range		Channel 1		Channel 11	

Min. Input	54Mbps PER<10%	-78.0	-76.0	-74.0	dBm
------------	----------------	-------	-------	-------	-----

3.2.3. 802.11n MCS7(HT20)

802.11n_HT20 Transmit (Conductive)					
Item	Condition	Min.	Typ.	Max.	Unit
Frequency Range		Channel 1		Channel 11	
Tx Power Level	OFDM	9	17	11	dBm
Frequency Tolerance		-15	0	15	ppm
Modulation Accuracy	All Data Rate		-31	-28	dB
802.11n_HT20 Receiver (Conductive)					
Item	Condition	Min.	Typ.	Max.	Unit
Frequency Range		Channel 1		Channel 11	
Min. Input	MCS7 PER<10%	-76.5	-74.5	-72.5	dBm


3.2.4. 802.11n_MCS7(HT40)

802.11n_HT40 Transmit (Conductive)					
Item	Condition	Min.	Typ.	Max.	Unit
Frequency Range		Channel 1		Channel 11	
Tx Power Level	OFDM	5.0	17.0	8.0	dBm
Frequency Tolerance		-15	0	15	ppm
Modulation Accuracy	All Data Rate		-31	-28	dB
802.11n_HT40 Receiver (Conductive)					
Item	Condition	Min.	Typ.	Max.	Unit

Frequency Range		Channel 1		Channel 11	
Min. Input	MCS7 PER<10%	-76.5	-74.5	-72.5	dBm

4. MODULE PINS DEFINITION

4.1. DEFAULT PINS DEFINITION

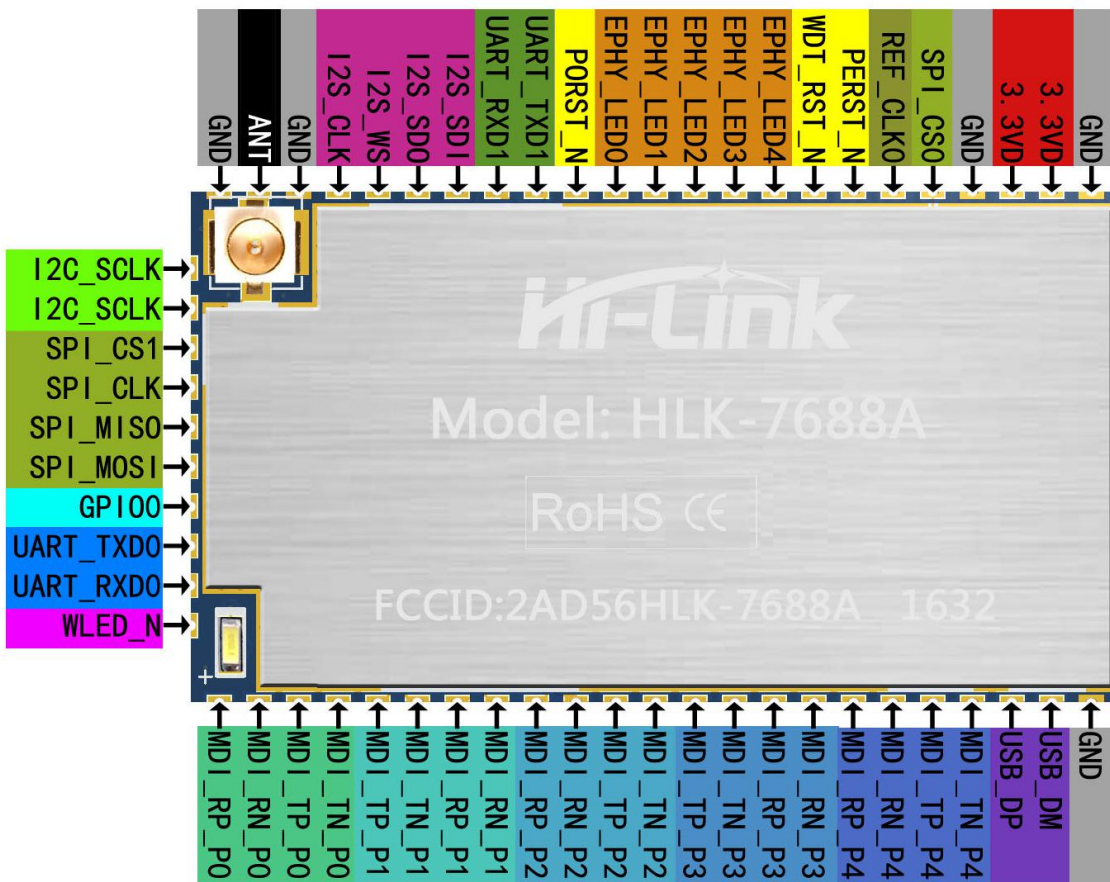

HLK-7688A default definition

4.2. DEGAULT PINS DEFINITION

28	SPI_MISO				GPI09	
29	SPI_MOSI				GPI08	
30	GPI00				GPI011	
31	UART_TXD0				GPI012	
32	UART_RXD0				GPI013	
33	WLED_N				GPI044	WiFi LED
34	MDI_RP_P0				GPI024	
35	MDI_RN_P0				GPI023	
36	MDI_TP_P0				GPI022	
37	MDI_TN_P0				GPI021	
38	MDI_TP_P1	SPIS_CS		PWM_CH0	GPI014	
39	MDI_TN_P1	SPIS_CLK		PWM_CH1	GPI015	
40	MDI_RP_P1	SPIS_MISO		UART_TXD2	GPI016	
41	MDI_RN_P1	SPI_MOSI		UART_RXD2	GPI017	
42	MDI_RP_P2		eMMC_D7	PWM_CH0	GPI018	
43	MDI_RN_P2		eMMC_D6	PWM_CH1	GPI019	
44	MDI_TP_P2	UART_TXD2	eMMC_D5	PWM_CH2	GPI020	
45	MDI_TN_P2	UART_RXD2	eMMC_D4	PWM_CH3	GPI021	
46	MDI_TP_P3	SD_WP	eMMC_WP		GPI022	
47	MDI_TN_P3	SD_CD	eMMC_CD		GPI023	
48	MDI_RP_P3	SD_D1	eMMC_D1		GPI024	
49	MDI_RN_P3	SD_D0	eMMC_D0		GPI025	
50	MDI_RP_P4	SD_CLK	eMMC_CLK		GPI026	
51	MDI_RN_P4	SD_CMD	eMMC_CMD		GPI028	
52	MDI_TP_P4	SD_D3	eMMC_D3		GPI029	
53	MDI_TN_P4	SD_D2	eMMC_D2		GPI027	
54	USB_DP					
55	USB_DM					
56	GND					

Note :

1, All pins are Default function 1.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance.

Note 1: This module certified that complies with RF exposure requirement under mobile or fixed condition, this module is to be installed only in mobile or fixed applications.

A mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons. Transmitting devices designed to be used by consumers or workers that can be easily re-located, such as wireless devices associated with a personal computer, are considered to be mobile devices if they meet the 20 centimeter separation requirement.

A fixed device is defined as a device is physically secured at one location and is not able to be easily moved to another location.

Note 2: Any modifications made to the module will void the Grant of Certification, this module is limited to OEM installation only and must not be sold to end-users, end-user has no manual instructions to remove or install the device, only software or operating procedure shall be placed in the end-user operating manual of final products.

Note 3: Additional testing and certification may be necessary when multiple modules are used.

Note 4: To ensure compliance with all non-transmitter functions the host manufacturer is responsible for ensuring compliance with the module(s) installed and fully operational. For example, if a host was previously authorized as an unintentional radiator under the Declaration of Conformity procedure without a transmitter certified module and a module is added, the host manufacturer is responsible for ensuring that the after the module is installed and operational the host continues to be compliant with the Part 15B unintentional radiator requirements. Since this may depend on the details of how the module is integrated with the host, Shenzhen HaiLingKe Electronic co., Ltd. shall provide guidance to the host manufacturer for compliance with the Part 15B requirements.

Note 5: FCC ID label on the final system must be labeled with "Contains FCC ID: 2AD56HLK-7688A" or "Contains transmitter module FCC ID: 2AD56HLK-7688A".

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The OEM integrator is still responsible for the FCC compliance requirement of the end product, which integrates this module.