

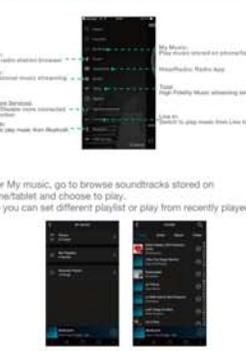


<h2 style="text-align: center;">Wi-Fi & Bluetooth Audio Receiver</h2> <h3 style="text-align: center;">Operating Instructions</h3>	<h4 style="text-align: center;">Main Feature and Function</h4> <p>(a). WiFi & Bluetooth audio receiver Supports Iphone, Ipad, Android phone and all of music player with Bluetooth</p> <p>Support SD card playing</p> <p>Line in supports all music player like MP3/MP4/PC/Mobile phone by 3.5mm AUX line in port.</p> <p>(b). Simple control & Simple connection "Mode" key for easily switching between Wi-Fi/Bluetooth/Line in "WPS" key for quick setup of Wi-Fi connection</p> <h4 style="text-align: center;">Remote control</h4>  <p style="text-align: center;">01</p>	<h4 style="text-align: center;">Product description</h4>  <p>(1) Mode switch: Switch between Wi-Fi, Bluetooth and AUX in mode (2) Mode display: Display playing mode (3) AUX in/Line in: Audio input, connect with music player like smart phone/MP3 (4) AUX Out/Line out: Audio output, connect with speaker (5) Optical output: Audio output, connect with Home Audio System (6) WPS: Wi-Fi searching and connecting (7) Micro USB for power: power port</p> <p style="text-align: center;">02</p>	<h4 style="text-align: center;">Specification</h4> <p>(a). Connections Wi-Fi: 802.11 b/g/n 150Mbps Bluetooth: BLE V4.0 AUX in: 3.5mm for line in AUX out: 3.5mm for line out Optical: Digital audio output Micro USB: Power port</p> <p>(b). Keys M: Mode switch WPS: Start Wi-Fi connection</p> <p>(c). Playback support Airplay/DLNA wifi audio streaming Supports Qplay, Spotify connect playback Multi room playback control via internet Popular APP supported Lossless audio format supported(WAV, FLAC, APE, AAC)</p> <p>(d). Playback support IOS version: IOS 6 or above Android: Android 4.0 Ice Cream Sandwich or above</p> <p style="text-align: center;">03</p>	<h4 style="text-align: center;">Install App and connect receiver to a Wi-Fi network</h4> <p>(a). Before connection your receiver with Wi-Fi and Smart phone/Tablet, please check the following:</p> <ol style="list-style-type: none"> Download and install the MUZO Player app by scanning below QR code, or search "MUZO" in Apple APP store/Google Play Store. Enable Wi-Fi on your Smart phone/Tablet and make sure receiver and smart phone/tablet are in router Wi-Fi range, the MUZO APP and receiver is only working on 2.4G Wi-Fi, doesn't support 5G Wi-Fi. <p>(b). Start to connect</p> <ol style="list-style-type: none"> Plug in USB cable and power on the Wi-Fi audio receiver, Wi-Fi LED is flashing and voice reminding "Searching for Wi-Fi connection" Step 2. Connect your smart phone/tablet with 2.4G Wi-Fi and click MUZO APP.  <p style="text-align: center;">04</p>	<p>Step 3. MUZO APP: For first time connect receiver to network, click Wi-Fi Setup Wizard, and click NEXT to next step</p>  <p>Step 4. Enter Wi-Fi password of Smart phone/tablet connected and click Next 1 2</p>  <p style="text-align: center;">05</p>
---	---	---	--	---	--

正面

<p>Step 5. Make sure the receiver is in range of Wi-Fi, the connection will be done automatically and voice reminds "Wi-Fi connected" and LED light keeps on instead of flashing.</p>  <p>Connect with music player by Bluetooth</p> <p>Power on Receiver and press "M" on receiver or remote control, the Receiver will switch to Bluetooth Mode and blue LED flashing on Receiver(Default mode is Wi-Fi after Receiver is powered on) Enable bluetooth function on smart phone/tablet, and search the bluetooth device "IDMusic", select to connect. LED light keeps on instead of flashing after connected.</p> <p style="text-align: center;">06</p>	<p>Reconnecting: The Receiver will automatically connect to last bluetooth device was paired when power on, if the Receiver does not reconnect automatically make sure that your smart phone/tablet is within at least 1 meter away from the Receiver, go to bluetooth searching on phone/tablet and click IDMusic for bluetooth connection.</p> <h4 style="text-align: center;">Connect with music player by AUX in/Line in</h4> <p>Connect Receiver AUX in with music player(MP3/MP4/Phone/PC), the Receiver will switch to AUX in mode after any music player is connected with AUX in. If play mode doesn't switch please press "M" button on remote control or on Receiver.</p> <p style="text-align: center;">07</p>	<h4 style="text-align: center;">User interface</h4>  <p>Enter My music, go to browse soundtracks stored on phone/tablet and choose to play. Also you can set different playlist or play from recently played.</p> <p style="text-align: center;">08</p>	 <p style="text-align: center;">09</p>	<h4 style="text-align: center;">Switching between Multi Mode and Solo Mode</h4> <p>(a). Multi Mode Make one speaker the master and drag others to join it, what's playing on the master speaker will be synced to all units in the same group.</p>  <p>(b). Solo Mode Separate the Receiver and put different soundtrack on each Receiver, soundtracks will be played individually.</p>  <p style="text-align: center;">10</p>	<h4 style="text-align: center;">Music streaming by Airplay or DLNA without Router</h4> <p>You might be thinking how you can cast music when there is no router around, for example when you are outdoor. This is just simple thanks to Airplay(IOS), DLNA(Android) protocol. With direct connection between your mobile device and the Receiver, you are able to enjoy music in several ways.</p> <p>(a). Airplay(IOS) You might be thinking how you can cast music when there is no router around, for example when you are outdoor. This is just simple thanks to Airplay(IOS), DLNA(Android) protocol. With direct connection between your mobile device and the Receiver, you are able to enjoy music in several ways.</p> <p>(b). DLNA(Android) You might be thinking how you can cast music when there is no router around, for example when you are outdoor. This is just simple thanks to Airplay(IOS), DLNA(Android) protocol. With direct connection between your mobile device and the Receiver, you are able to enjoy music in several ways.</p> <p style="text-align: center;">11</p>
--	---	--	--	---	--

背面

说明书要求:

- 1.封面颜色: 彩色印刷
 - 2.材质: 128g铜版纸 过油
 - 3.尺寸: 80X111MM
- 折页方式: 风琴折

货前请拍照给确认,QQ:393564297

<p>NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help 	<p>Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:</p> <p>(1) this device may not cause harmful interference, and</p> <p>(2) this device must accept any interference received, including interference that may cause undesired operation.</p> <p><small>This device is acting as slave and operating in the 2.4 GHz (2412 ~2462 MHz) band.</small></p> <p><small>RF warning for Portable device: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.</small></p>				
---	--	--	--	--	--

正面

--	--	--	--	--	--

背面

说明书要求：
1.封面颜色：彩色印刷
2.材质：128g铜版纸 过油
3.尺寸：80X111MM
折页方式：风琴折

货前请拍照给确认,QQ:393564297