

# **User Manual of**

DIDJ1001

### A. Basic data


Type		RX7+TX
Working frequency band		2.4GHz
The Shift channel number		2CH
Item		KTH-90700G-L
Distance (m)		100
Input voltage		6V DC
Suitable model		Model Car /Ship
Rx size	Maximum Length (mm)	176.70
	Maximum Height (mm)	222.80
	Maximum Wide (mm)	96.90

### B. BASIC FUNCTION


2CH  
ST  
TH  
D/R

Battery instruction  
Servo inverse  
Low power warning

### C. Appearance size

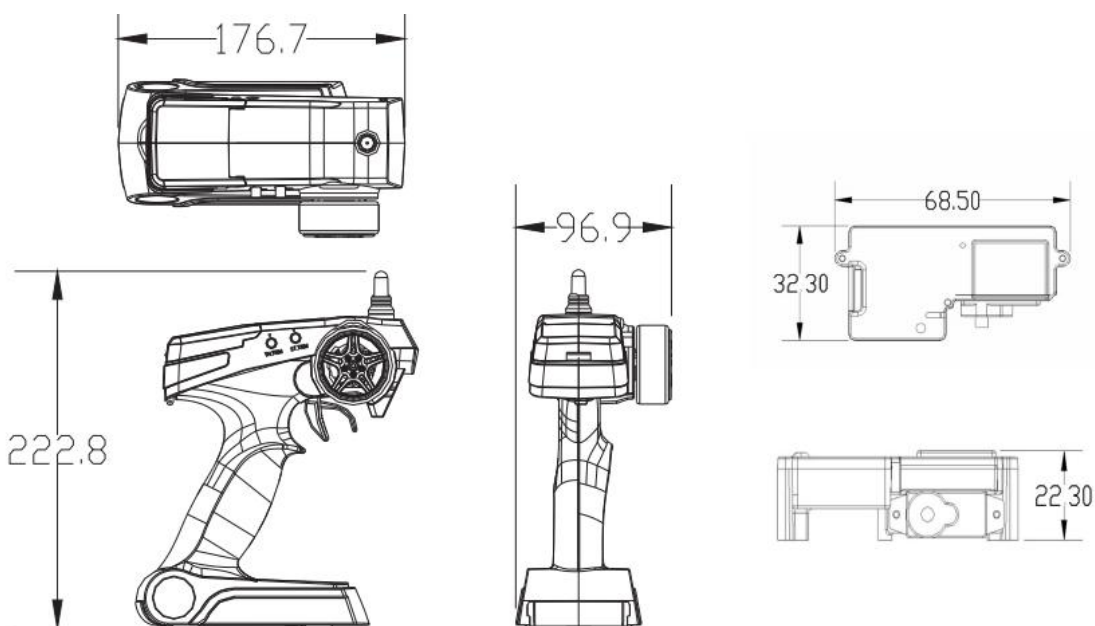


### D. Appearance picture

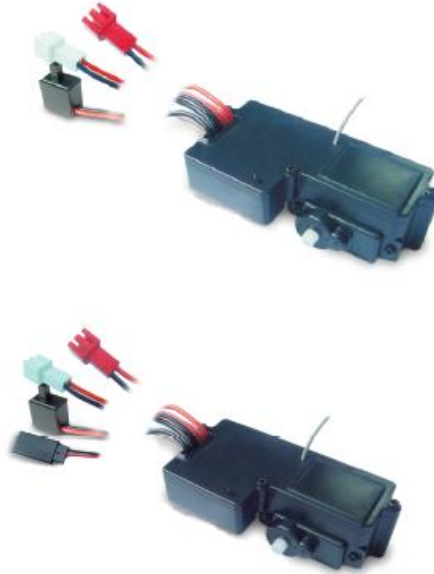


**ITEM NO : 90700G-L/2.4GHz**

**E. Test method**



**1. Function Diagram**

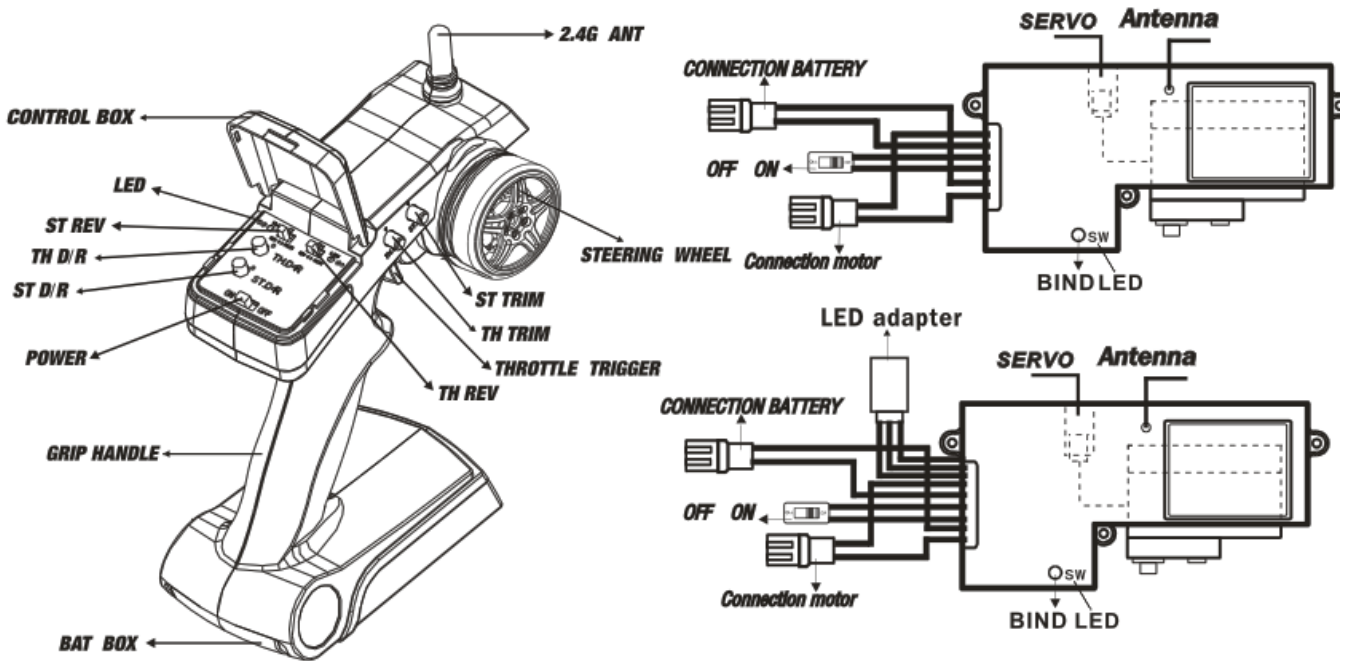

**2. Battery Installation Diagram**

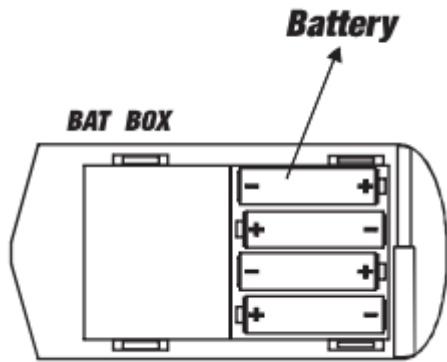

### 3. Connect to RX7 Diagram

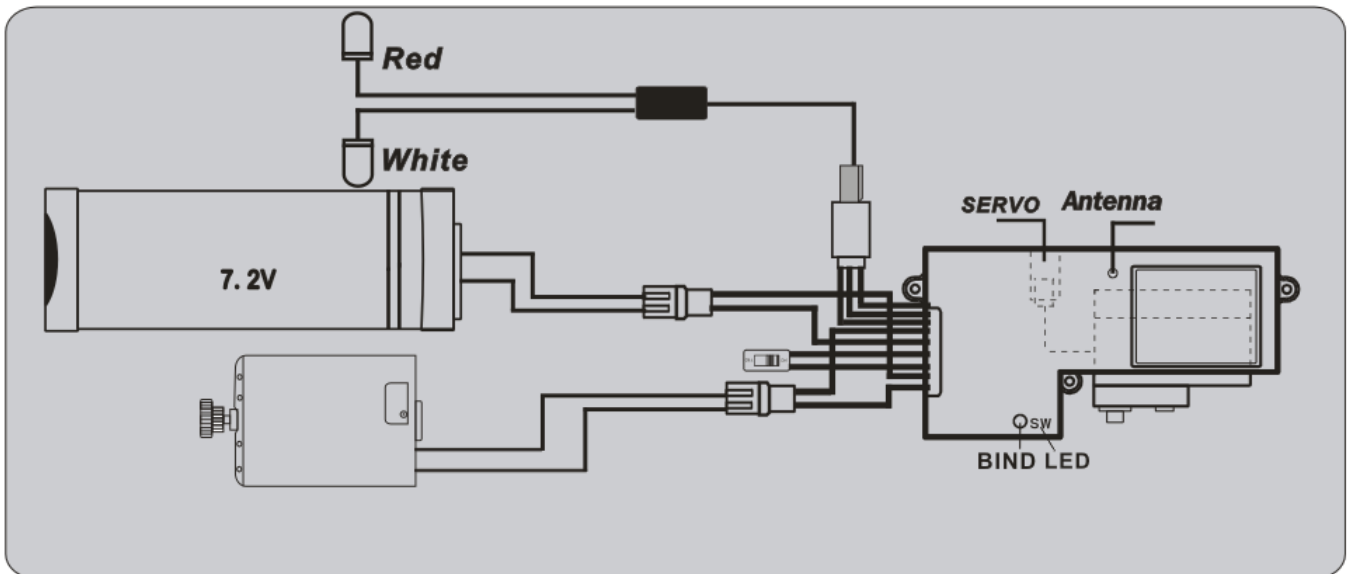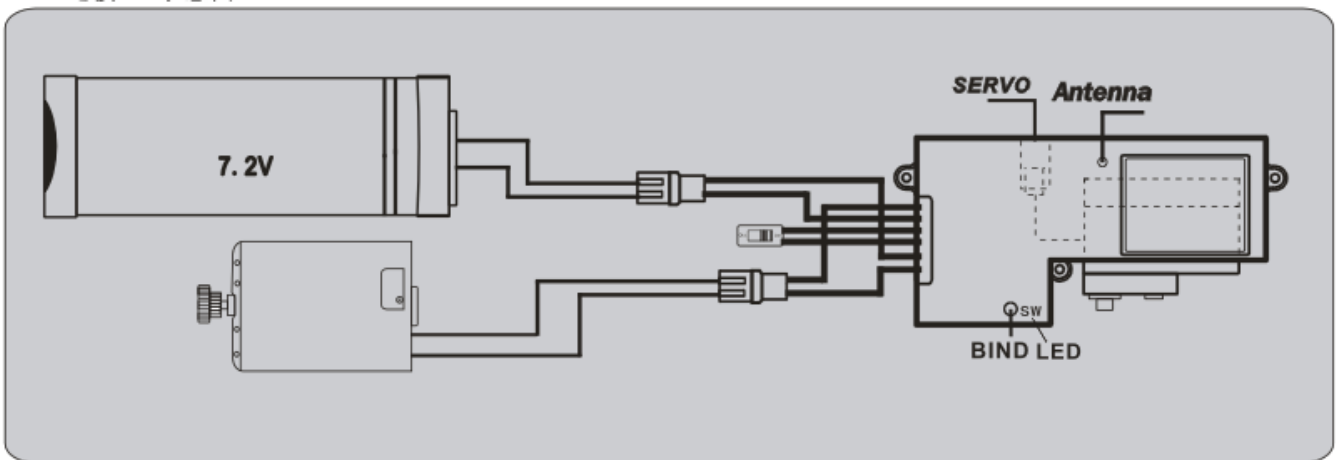

### F. Notice

1. Please distinguish the battery positive and negative pole.
2. If not use it for a long time ,please take out the battery, and store it.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.