

YK433A Snap Remote Button User Manual

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, purs uant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harm ful interference to radio communications. However, there is no guarantee that interference will not o ccur in a particular installation. If this equipment does cause harmful interference to radio or televisio n reception, which can be determined by turning the equipment off and on, the user is encouraged t o try to correct the interference by one or more of the following measures: -


Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is conn ected.

- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Snap Remote Button

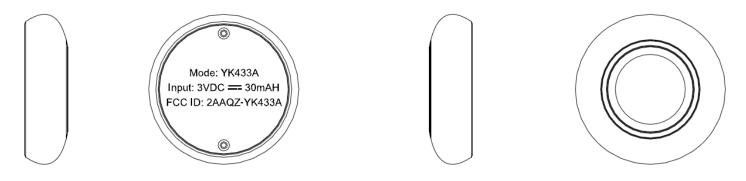

Snap Remote Button:


Press once during Recording: Photo will be taken immediately, and current video recorded will be locked from erasing.

Press once during Non-Recording (but Power On): Recording will be started immediately, photo will be taken, and current video recorded will be locked from erasing.

Re-usable sticker:

wash and dry after every use, and the sticker can be used for multiple times.

Battery installed



Specifications

Operating Voltage: 3V Operating current: max 1mA