## PSESMB 200W - Power Supply

- AC Input Range Selectable By Switch
- Short Circuit/Overload/ Over Voltage/ Over Temperature Protection
- Cooling By Free Air Convection
- Withstand 300VAC Surge Input For 5 Seconds
- Built-in Constant Current Limiting Circuit
- LED Indicator for Power On
- 100% Full Load Burn-in Test
- 5G Anti-Vibration Capability
- No Load Power Consumption Less Than 0.75W
- Operating Temperature Range: -25°C to 70°C




Anaheim Automation's PSESMB series is a cost-effective choice for your power supply requirements. This power supply provides up to 200Watts of power at voltages of 24, 36 and 48VDC with a switch selectable input range of 90-132VAC to 180-264VAC. Each power supply is equipped with an LED indicator for power on in addition to short-circuit, overload, and over voltage protection features. Compact in size and affordably priced, they provide up to 90% efficiency, high reliability, and a long lifetime.

| INPUT  |                           |                    |            |                          |                                |                 |  |
|--|---------------------------|--------------------|------------|--------------------------|--------------------------------|-----------------|--|
| Voltage Range<br>(VAC)                           | Voltage<br>Range<br>(VDC) | Frequency<br>Range | Efficiency | AC<br>Current            | Inrush Current<br>(Cold Start) | Leakage Current |  |
| 90~132 VAC/<br>180~264 VAC<br>selected by switch | 240~370                   | 47~63 Hz           | 89.5-90%   | 4A/115VAC<br>2.2A/230VAC | 60A/115VAC<br>60A/230VAC       | <2mA/240VAC     |  |

| OUTPUT                 |               |                         |                         |                       |                   |                              |                      |                    |                    |                            |                 |
|------------------------|---------------|-------------------------|-------------------------|-----------------------|-------------------|------------------------------|----------------------|--------------------|--------------------|----------------------------|-----------------|
| Part Number            | DC<br>Voltage | Rated<br>Current<br>(A) | Current<br>Range<br>(A) | Rated<br>Power<br>(W) | Ripple &<br>Noise | Voltage<br>Adj. Range<br>(V) | Voltage<br>Tolerance | Line<br>Regulation | Load<br>Regulation | Setup,<br>Rise Time        | Hold Time       |
| PSESMB-0200-1-24V-8.8A | 24V           | 8.8                     | 0~8.8                   | 211.2                 | 150mVp-p          | 21.6~28.8                    | ±1.0%                | ±0.5%              | ±0.5%              | 1500ms,<br>50ms/230<br>VAC | 16ms/230<br>VAC |
| PSESMB-0200-1-36V-5.9A | 36V           | 5.9                     | 0~5.9A                  | 212.4                 | 200mVp-p          | 32.4~39.6                    | ±1.0%                | ±0.5%              | ±0.5%              | 1500ms,<br>50ms/230<br>VAC | 16ms/230<br>VAC |
| PSESMB-0200-1-48V-4.4A | 48V           | 4.4                     | 0~4.4                   | 211.2                 | 200mVp-p          | 43.2~52.8                    | ±1.0%                | ±0.5%              | ±0.5%              | 1500ms,<br>50ms/230<br>VAC | 16ms/230<br>VAC |


## L011590




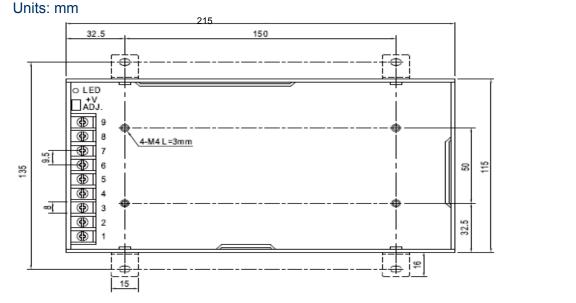


Terminal Pin No. Assignment:

| Pin No. | Assignment | Pin No. | Assignment   |
|---------|------------|---------|--------------|
| 1       | AC/L       | 4~6     | DC OUTPUT -V |
| 2       | AC/N       | 7~9     | DC OUTPUT +V |
| 3       | FG 늘       |         |              |



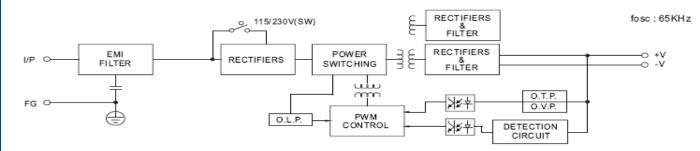

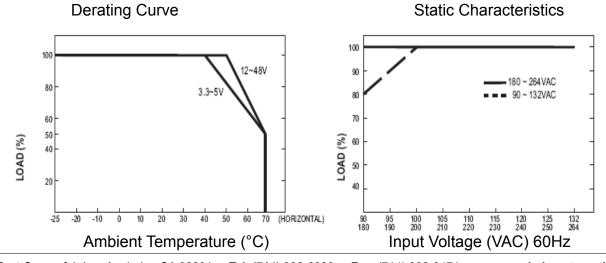

910 East Orangefair Ln. Anaheim, CA 92801 Tel. (714) 992-6990 Fax. (714) 992-0471 www.anaheimautomation.com

**BLOCK DIAGRAM**