



EC360 Quick Start



Copyright © 2007 Huawei Technologies Co., Ltd.

All Rights Reserved

No part of this manual may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks



HUAWEI and HUAWEI are trademarks of Huawei Technologies Co., Ltd. All other trademarks mentioned in this manual are the property of their respective holders.

Notice

The information in this manual is subject to change without notice. Every effort has been made in the preparation of this manual to ensure accuracy of the contents, but all statements, information, and recommendations in this manual do not constitute the warranty of any kind, expressed or implied.

Table of Contents

| | |
|--------------------------------|---|
| Getting to Know Your Data Card | 1 |
| Preparation | 2 |
| Installation Guide | 2 |
| Warnings and Precautions | 4 |
| Technical Specifications | 7 |

Thank you for purchasing Huawei EC360 EV-DO data card.


Huawei EC360 is a wireless network card based on the CDMA2000 1x and CDMA2000 1xEV-DO Rev. A protocols, which can enable you to communicate from your laptop on CDMA networks at a high speed with all the benefits of CDMA technology.

The EC360 provides data transmission at up to 3.1 Mbit/s, and supports receiving diversity.

Note: This manual briefs the profiles of Huawei EC360 EV-DO data card, including the preparation, installation and uninstallation process.

Getting to Know Your Data Card

This is a sketch for Huawei EC360 EV-DO data card. The actual product may differ.

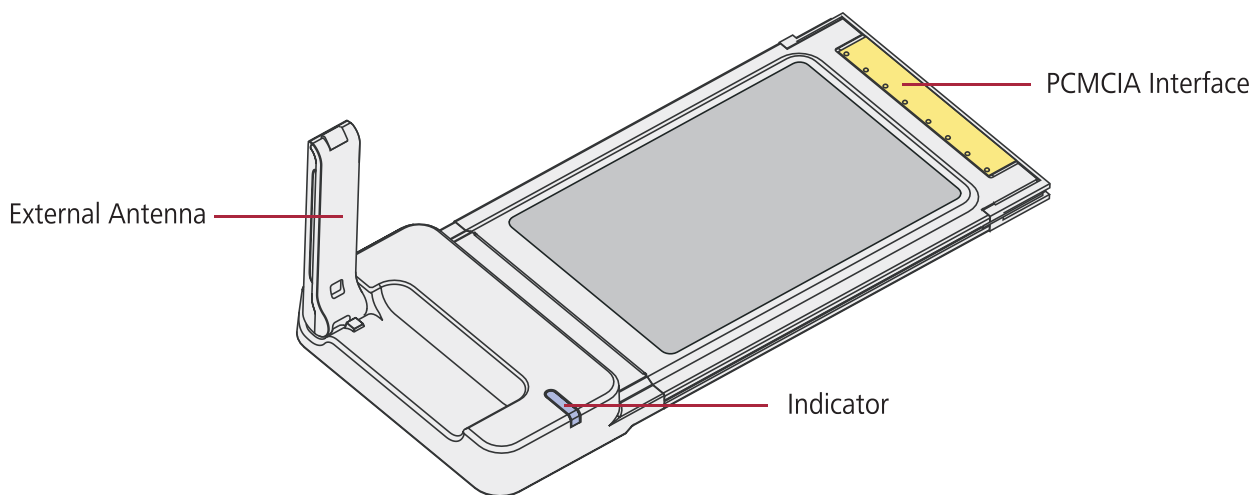

External Antenna

It receives signals.

PCMCIA Interface

It connects the data card to a laptop.

Indicator

It indicates the status of the data card.

- When the data card is powered on, the indicator is steady on.
- When the data card has registered to a CDMA network with no service, the indicator blinks once every 2 seconds.
- When the data card has registered to an idle CDMA network, the indicator blinks twice every 2 seconds.
- When the data card is engaged in a call or a data service, the indicator blinks once every 0.2 second.
- When the data card is removed, powered down, or reset, the indicator is off.

Preparation

To use Huawei EC360 EV-DO data card, the following configurations for the laptop are required.


- Equipped with Type II PCMCIA slot and supporting CARDBUS.
- CPU: 133 MHz Pentium or above. 500 MHz Pentium or above is recommended.
- Memory: 32 MB RAM or above. 128 MB or above is recommended.
- Free space on the hard disk: 100 MB or above.
- Windows XP, Windows 2000 or Window Vista is installed.
- Resolution for the laptop screen: 800 × 600 or above. 1024 × 768 is recommended.

Installation Guide

The procedure for installing the data card program is subject to the operating system installed on your laptop. The following section takes Windows XP as an example.


Note: Make sure that the management program of the data card has been installed before you insert the data card into your laptop.

Installing the Management Program

1. Insert the supplied CD of the data card into the CD-ROM drive of the laptop.
2. The installation program will run automatically. If the program does not respond, run the **Setup.exe** file in the CD drive path of the laptop.
3. Select a setup language and then click **OK**.
4. Follow the prompts of the installation wizard.
5. After the program is installed, the shortcut icon management program is displayed on the desktop  for the data card


Installing the Hardware Driver

1. Insert the data card into the PCMCIA slot of the laptop.

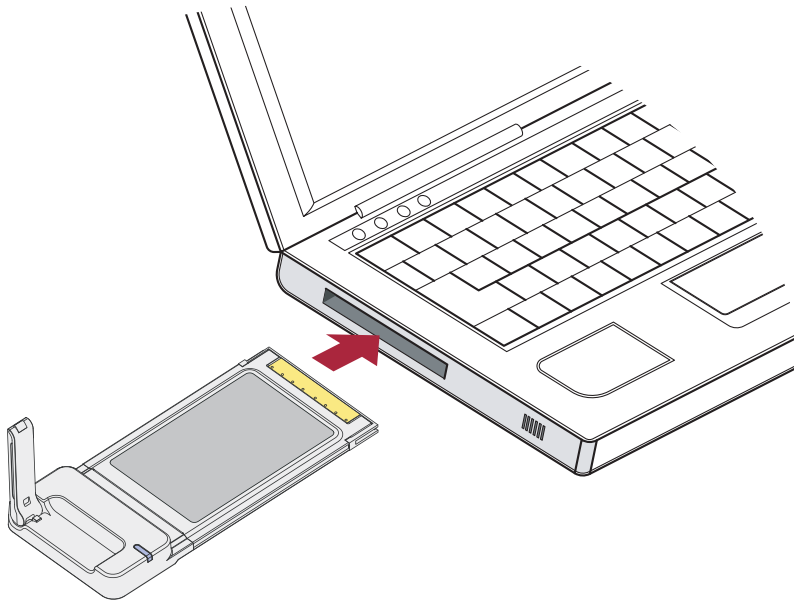

2. The operating system (OS) detects and recognizes new hardware automatically and starts the **Installation Shield Wizard**.


Starting the Management Program

Double-click  on the desktop to start the management program of the data card.

Removing the Data Card

Follow these steps strictly to remove the data card from your laptop. Otherwise, your system may be damaged, even if it is in the standby mode.

Note: Before removing the Data Card, you need to log out of the management program first.

1. Double-click  in the system tray, and then the **Unplug or Eject Hardware** prompt is displayed.
2. Select and stop the hardware related to the data card "Standard PCI to USB Open Host Controller".
3. When the OS displays "It is safe to remove the device", remove the data card from the interface.

Uninstalling the Management Program

To uninstall the management program of the data card, follow any of the three ways:

- Select **Start > Control Panel > Add/Remove Program**.
- Insert the supplied CD into the CD-ROM drive of the laptop and run the installation program. Then, select **Uninstall**.
- Select **Start > Programs > Huawei Data Card > Uninstall**.