

B424-01-PNT & B424IS-01-PNT

Brake Tester



SPECIFICATIONS



B424IS-01-PNT


Site Specifications

Power Requirements	Quick Check Console Supplied
Air Supply Req. (IS Units)	90-150 PSI (6.2-10.3 bar)
Min. Concrete Spec.	3 in. (76 mm) thick, 3000 PSI (20,700kPA) rating
Min. Grout Spec.	.2 in. (5 mm) thick below plates
Max. Longitudinal Slope	.25 in. per foot (6.4 mm per meter)
Max. Lateral Slope	.0625 in. per foot (1.6 mm per meter)

Product Specifications

Max. Wheel Weight	3500 lb. (1588 kg) per wheel
Brake Test Entry Speed	4 to 8 mph (7-13 km/h)
Maximum Wheel Base	165 in. (16764 mm)
Minimum Wheel Base	91 in. (9246 mm)

MODEL FEATURES / DIMENSIONS

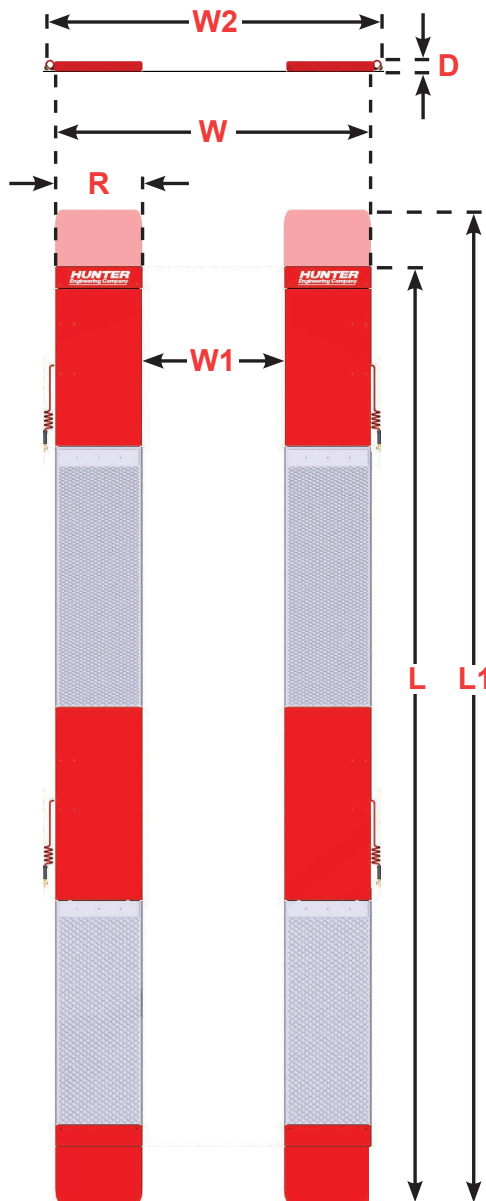

Brake Tester Dimensions

Backout Plates Length (L)	260 in. 6604 mm
Surface Plates Length (L1)	276 in. 7010 mm
Width (W)	87 in. 2210 mm
Inside Width (W1)	39 in. 991 mm
Plates w/ Inflation Station (W2)	94 in. 2388 mm
Runway Width (R)	24 in. 610 mm
Depth (D)	2 in. 51 mm

For inspection information visit:
www.hunter.com/inspection
 For local contact visit:
www.hunter.com/company/findrep.cfm
 For general inquiries visit:
www.hunter.com or call 800 448-6848

Because of continuing technological advancements, specifications, models, and options are subject to change without notice.

Continued on Page 2



B424-01-PNT & B424IS-01-PNT Brake Tester

SPECIFICATIONS

