

# RX16JT, RX16T-PS & RX16T-IS

## Surface Mount Lift Rack

**HUNTER**  
Engineering Company

### SPECIFICATIONS



RX16T-IS Shown

#### Site Specifications


Power Requirements	208-230 VAC, single phase power, 26 Amp
Air Supply Requirements	90-150 PSI (6.2-10.3 bar)
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 PSI (20,700kPA) rating
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)

#### Product Specifications

Max. Vehicle Weight	16,000 lbs. (7257 kg)
Max. Wheelbase	
General Service	187 in. (4750 mm)
Two-Wheel Alignment	182 in. (4623 mm)
Four-Wheel Alignment	158 in. (4013 mm)
Alignment Height	All lock positions
Min. Four-Wheel Alignment	88 in. (2235 mm)
Lifting Speed	1 speed, 60 seconds
Lowering Speed	2 speed, 25 seconds

### MODEL FEATURES / DIMENSIONS / OPTIONS

Features	JT	T-PS	T-IS	Dimension	Options	Add. Length	Kit #
9000-lb Swing Air Jacks (2)	✓	✓	✓	Width (W1) 92.5 in. 2350 mm	Approach Ramp Ext. (Back)	13 in. 330 mm	147-104-1 2 required
2-Speed Lowering	✓	✓	✓	Inside Width (W2) 40 in. 1016 mm	Extended Approach Ramp Ext. (Back)	18 in. 457 mm	147-113-1 2 required
<b>FIA</b> Fully Integrated Alignment		✓	✓	Length (L) 257.5 in. 6540 mm	Conventional Sensor Ext. (Front)	12 in. 305 mm	20-2497-1
<b>POWER SLIDE</b>		✓	✓	Runway Width (R) 26 in. 660 mm	Drive-Thru Kit (Front)	53 in. 1346 mm	20-2498-1
<b>INFLATION STATION</b>			✓	Raised Height (H1) 76 in.(std) / 68 in.(16k) 1930 mm (std) / 1727 mm(16k)	Extended Drive-Thru Kit (Front)	61 in. 1549 mm	20-2501-1
				Stack Height (H2) 9 in. 229 mm			

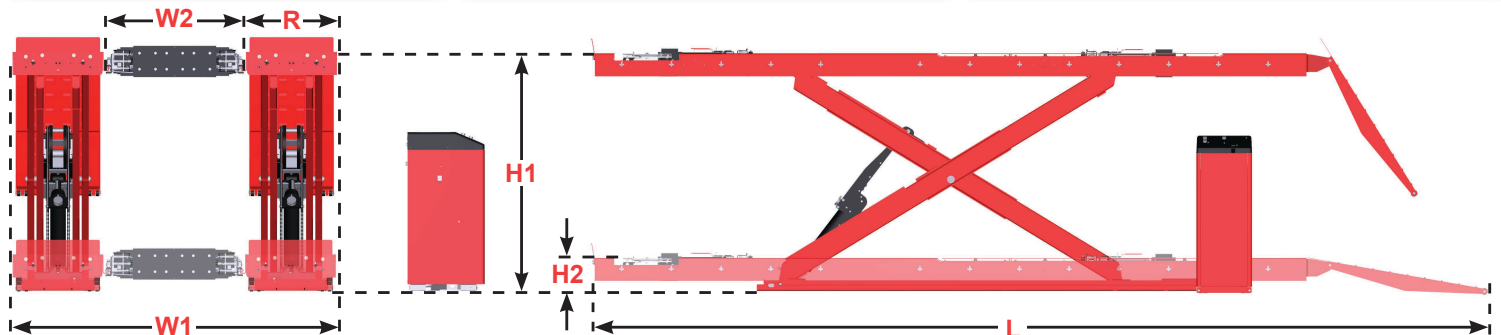

Continued on Page 2



For lift rack information visit:  
[www.hunter.com/rack](http://www.hunter.com/rack)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com)  
or call  
800-448-6848

For local contact visit:  
[www.hunter.com/company/findrep.cfm](http://www.hunter.com/company/findrep.cfm)


Form 6490-T, 12-12  
Supersedes Form 6490-T, 04-12b  
Copyright © 2012, Hunter Engineering Company

# RX16JT, RX16T-PS & RX16T-IS

## Surface Mount Lift Rack

**HUNTER**  
Engineering Company

### SPECIFICATIONS

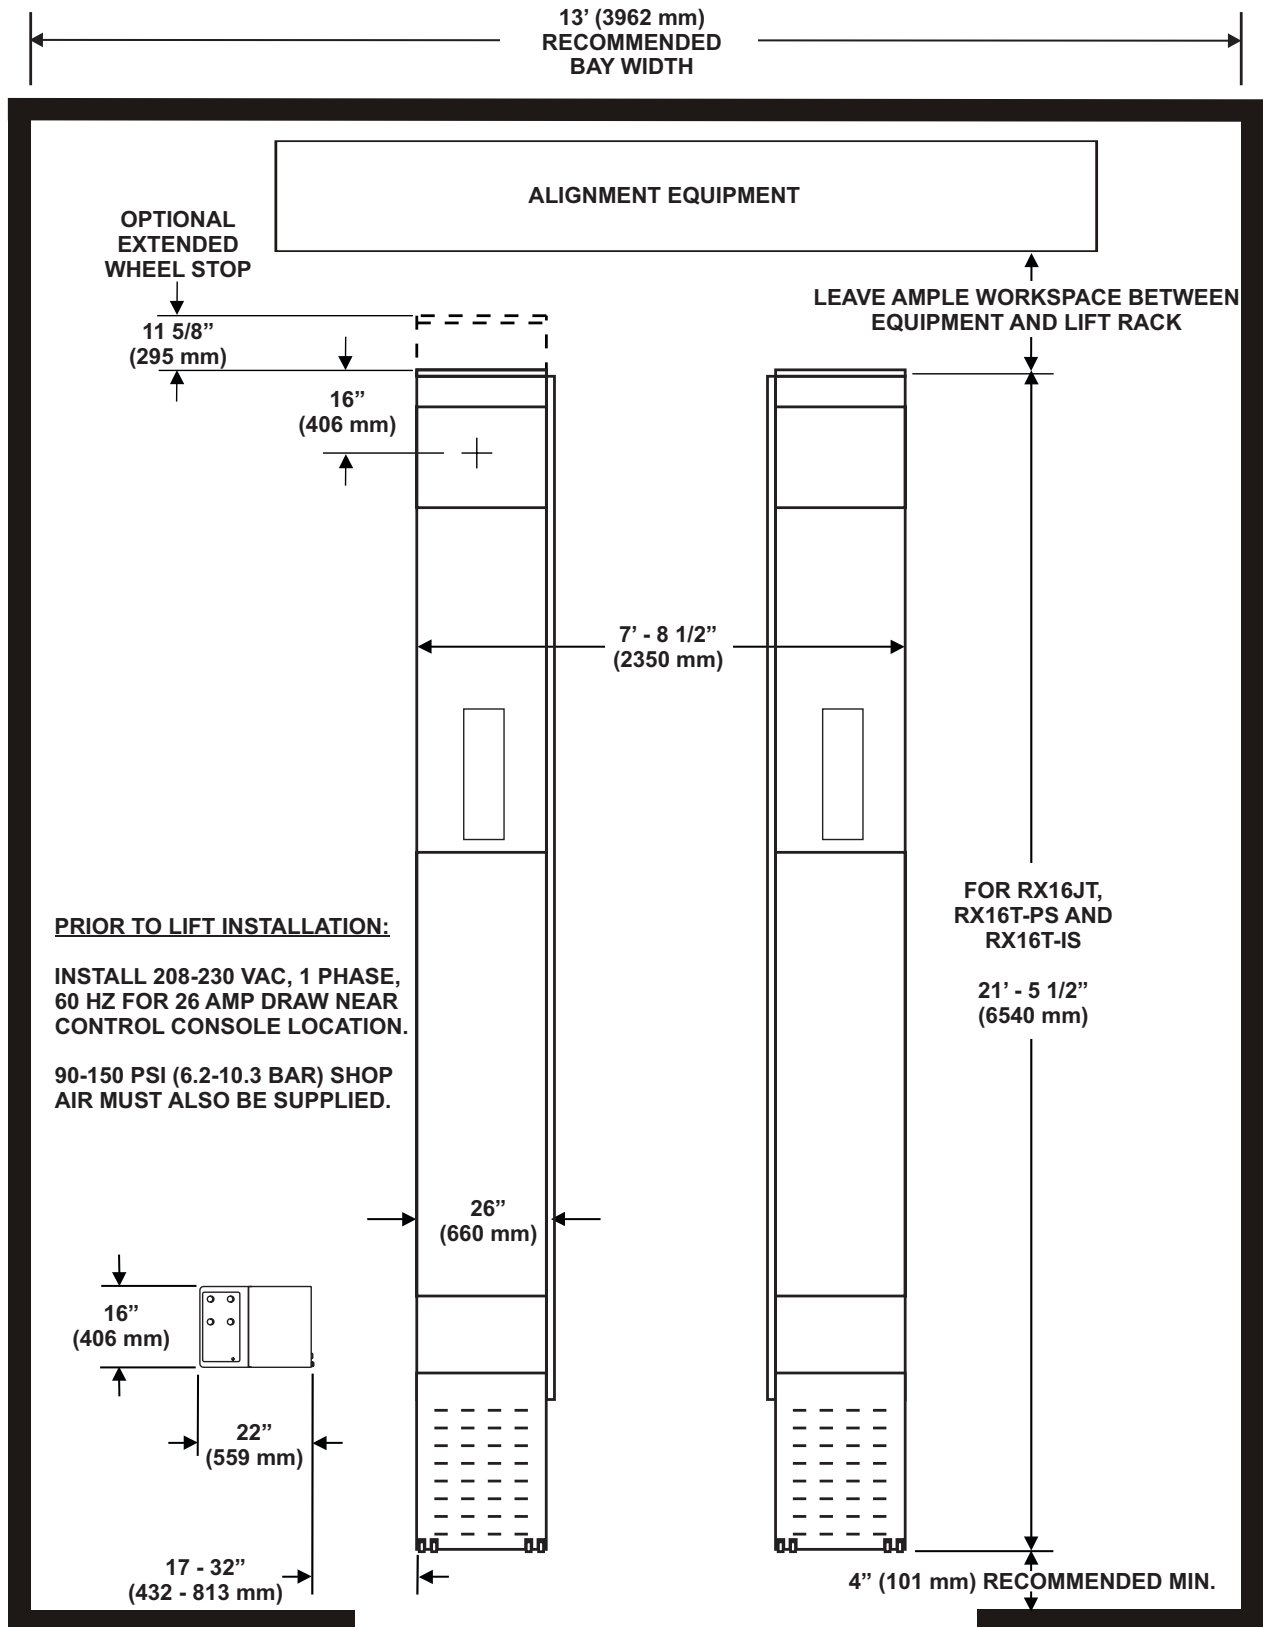

\*Non-standard positioning of control console is limited to a maximum space between console and rack of 6 feet (1829 mm) at the approach ramp end and 17 feet (5182 mm) at the turnplate end. Additional threshold and perhaps hydraulic hoses will be required (refer to Installation Instruction for details).