

Alarm for use with oil, waste oil, diesel fuel, antifreeze, and other fluids with a low flash point.

- The sensor will measure tank Allows customer to continue depths from 8" to 300" (20 to 760 cm) high.
- · LED alarm will display tank levels in English or metric units.
- Alarm displays tank level height and % full.
- The alarm will warn if the tank fluid level is "low" or "high" using an audible alert and lighted display.
- · Customer can silence audible alert once high or low levels have been alerted.

- filling or emptying the tank past alarm level.
- · Alarm/Sensor range inside a building is 30 ft.
- · The alarm can be programmed to display up to six sensors.
- Alarm and sensor are powered by standard 110 VAC/12 VDC power supply.

### **CTS Tank Alarm**

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
10856	CTS Remote Tank	4.0 (1.8)








# **CTS Tank Alarm**

Alarm for use with oil, waste oil, diesel fuel, antifreeze, and other fluids with a low flash point.

### Accessories

MODEL NO.	DESCRIPTION	
10857	CTS Remote Tank Sensor	

## **Dimensions**

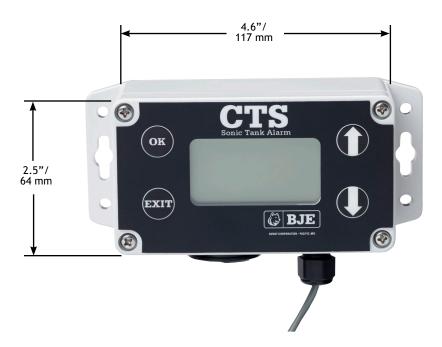





2325 Husky Way • Pacific, MO 63069 (800) 325-3558 • Fax (636) 825-7300 www.husky.com • sales@husky.com

