

Engineering Specification

Model No. **EFL-2602W**

26inches wide LCD Monitor

*Customer's logo display
on Booting is available*



- **Samsung TFT LCD Panel**
- **High performance up-Scaling characteristic**
- **Automatic Scanning**
- **Wide Viewing Angle, High Speed Response**
- **Enhanced Video Quality**
- **Power Supply with enhanced Design Margin**
- **Test Pattern for Burn-in & Self Check**
- **Option**
 - **3 Input (RGB, AV, SVHS)**
 - **DVI Input**
 - **Stereo Audio Amplifier**

Model No. : EFL-2602W	Engineering Specification	Page : 1 of 12
Approval No.: 26-SS -STD	Revision No.: 2.3	Issue Date: May. 17. 2005

Table of Contents

1. GENERAL DESCRIPTION	3
1-1. Overview	3
1-2. FCC RF INTERFERENCE STATEMENT	3
1-3. Quick reference table of Characteristics	4
2. USER CONTROL & OSD	6
2-1. Key Control Board	6
2-2. OSD Menu Screen	7
2-3. OSD Control Functions	8
3. CONNECTOR PIN DESCRIPTIONS	9
3-1. 15 Pin D-SUB Connector	9
3-2. Audio Connector	9
4. STANDARD DISPLAY MODE	10
5. MECHANICAL STRUCTURE	11

1. GENERAL DESCRIPTION

1-1. Overview

Effinet open frame LCD Monitor EFL-2602W is a high performance TFT LCD monitor providing high quality image from the analog RGB / DVI / CVBS / S-VHS input.

This monitor supports wide range signal input from VGA to WXGA resolution at vertical refresh rate of 60Hz. It includes integrated signal processing unit, named LSP (LCD Signal Processor), which had all electronic function for user application.

It is designed for industrial use with up scaling performance adequate for low-resolution application and enhanced design margin for reliability.

It also gives versatile optional features like, DVI input, Video input, Stereo Audio amplifier, Boot up custom logo and custom designed frame.

1-2. FCC RF INTERFERENCE STATEMENT

NOTE :

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures.


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio, TV technical for help.
- Only shielded interface cable should be used.

Finally, any changes or modifications to the equipment by the user not expressly approved by the grantee or manufacturer could void the users authority to operate such equipment.

Model No. : EFL-2602W	Engineering Specification	Page : 3 of 12
Approval No.: 26-SS -STD	Revision No.: 2.3	Issue Date: May. 17. 2005


1-3. Quick reference table of Characteristics

Panel	Size	26" Diagonal
	Active Display Area	575.77 x 323.71 mm
	Type No.	Samsung, LTA260W2
	Number of Pixels	1366 (H) x 768 (V)
	Pixel Arrangement	RGB Vertical Stripe
	Pixel Pitch	0.511 mm x 0.511 mm
	Color Depth	16.7M True Color
	Surface Treatments	Hard Coating (3H), Haze 44%
	Viewing Angle (CR≥10)	Horizontal : Θ L 85 degrees Θ R 85 degrees Vertical : Φ H 85 degrees Φ L 85 degrees
	Contrast Ratio	Typ. 1000 : 1
	Response Time	Rise time(tr) : 10ms(Typ.) Fall time(tf) : 6ms(Typ.)
	Average Brightness	Typ. 500 cd/ m ²
	Frame Rate	Typ. 60Hz
	Panel Dimension	(WHD) 626.0 x 373.0 x 51mm
	CCFT	16 Lamps
Scanning Frequency	Horizontal	30 ~ 60KHz
	Vertical	50 ~ 60Hz
Resolution	Prime	1280 x 768 @ 60 Hz
	Standard	720x400 @70 Hz 640x480 @60 Hz 800x600 @60 Hz 1024x768 @60 Hz 1280x768 @60 Hz
Input Signal	RGB (Video / Sync)	RGB Analog (0.7Vp-p, 75ohms) / H/V Separate (TTL)
	CVBS	Composite Video 1Vp-p, 75ohms
Sync	Type	Separate H/V sync, Composite, SOG (Sync-On-Green)
	Level	TTL level (V high ≥ 2.0V, V low ≤ 0.8V)
	Polarity	Positive or Negative
Input Signal Interface	RGB	15pin D-Sub
	Video	RCA Jack - 1 ea.

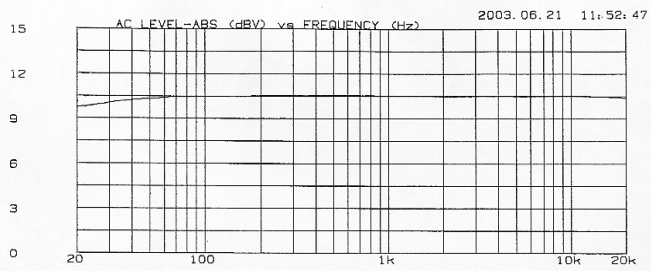	S-Video	SVHS Jack - 1 ea.
Compatible Color System		NTSC / PAL / SECAM
Power	AC Input	AC 90 ~ 265V @60/50Hz, Universal Power
	Max. Power dissipation	110 Watts
Regulation (Safety, Ergonomics, EMC)		CUL (UL+CSA), CE, FCC #801, KICOX Venture Center, 188-5, Guro-dong, Guro-gu, Seoul, Korea Effinet Systems, Inc.  E243543 Model: EFL- 2602W Power: 100 - 240V ~ 60/ 50Hz, 1.5A SER. NO: CAUTION: TO PROVENT ELECTRIC SHOCK, DO NOT REMOVE BACK. NO USER-SERVICEABLE PARTS INSIDE.REFER SERVICING TO QUALIFIED SERVICE PERSONNEL. THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:(1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIED OPERATION. FCC ID: RY8EFL2602W Made in Korea
Environmental Conditions	Operating	Temperature: 0 to 50°C / Humidity: 8 to 80%
	Storage	Temperature: -20 to 60°C / Humidity: 5 to 90%
White Color Temperature		12000°K : CIE x=0.272±0.015 / y=0.277±0.015
Demonstrated MTBF		More than 20,000 hours
Audio (Optional)	Mono / Stereo	Stereo
	Input Audio Jack	3.5mm mini jack
	Audio Output	Nominal 1.3 Wrms at 8 ohms <i>* No external power for audio operation is needed</i>
	Speaker Connector	Molex 5240: 2p(Left), 3p(Right); <i>* Speaker side: Molex 5102</i>
	S/N Ratio	Over than 80dB
	THD	Under 10% (THD: Total Harmonic Distortion)
Audio (Optional)	Frequency Response	




2. USER CONTROL & OSD

2-1. Key Control Board

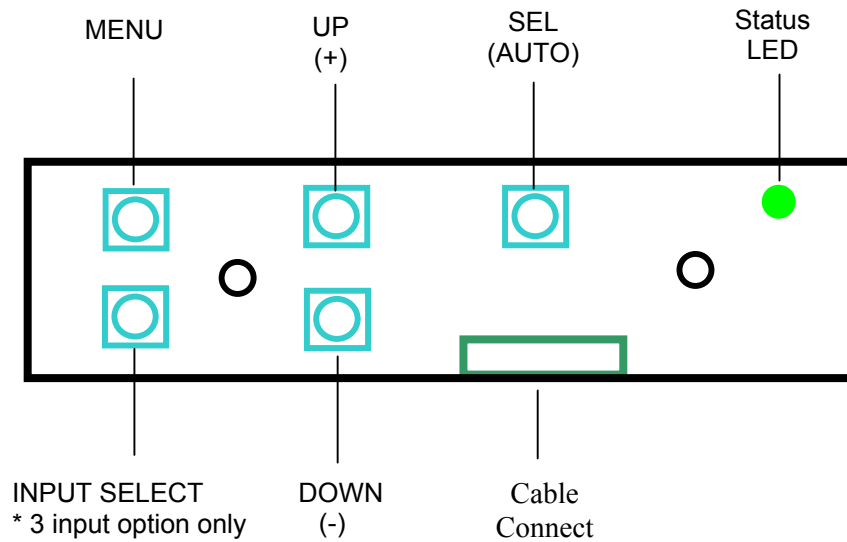

SWITCH NAME	SWITCH FUNCTIONS
MENU	▪ Activate / Deactivate the OSD Menu Window. ▪ Move cursor to Main Menu from sub-menu.
SEL (AUTO)	▪ Move cursor in the Sub-Menu(Brightness ↔ Mode) ▪ Auto Tracking (Pressing "SEL" key)
UP(+)	▪ Move cursor at Main Menu(Picture / Utility) ▪ Increase the value of the selected function
DOWN(-)	▪ Move cursor at Main Menu(Picture / Utility) ▪ Decrease the value of the selected function.
INPUT SELECT	▪ Select the input signal(RGB → Video → S-Video → RGB...) ▪ When power off / on, the last memoried input mode will be displayed. ▪ Apply for 3 input model.

2-2. OSD Menu Screen

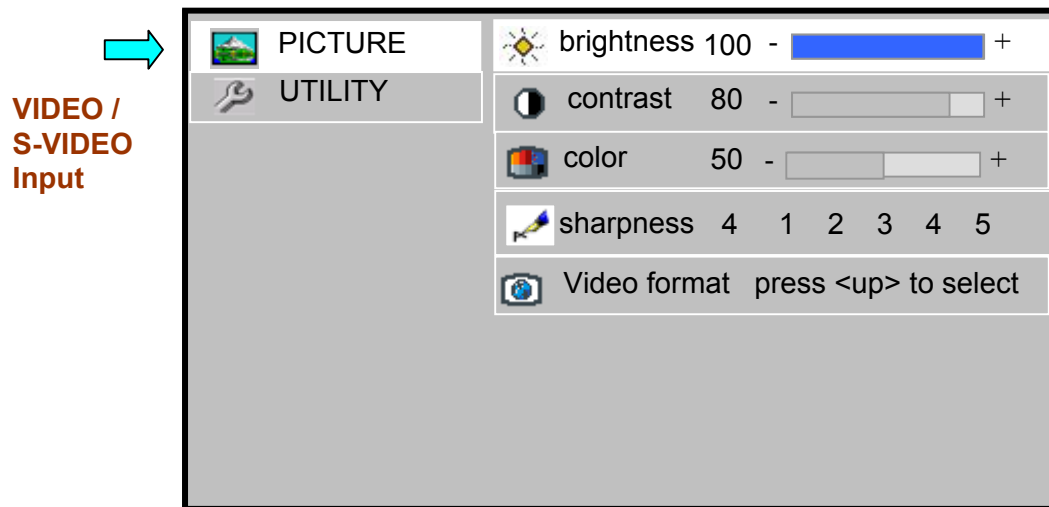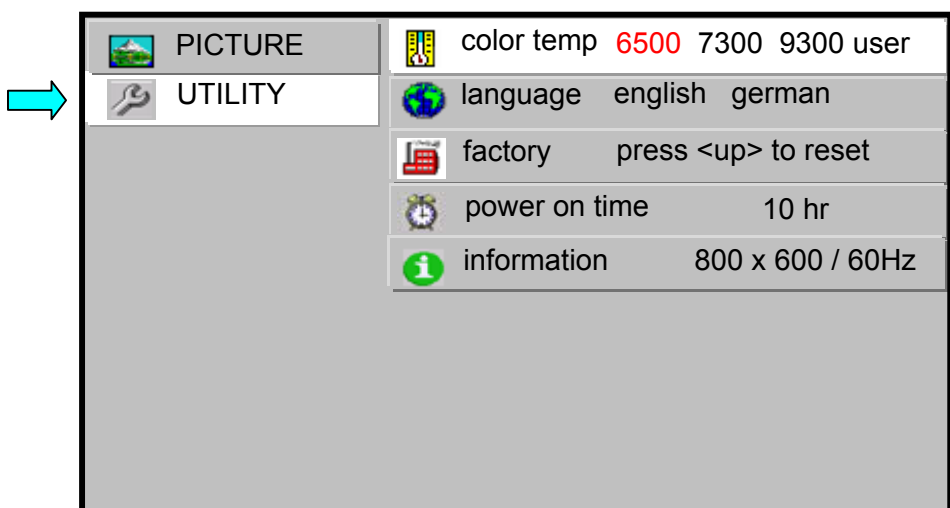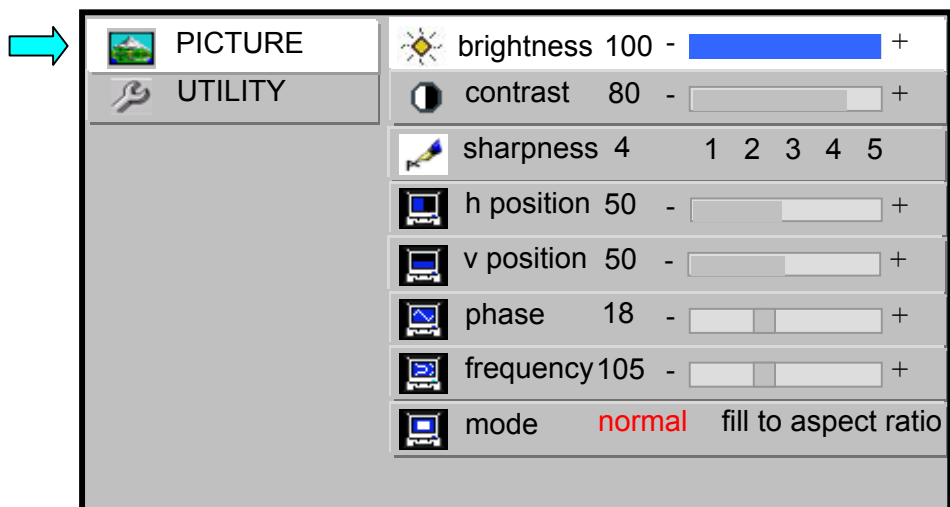

2-3. OSD Control Functions


CONTROL	FUNCTION
Auto Tracking	Automatic screen adjustment process. If there is any noise on the screen or screen shift, just press “SEL” button. Since this monitor is equipped with “Auto Tracking” function, it will automatically configure the monitor setting.
Brightness	Adjust the brightness level of the Display
Contrast	Adjust the contrast level of the Display.
Sharpness	Adjust the sharpness level of the Display
H position	Adjust the position of the display horizontally.
V position	Adjust the position of the display vertically.
Phase	Adjust the clock phase of the display.
Frequency	Adjust the clock frequency of the display
Mode	Select the video aspect ratio. It depends on the input video format.
COLOR TEMP	Choose different preset color temperatures (12000/7300/9300) or set your own customized color parameters.
Red /Green / Blue GAIN	Adjust the Red/ Green / Blue Gain
Language	Select the OSD language
Factory recall	Recall the factory setting value.
Power On time	Displayed the total power on time.
Information	Displayed the resolution of input signal
Color	Set the color(saturation) level
Tint(Hue)	Set the hue level. Only for the “NTSC” system
Video Format	Select the corresponding input video system. “Auto” setting means monitor automatically recognize the input video system. – Default setting AUTO, NTSC M, NTSC 4.43, PAL M, PAL BGDHI, PAL N SECAM
Self Test Pattern	To enter auto burn-in mode, press “Up” key first and then “Sel” key simultaneously for 3 seconds. On this mode, Red – Green – Blue – White – Black test pattern will be displayed. Press Menu key for returning normal display mode.

* Brightness and Contrast value can be set individually for each input mode.


* Color Temperature can be set individually for RGB and Video(S-Video).

3. CONNECTOR PIN DESCRIPTIONS

3-1. 15 Pin D-SUB Connector

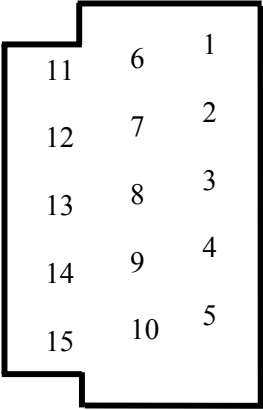Shape and pin number	Pin	Description	Pin	Description
	1	Red	9	No Connection
	2	Green	10	Ground - Sync
	3	Blue	11	No Connection
	4	Ground	12	No Connection
	5	Ground	13	Horizontal Sync
	6	Ground - Red	14	Vertical Sync
	7	Ground - Green	15	No Connection
	8	Ground - Blue		

3-2. Audio Connector

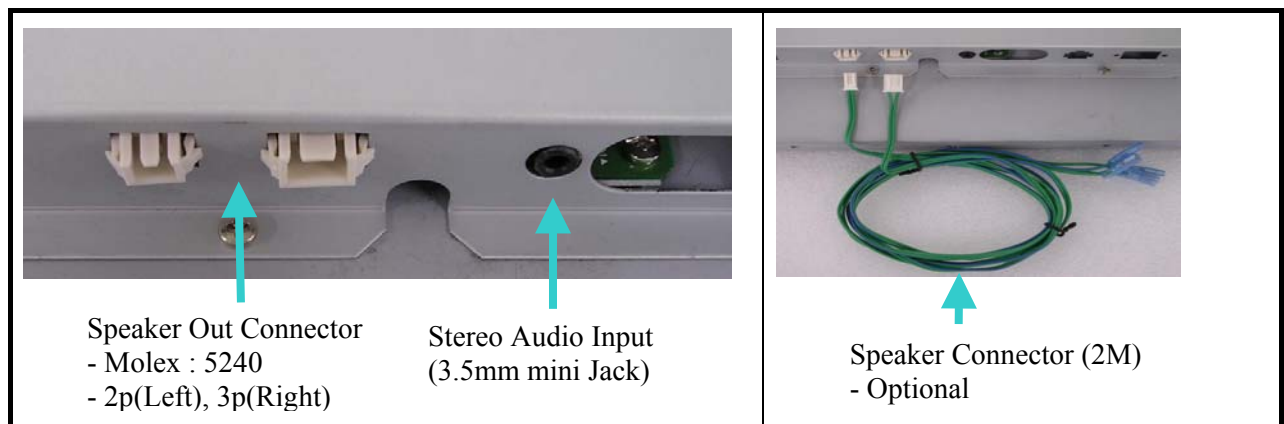


4. STANDARD DISPLAY MODE

No.	Mode	Resolution	Horizontal		Vertical		Pixel clock
			Frequency	Polarity	Frequency	Polarity	
1	VGA	720 x 400	31.47 KHz	N	70.0 Hz	P	28.322 MHz
2		640 x 480	31.47 KHz	N	60.0 Hz	N	25.175 MHz
3	SVGA	800 X 600	35.16 KHz	N / P	56.3 Hz	N / P	36.000 MHz
4		800 X 600	37.88 KHz	P	60.3 Hz	P	40.000 MHz
5	XGA	1024 X 768	48.36 KHz	N	60.0 Hz	N	65.000 MHz
6	WXGA	1280 X 768	47.7 KHz	N	60.0 Hz	P	80.152 MHz

5. MECHANICAL STRUCTURE

5.1 Front View

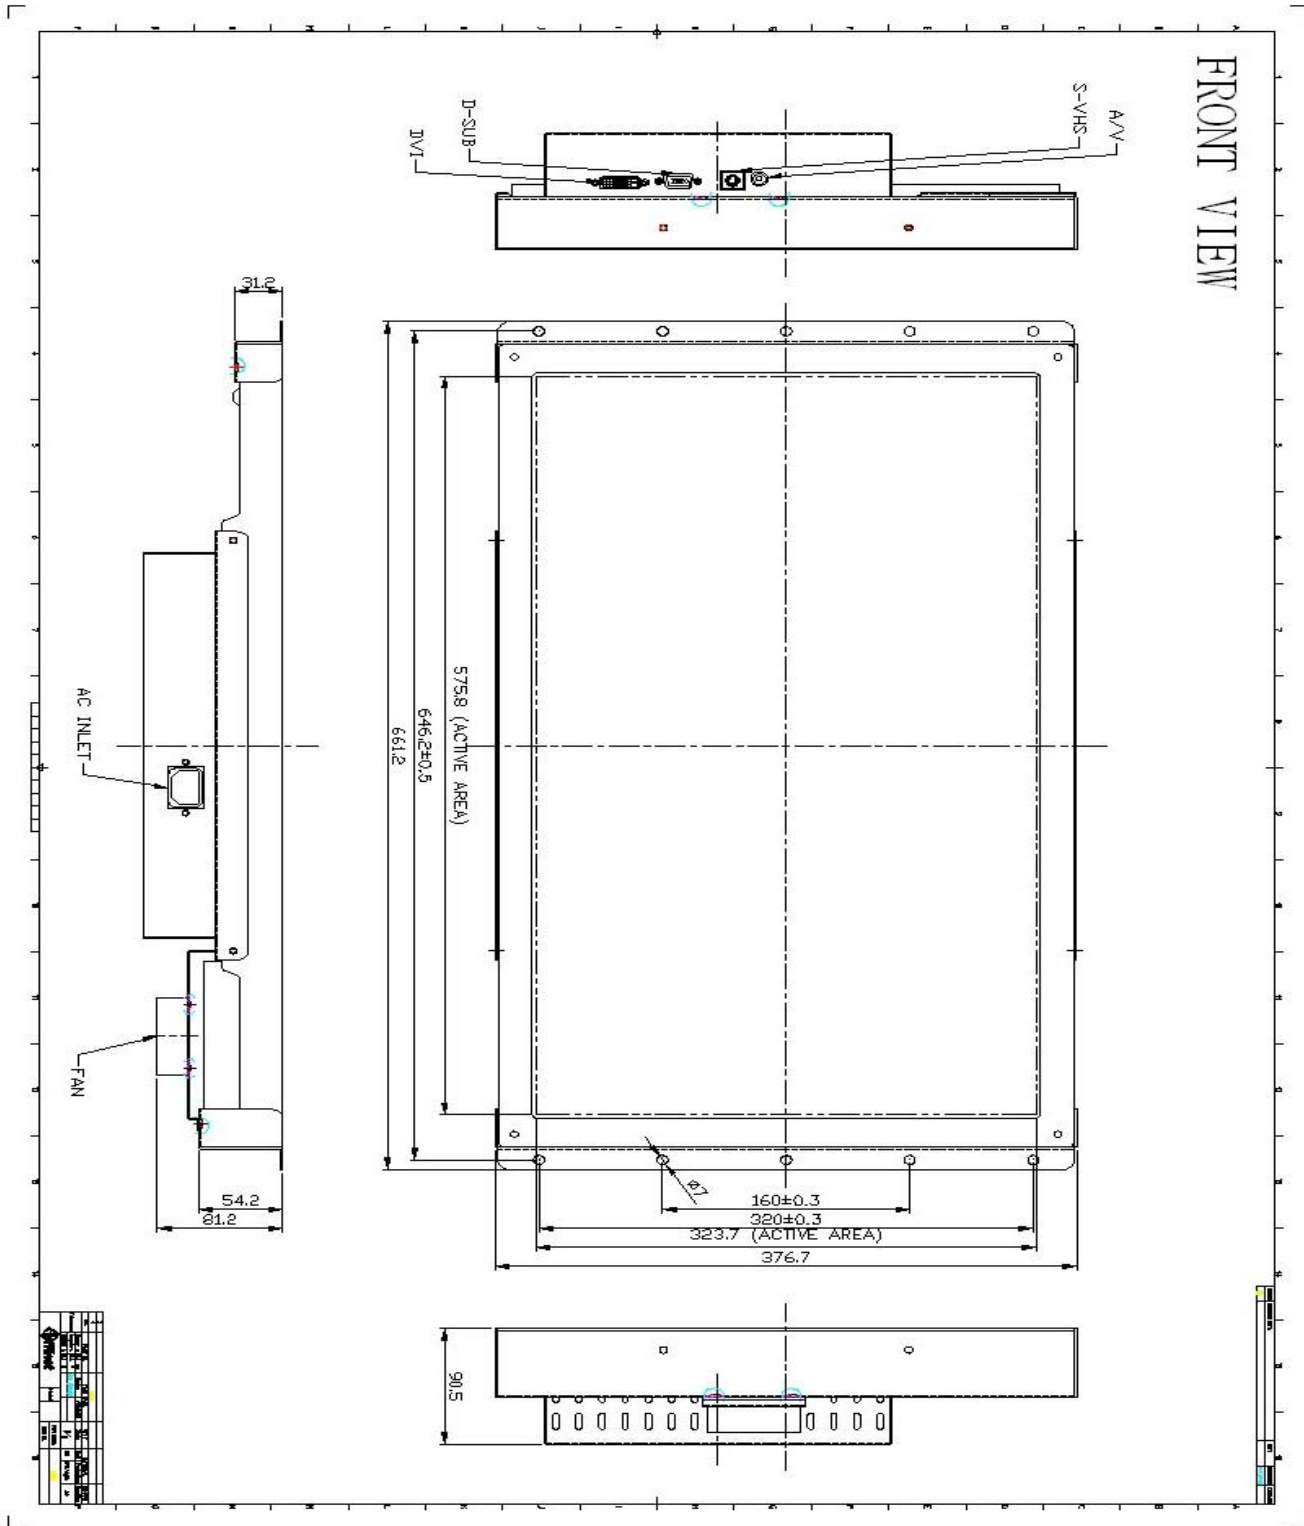

5-2. Rear View

