
Intellian FB500

Ultimate Marine FleetBroadband

Antenna Systems







With the standard built-in Wi-Fi feature, the web- based user interface can be accessed via any web browser including Wi-Fi enabled smartphones via the FB500's secure Wi-Fi (WLAN). The Wi-Fi connection also offers wireless Push-to-Talk (PTT) service to smartphone users using free PTT apps downloadable from smartphone (e.g. Zello) without having to add any additional hardware to the terminal.

Ultimate Global Maritime Terminal

Weighing 34.1 lbs and 28.3 inch high, the Intellian FB500 is an ultimate FleetBroadband maritime terminal.

Simultaneous Voice and Data Access

With 432kbps data rates, FB500 provides simultaneous access to data services, voice and text messaging.

Matching Dome Solutions

FB500 ships with an Intellian i6 dome as a standard, but various dome sizes are also available to match an Intellian t80W, t110W, t130W domes. Now you can select a perfectly matched dome for the best and balanced appearance on your vessel.

Reliable Hardware

Operating on the Inmarsat FleetBroadband Satellite Systems and reliable mechanical construction, approved to Intellian standards, you can be confident of both the quality of the equipment and the global support behind it.

IP Handset

The rugged new plug-and-play IP Handset provides an intuitive user interface on a 2" TFT color screen and mobile phone type keys for making phone calls, texting SMS messages just like on shore.



Intellian FB500

Ultimate Marine FleetBroadband


Antenna Systems


I Technical Specifications

•	
Product Model	Specifications
Intellian FB500	Inmarsat FleetBroadband 500 Marine Satellite Communication Antenna Systems
Dimension and Weight	
ADU	28.3 x 27.6 in (72cm x 70cm) / 34.1 lbs (15.5kg)
BDU	14.1 x 9.8 x 2.6 in (36 x 25 x 6.7 cm) / 8.5 lbs (3.9 kg)
Environmental Conditions	
Operating Temperature	-13°F to +131°F (-25°C to +55°C)
Operating Humidity	[ADU] EN60945, [BDU] 95% non-condensing at +40 $^{\circ}\text{C}$
Water Ingress	[ADU] IP56, [BDU] IP31
Approvals	Inmarsat FleetBroadband/ RTTE/ CE/ FCC
Warranty	3 Years Parts and 1 Year Labor
Global Services	
Voice	Digital 4 kbps Voice, 3.1kHz Audio
Standard IP	Up to 432 kbps
Streaming IP	8, 16, 32, 64, 128, 176, 256 kbps
SMS	Up to 160 characters (3G standard)
Fax	Group 3 (via 3.1 kHz Audio)
Airtime Service	Inmarsat airtime
Frequency Band	
Rx	1518.0 MHz - 1559.0 MHz
Tx	1626.5 MHz - 1675.0 MHz
Ch. Width	[Rx] 10.5 - 189 kHz, [Tx] 21 - 189 kHz
Power Supply and Consumption	
DC Input Range	10 - 32V DC (isolated)
Power (max)	150W @ 10 - 32V (including antenna)


Systems Dimension

ADU (Above Deck Unit) Matching Dome Options

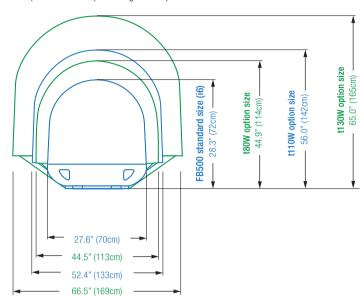

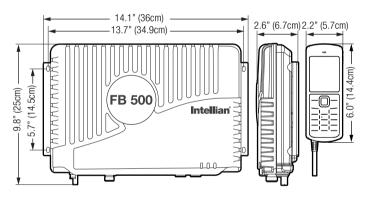


Inmarsat FleetBroadband Global Coverage

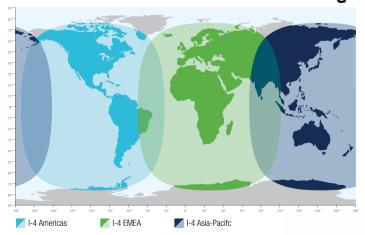

This map depicts Inmarsat's expectations of coverage, but does not represent a guarantee of service. The availability of service at the edge of coverage areas fluctuates depending on various conditions.

Systems Diagram

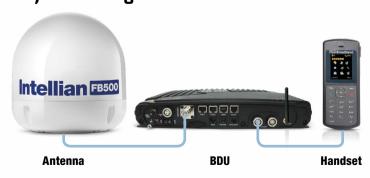

Global HQ Innovation Center/Factory Intellian Technologies,Inc

Seoul Office Intellian Technologies, Inc.

Americas HQ Irvine Office Intellian Technologies USA, Inc. T +1 949 727 4498 F +1 949 271 4183 Toll Free +1 888-201-9223

South America Brazil Office Intellian do Brasil Tecnologia Ltda. **T**+55 21 3176 2048 **F**+55 21 9612 1431

Rotterdam Office Intellian B.V.

EMEAHQ

Southampton Office Intellian Ltd.

