

Wall Speaker

WS-203/210/230



FEATURES

- Using high quality sound source unit
- Favorable exterior design
- Convenience for installation
- High reliability
- Interior Speaker
- WS-203/210 : 1-way SPK system(adapt SUB-CONE, 6" Full range)
- WS-230 : 2-way SPK system(adapt DOME tweeter, 6"-2 way)

SPECIFICATIONS

	WS-203	WS-210	WS-230
Rated Input	3W	10W	30W
Impedance	COM	COM	COM
	3.3k Ω	1k Ω	330 Ω
	5k Ω	2k Ω	500 Ω
	10k Ω	3.3k Ω	1k Ω
Frequency Response	137Hz~16kHz	136Hz~16kHz	126Hz~16kHz
SPL(1M/1W)	91dB	92dB	93dB
Weight(SET)	1.1kg/2.4lb	1.2kg/2.6lb	2.2kg/4.6lb
Dimensions(SET)	315(W)x183(H)x102.5(D)mm 12.4(W)x7.2(H)x4.0(D)in		315(W)x183(H)x124(D)mm 12.4(W)x7.2(H)x4.8(D)in

* Specifications and design are subject to change without notice.


interM

WALL SPEAKER




Polar Pattern Diagram

► WS-203/210

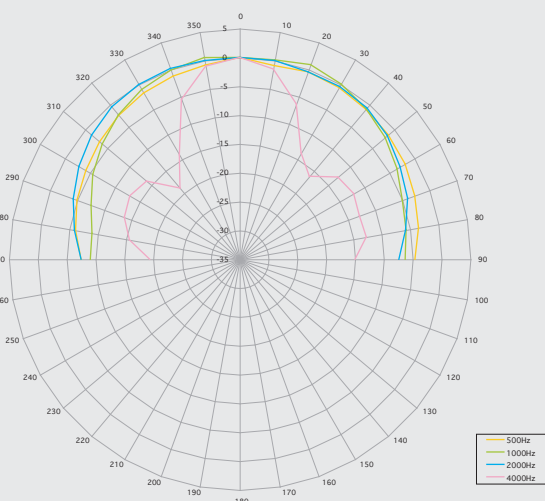


► WS-230

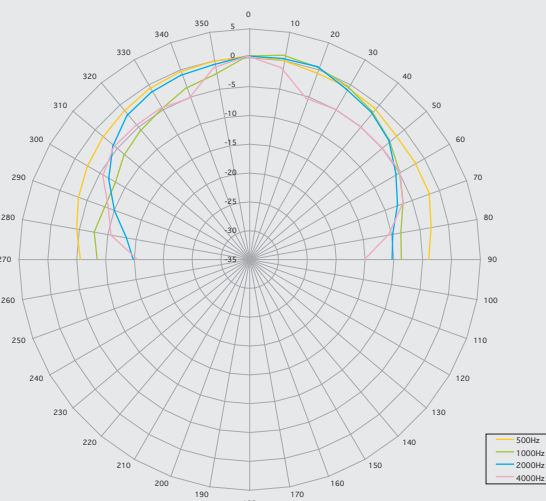


Frequency Response


► WS-203

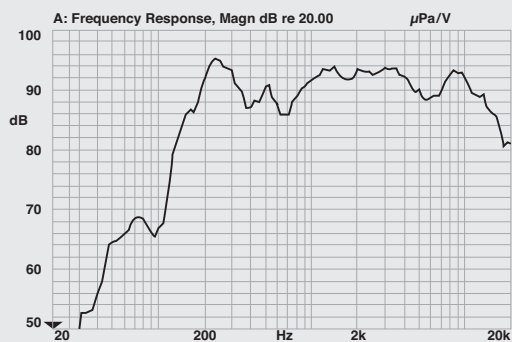

► WS-210

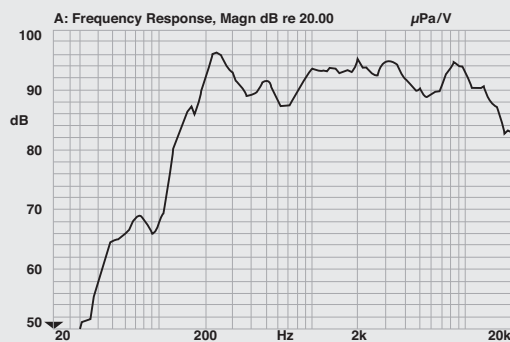

► WS-230

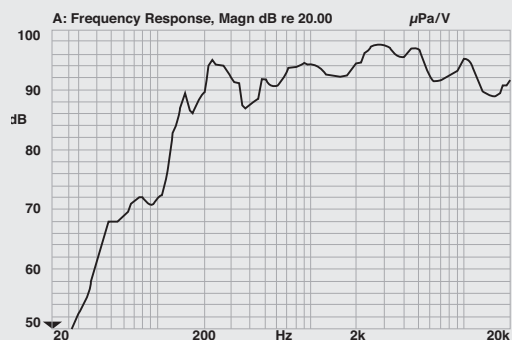

Inter-M Corporation

- OFFICE: 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA
- TEL : +82-2-2289-8140~8, FAX : +82-2-2289-8149

- Home page: <http://www.inter-m.com>
- E-mail: overseas@inter-m.com



NO: 127363

www.inter-m.com