


❖ Sent message details screen



- ① **Status icon**
→P186 "Outbox/Unsent messages list screen"
 - ② **Attachment/SMS icon**
→P186 "Received message details screen"
 - ③ **Mail No./No. of msgs**
 - ④ **Sent date and time**
 - ⑤ **Address type icon**
To Cc Bcc: Receiver (**Cc** and **Bcc** only for i-mode mail)
 - ⑥ **Subject**
- When i-mode mail or SMS is sent while staying overseas (except GMT+08:00), ☎ may appear succeeding the sending date and time.

❖ Creating/deleting folders

- You can set secret attribute to a created folder. In Privacy mode (when Mail & Logs is "Hide secrecy fldrs"), folders with Secret attribute "ON" are not displayed.
- Setting Privacy mode→P114

❖ Creating folders

- In Inbox, up to 40 folders in addition to "Inbox" folder and folder for Message i-oppli can be created.
- In Outbox or Unsent messages, up to 20 folders in addition to "Outbox" "Unsent" folder and the folder for Message i-oppli can be created respectively.

- 1 [✉] ▶ [1] or [4]-[5]
- 2 [ME] ▶ [1]

Changing folder setting: Place the cursor on the folder and [ME] ▶ [3]

Changing the order of the folder: Place the cursor on the folder and [ME] ▶ [7] or [8]

- 3 Set the required items ▶ [☐]

❖ Deleting folders

- "Inbox", "Outbox" and "Unsent" folders cannot be deleted.

- 1 [✉] ▶ [1] or [4]-[5] ▶ Place the cursor on the folder and [ME] ▶ [2] ▶ Authenticate ▶ "Yes"

❖ Checking number of mail items <Check No. of msgs>

- 1 [✉] ▶ [1] or [4]-[5] ▶ Place the cursor on the folder and [ME] ▶ [5]

✓INFORMATION

- When operating from the mail list screen, press [ME], and select "Display" → "Check No. of items".

❖ Displaying mail address <Display address>

- 1 [✉] ▶ [1] or [5] ▶ Select a folder ▶ Select a mail ▶ [ME] ▶ [3] [2]

◆ Moving received/sent/unsent mail to another folder <Move message>

- Mails can be copied to microSD memory card.→P294

<Example> Moving a mail

- 1 ▶ **1** or **4**-**5** ▶ Select a folder
- 2 Place the cursor on the mail and
 ▶ **4** **1** **1**
Moving selected mails :
 ▶ **4** **1** **2** ▶ **Select mails** ▶
- 3 ▶ Select the destination folder ▶ "Yes"

◆ Sorting received/sent mail <Sort>

The sorting order of the mail list in Inbox and Outbox can be changed temporarily. When the list display is closed, sorting is restored to "By date".

- 1 ▶ **1** or **5** ▶ Select a folder
- 2 ▶ **7** **4**
Sorting sent mails : ▶ **5**
3 **1**-**4**

The sorting order of the mail list changes temporarily.

◆ Changing read/unread state of received mail

- Read/unread state of received mails protected cannot be changed.

<Example> Changing a mail from unread to read

- 1 ▶ **1** ▶ Select a folder
- 2 Place the cursor on the received mail to change the state and ▶ **5** **1**
Changing a mail from read to unread : Place the cursor on the mail and ▶ **5** **2**
Changing selected mails from unread to read :
 ▶ **5** **3** ▶ **Select mails** ▶ ▶ "Yes"
Changing selected mails from read to unread :
 ▶ **5** **4** ▶ **Select mails** ▶ ▶ "Yes"
Changing all mails in a folder to read :
 ▶ **5** **5** ▶ "Yes"
Changing all mails in a folder to unread :
 ▶ **5** **6** ▶ "Yes"

◆ **Protecting received/sent mail <Protect mail>**

<Example> **Protecting a mail**

1 [Envelope] ▶ [1] or [4]-[5] ▶ Select a folder

2 Place the cursor on the mail and
[ME] ▶ [3] [1]

- The status icon changes to one of the followings :
Inbox : [Read] (Read), [Unable to reply] (Unable to reply), [Replied] (Replied), [Forwarded] (Forwarded)
Outbox : [Outbox] (Outbox)
Unsent message : [Unsent message] (Unsent message)

Protecting selected mails :

[ME] ▶ [3] [2] ▶ Select mails ▶ [OK]

- Each time you press [ME], you can select/deselect all mails collectively.

Protecting all mails in a folder : [ME] ▶ [3] [3]

Unprotecting a mail : Place the cursor on the mail and [ME] ▶ [3] [4]

Unprotecting selected mails :

[ME] ▶ [3] [5] ▶ Select mails ▶ [OK]

Unprotecting all mails in a folder : [ME] ▶ [3] [6]

◆ **Deleting mail <Delete mail>**

❖ **Deleting received mail**

1 [Envelope] ▶ [1]

- To delete all mails, press [ME] [4] [6], perform authentication and go to Step 4.

2 Select a folder ▶ [ME] ▶ [2]

- To delete a received mail, place the cursor on the received mail to delete and press [ME] [2].

3 [1]-[7]

Deleting selected mails : [2] ▶ Select mails ▶ [OK]

Deleting all mails in a folder : [4] ▶ Authenticate

4 "Yes"

❖ **Deleting sent/unsent mail**

<Example> **Deleting a mail**

1 [Envelope] ▶ [4] or [5]

2 Select a folder ▶ Place the cursor on the mail and [ME] ▶ [2] [1]

Deleting selected mails :

▶ [ME] ▶ [2] [2] ▶ Select mails ▶ [OK]

Deleting all mails in a folder : Select a folder ▶ [ME] ▶ [2] [3] ▶ Authenticate

Deleting all mails : [ME] ▶ [4] [2] ▶ Authenticate

3 "Yes"

Mail logs

Using message logs

- Up to 30 items can be recorded for each of sent mails and received mails. When exceeding the limit, record is overwritten chronologically.


◆ **Displaying message logs**

MENU [Phonebook & Logs] 81
MENU [Phonebook & Logs] 82

<Example> **Displaying Sent message logs**



- Select the party to display details screen.

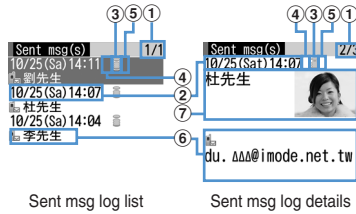

Sent msg log list

Sent msg log details

- ① Page/Total pages (list screen), Log No./ Number of items (details screen)
- ② Sent/received date and time (Local date and time when staying overseas)
- ③ Message log type
 📧 : i-mode mail
 📧 : SMS
- ④ Sent msg log recorded while staying overseas (except GMT+08:00)
 Only a screen of sent message log appears.
 - This may not appear, for example, when sending date and time is not recorded.
- ⑤ Mail address icon in Phonebook (i-mode mail)/ phone number icon (SMS) (if saved in Phonebook), mail address (i-mode mail)/phone number (SMS)
- ⑥ Name, Image

Displaying received message logs : 📧 ▶ 📧

❖ **Using message logs**

Creating i-mode mail : Place the cursor on the log to send mail to and 📧 ▶ Edit the mail ▶ 📧

Creating SMS : Place the cursor on the log and 📧 (1 sec. or more) ▶ Edit SMS ▶ 📧

Adding to phonebook :

- ① Place the cursor on the log to add to Phonebook and 📧 ▶ 4
 - To add data to an existing phonebook entry, press 📧 5.
- ② 1 or 2 ▶ Save the name or mail address, etc.

Phonebook new entry→P75, 76

Making calls : 📞 or 📞

Displaying redial/received call logs : 📞

◆ Deleting message logs

<Example> Deleting a mail

- 1 On the sent/received msg log details screen, place the cursor on the message log to delete and **[M5]** ▶ **[6]** **[1]**

Deleting selected entries : On the sent/received msg log details screen, **[M5]** ▶ **[6]** **[2]** ▶ Select message logs to delete ▶ **[M5]**

Deleting all entries : On the sent/received msg log details screen, **[M5]** ▶ **[6]** **[3]** ▶ Authenticate

- 2 "Yes"

Useful functions of Mail

◆ Copying texts

You can copy characters in mail. Copied characters can be pasted in entry fields in the mail creation screen or phonebook data entry screen.

- The last copied item is recorded until the power is turned OFF and they can be pasted any number of times.

- 1 **[M5]** ▶ **[1]** or **[5]** ▶ Select a folder ▶ Select a mail ▶ **[M5]** ▶ **[2]**

- To copy a selected item, place the cursor on the item to copy and press **[M5]** **[2]**.

- 2 Select a copy option.

Copy text : Copy a specified range of characters.

Copying→P367 Step 2 and the following steps in "Copying/cutting characters"

Copy title : Copy the title.

Copy selected item : Copy selected items (mail address, phone number, etc.).

Pasting characters→P367

◆ Making call from mail <Phone call>

For SMS or mail that the address is "phone number@imode.net.tw", a call can be made without saving.

<Example> Making a call

- 1 **[M5]** ▶ **[1]** or **[4]** **[5]** ▶ Select a folder ▶ Place the cursor on the mail and **[M5]** ▶ **[6]**

- 2 Set a condition for dialing ▶ **[M5]**
Making a call under set conditions→P51

◆ Adding phone number, mail address and URL in the phonebook

<Example> Adding a phone number

- 1 **[M5]** ▶ **[1]** or **[5]** ▶ Select a folder ▶ Select a mail

- 2 Place the cursor on the phone number and **[M5]** ▶ **[4]** **[1]** ▶ **[1]** or **[2]**

Adding to existing phonebook entry : Place the cursor on a phone number and

[M5] ▶ **[4]** **[2]** ▶ **[1]** or **[2]** ▶ Select phonebook data

- 3 Save the name or mail address, etc.
Phonebook new entry →P75, 76

◆ Adding URL as bookmark

- 1 **[M5]** ▶ **[1]** or **[5]** ▶ Select a folder ▶ Select a mail ▶ Place the cursor on the URL and **[M5]** ▶ **[4]** **[3]** ▶ Select a folder to add to

The next procedure→P153 Step 2 in "Recording in Bookmark"

SMS settings

Setting SMS

MENU [Mail] *7

You usually do not need to change SMSC, Address and Type of Number settings.

1 [Envelope] [Right Arrow] [X] [7] [Right Arrow] Set the required items [Grid]

Font type : Select message of Chinese or English language to be sent. The maximum number of characters that can be sent differs depending on the font type.

SMS report request : Select if you request SMS report request when sending SMS.

Keep in SMS center : Select the storage period of sent SMS in the Short Message Center in cases the receiver cannot receive the SMS.

SMSC : Select SMSC when using SMS services except DoCoMo.

Type of Number : Select from "international" or "unknown".

- If selecting "Others" in SMSC field and setting numbers for Address, Type of Number needs to be set to "unknown".

Mail settings

Setting mail function of the terminal

◆ **Sorting mail automatically into designated folders <Sort method>**

MENU [Mail] *3

- Up to 30 sort methods for Inbox and Outbox can be registered.
- Ordinary mails can also be sorted to the folder for Message i-appli, but message i-appli sorting method takes precedence.

❖ **Enabling/disabling sorting automatically**

1 [Envelope] [Right Arrow] [X] [3] [Right Arrow] [1] [Right Arrow] Set the required items [Grid]

❖ **Setting sort methods**

- To set and activate sort method, turn Auto—sort ON/OFF "ON".→P194

1 [Envelope] [Right Arrow] [X] [3] [Right Arrow] [2] or [3]

Registered sort criteria
(In the order of priority levels)










Inbox sort methods 1/1
01 Not in phonebook
02 zhang.aaa@imode.n...
03 工作

• Icon definitions :



- [Envelope] : Sent mail address
- [from] : Received mail address
- [No] : Ph.book number
- [?] : Not in phonebook
- [Sub] : Subject
- [Group] : Ph.book group
- [No Method] : No method

2 ▶ Set sort rule

Specifying mail address :

- To select from message logs
 - ①   or   ▶ Select a message log
- To select from Phonebook
 - ①   ▶ Select the phonebook data
- To enter directly
 - ①   ▶ Enter a mail address ▶ 




Specifying subject :

- ①  ▶ Enter the subject ▶ 

Specifying Ph.book number :

- ①  ▶ Enter the phonebook number ▶  ▶ 

Specifying Ph.book group :

- ①  ▶  or  ▶ Select a group

Specifying Not in phonebook :

- ① 

Specifying No method :

- ① 

3 Select the folder to sort.

- When the folder for Message i-oppli is selected, a message appears notifying the mails in the selected folder is used for the i-oppli. Select "Yes" to set the folder for sorting.

4 Select a priority level.

- A new method is added to the selected row.
- To add the first method, select "Add last".

✓INFORMATION

- If multiple conditions are set, judgement is made from the condition with higher priority and sorted to the folder that matched for the condition first. A mail that was not matched for any condition is saved in the "Inbox" or "Outbox" folder.

❖ Setting sort methods from sent/received mails

- 1 ▶ or ▶ Select a folder ▶ Place the cursor on the mail and ▶ ▶ or ▶ Check the saved contents ▶

The next procedure →P195 Step 3 and the following steps in "Setting sort methods"

- When Auto-sort ON/OFF is "OFF", a confirmation screen for setting to "ON" appears.

❖ Checking, changing or deleting sorting methods

<Example> Checking

- 1 ▶ ▶ or

- 2 Select sorting rule.

Changing sort methods :

- ① Place the cursor on the sort method and

▶

Operations for specifying sort method→P194 Step 2-4 in "Setting sort methods"

- ② "Yes"

Changing sort priority : Place the cursor on the sort method and ▶ ▶ Select the position to move

Deleting :

- ① Place the cursor on the sort method and

▶ or

- ② "Yes"

❖ Setting mail signatures <Signature>

MENU [Mail] 03

❖ Setting whether to insert signature automatically

- 1 ▶ ▶ or

❖ Registering signature

- 1 ▶ ▶ ▶ Enter the Signature ▶

❖ Adding address to mail group <Mail group>

MENU [Mail] 05

- Up to 20 mail groups can be added. Up to 5 mail addresses can be added for 1 mail group.

- 1 ▶

- 2

Creating a mail :

The next procedure→P170

Editing mail group names : Place the cursor on the mail group and ▶

Copying mail group : Place the cursor on the mail group and ▶

Deleting mail group : Place the cursor on the mail group and ▶ ▶ or ▶ "Yes"

Operating mail address registered in a mail group : Select a mail group ▶ Go to Step 5

- 3 Enter the mail group name ▶

4 Select a mail group for registering a mail address.

5 ▶ Set the required items

Editing registered mail address : Place the cursor on the mail address (or name) and ▶ **1** ▶ Edit

Deleting a registered mail address : Place the cursor on the mail address (or name) and ▶ **2** ▶ "Yes" ▶ Go to Step 7

Displaying details of registered mail address : ▶ **3** ▶ When finishing checking ▶ Go to Step 7

6

7

✓ **INFORMATION**

- If no Address Type is set for TO, mail cannot be sent.

◆ **Setting whether to quote message when reply <Reply format>**

MENU [Mail] 041

1 ▶ ▶ **6** ▶ **1** ▶ Set the required items ▶

◆ **Setting Quick reply <Activate quick reply>**

MENU [Mail] *62

1 ▶ ▶ **6** ▶ **2** ▶ **1** or **2**

◆ **Registering quick reply format <Quick reply presets>**

MENU [Mail] *63

- Up to 5 formats can be registered.

1 ▶ ▶ **6** ▶ **3**

2 Selecting a format ▶ Enter a text ▶ ▶ "Yes"

Viewing the message text : Place the cursor on the message text and .

Deleting format : Place the cursor on the format and ▶ **1** ▶ "Yes"

Resetting all formats : ▶ **2** ▶ Authenticate ▶ "Yes"

Adding new format : "<New reply format>" ▶ Enter a text ▶

◆ **Setting display style of mail list <Message list>**

MENU [Mail] *2

1 ▶ ▶ **2** ▶ Set the required items ▶

◆ **Setting if you receive attachments automatically <Incoming msg. attach>**

MENU [Mail] *9

- Files set not to receive automatically are received as Receive option attachment files.→P181

1 ▶ ▶ **9** ▶ Select a file item to receive ▶

- "Tool data" indicates the data of phonebook, bookmark and schedule.
- "Other" indicates Excel, Word, PowerPoint or other data.

✓ **INFORMATION**

- Images or melodies attached to message text are automatically received regardless of this setting.

◆ **Setting whether to play melodies automatically <Attachment auto-play>**

MENU [Mail] *0

1 ▶ ▶ **0** ▶ **1** or **2**

◆ Selecting type of mail to display <By display type>

You can display only the mails of specified type in the received and sent mail lists temporarily. When the list display is closed, sorting is restored to "Display all items".

- 1 [Envelope] ▶ [1] or [5] ▶ Select a folder ▶ [ME] ▶ [7] [2] ▶ [1] or [2]

◆ Changing mail font size

Change the font size to display mails from among the 5 types of "Larger", "Large", "Medium (Standard)", "Small" and "Smaller".

- 1 [Envelope] ▶ [1] or [5] ▶ Select a folder ▶ Select a mail ▶ [ME] ▶ [3] [1] ▶ [1] - [5]

◆ Setting mail reception notification for terminal in operation <Display priority>

MENU [Mail] *4

You can set if you display a receiving screen, reception result screen or Auto sending screen by priority when i-mode mail or SMS is received during the terminal operation.

- 1 [Envelope] ▶ [X] [4] ▶ [1] - [3]

Continue operation : Display none of the receiving screen, reception result screen and sending screen.

Show message : Display the receiving screen, reception result screen and sending screen.

Open:Cont/Close:Show : Continue operation when the terminal is open and prioritizes reception notification when the terminal is folded.

SMS saved to UIM

Saving SMS in UIM

◆ Moving/Copying SMS into UIM

- Maximum number of saved items→P447

<Example> Moving a SMS

1 [Envelope] ▶ [1] or [5] ▶ Select a folder

2 Place the cursor on the SMS and

[Menu] ▶ [4] [2] [1]

Moving selected SMS :

[Menu] ▶ [4] [2] [2] ▶ Select the SMS ▶ [Menu]

Copying a SMS : Place the cursor on the SMS and

[Menu] ▶ [4] [3] [1]

Copying selected SMS :

[Menu] ▶ [4] [3] [2] ▶ Select the SMS ▶ [Menu]


3 "Yes"

◆ Displaying SMS in UIM

MENU [Mail] 812

MENU [Mail] 813

1 [Envelope] ▶ [8] [1] ▶ [2] or [3]



① Page/Total pages

② Status icon

[Envelope] : Unread (able to reply) [Envelope] : Unread (unable to reply)

[Envelope] : Read (able to reply) [Envelope] : Read (unable to reply)

[Envelope] : SMS report request, Missed call notification or Notify recorded message

[Envelope] : SMS error

③ Sent/received date and time

④ Sender/Receiver

⑤ Top of the message

2 Select SMS to display.

① Icon

[Envelope] : Received (able to reply) [Envelope] : Received (unable to reply)

[Envelope] : Sent

[Envelope] : SMS report request, Missed call notification or Notify recorded message

[Envelope] : SMS in UIM

[Envelope] : SMS in SIM card (combined SMS)

[Envelope] : SMS in SIM card (combined SMS in an incomplete status)

② Mail No./No. of msg

③ Icon

[Clock] : Date and time [To] : Receiver

[From] : Sender [X] : Sender (unable to reply)

[Subject] : Subject "UIM Inbox" "UIM Outbox" "SMS report request" "Notify missed call" "Answer videophone"


- When sent SMS is moved or copied to UIM, the sent date and time are deleted from the sent SMS in the UIM. Note that for sent SMS with SMS report request set, the sent date and time are displayed.

- For the SMS which contains error, [From] appears instead of [X] and except [X] does not appear.


- When SMS is received while staying overseas (except GMT+08:00), [Clock] may appear at the end of the receiving date and time.

◆ Moving/Copying SMS in UIM to the terminal

<Example> Moving a SMS to the terminal


1  ▶ **8** **1** ▶ **6** or **7**

2 Place the cursor on the SMS and


 ▶ **3** **1**

Moving selected SMS :  ▶ **3** **2** ▶ Select the SMS ▶ 

Copying a SMS : Place the cursor on the SMS and

 ▶ **3** **3**

Copying selected SMS :  ▶ **3** **4** ▶ Select the SMS ▶ 

3  ▶ Select the destination folder ▶ "Yes"


✓INFORMATION

- When the memory is not enough or the maximum number of saved items is reached, SMS cannot be moved or copied. Unprotected i-mode mail and/or SMS, if any, are not overwritten. Delete unnecessary i-mode mail and/or SMS from folders of Inbox and Outbox.


◆ Deleting SMS from the UIM

- When deleting a sent SMS, the corresponding SMS report request in UIM is also deleted at the same time.

<Example> Deleting a SMS

1  ▶ **8** **1** ▶ **6** or **7**

2 Place the cursor on the SMS and

 ▶ **2** **1**

Deleting selected SMS :  ▶ **2** **2** ▶ Select the SMS ▶ 

Deleting all SMS :  ▶ **2** **3** ▶ Authenticate

Deleting all SMS report request :

 ▶ **2** **4** ▶ Authenticate

3 "Yes"

i-appli

i-ϕpli

Downloading i-ϕpli from sites makes a terminal more convenient. For instance, various games can be downloaded to the i-mode terminal, direct registration to phonebook and schedule from i-ϕpli can be made or Data Box including saving and obtaining image can be operated with some i-ϕpli.

✓INFORMATION

- Any image or movie saved by i-ϕpli or i-ϕpliDX is saved in "i-mode", "Deco-mail picture" or "Deco-mail pict" folder of My Picture, "i-mode" folder of i-motion or added album respectively, or in the i-ϕpli.
- When ring tone is saved by i-ϕpliDX, it is saved in "i-mode" folder of Melody or in the i-ϕpli.


Downloading i-ϕpli

You can download i-ϕpli from sites and store it in the terminal.

- Not saved if downloading of i-ϕpli fails due to poor signal quality, etc.
- The maximum size of i-ϕpli that can be saved is 1 Mbyte.


1 Displaying a site ▶ Select an i-ϕpli

The selected i-ϕpli is downloaded.

- While downloading, press  and select "Yes" to stop downloading.
- When download or communication is interrupted, resuming confirmation screen may appear. Select "Yes" to restart downloading; when "No" is selected, partial saving confirmation screen appears if it is possible. If partial saving is impossible, data already downloaded is deleted. The rest of partially saved i-ϕpli can be downloaded.→P213 Step 3 in "Starting i-ϕpli"


When Software info disp. is "ON"

A confirmation screen of i-ϕpli information and downloading appears.

- The detail information of the i-ϕpli to be downloaded can be displayed by pressing .

Downloading i-ϕpli that uses the saved data, the serial number of your mobile phone/UIM card or microSD memory card

Downloading confirmation screen appears.

- With "Guide" displayed on the guide area, press  to check details of the data used by the i-ϕpli.

When the selected i-ϕpli is already downloaded.

A message indicating that the data is already downloaded appears. When the new version of the i-ϕpli is released, upgrading confirmation screen appears.

When the selected i-ϕpli is already downloaded with a different UIM

Overwriting confirmation screen appears.

2 Select a destination to save.

- Some i-ϕpli shows setting screens for Set stand-by disp. (i-ϕpli stand-by) or Use network. Setting items →P215 Step 1 in "Setting operating condition of i-ϕpli"

3 "Yes"

The downloaded i-ϕpli starts.






- Select "No" to return to the site screen.
- When setting "Set stand-by disp." to "Yes", setting confirmation screen appears.

✓INFORMATION

- Even when downloading failed, deleted i-ϕpli or data deleted at the same time from microSD memory card are not restored.

◆ Viewing i-ϕpli information when downloading <Software info disp.>

You can set if you display i-ϕpli information when downloading i-ϕpli.

-  ▶ [i-ϕpli] ▶   ▶  or 

Starting i-appli


MENU [i-appli] 1

1 [OK] (1 sec. or more)

2 Select a folder.

- Icon definitions :
 - : Preinstalled folder without i-appli
 - : Preinstalled folder with i-appli
 - : Created folder without i-appli
 - : Created folder with i-appli

3 Select i-appli to start.

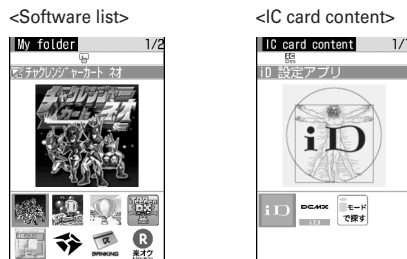

Graphical display

- Icon definitions (Only marks with * are displayed in IC card content.)
 - : Message i-appli
 - : i-appliDX
 - (orange) : i-appli
 - : i-appli setting available for i-appli stand-by display
 - : i-appli set for i-appli stand-by display
 - : i-appli with Auto start setting
 - (Upper half in gray, lower half in orange) : i-appli partially saved
 - : i-appli unavailable due to UIM operation restriction
 - : i-appli of stopped condition by IP (Information Provider)
 - : i-appli downloaded from SSL page
 - : i-appli set as one-key shortcut
 - : i-appli set as two-key shortcut
 - : Search by i-mode (Displayed in preinstalled folder and IC card)
- Each time you press [OK], display view switched in the order of graphical display→list display→thumbnail display.
- When "Confirm every session" is Set NW transmission of the i-appli to be started, connection confirmation screen appears.
- When partially saved i-appli is selected, downloading confirmation screen of the rest appears. The i-appli can be started after the rest is downloaded; when

download is disabled, the i-appli partially saved may be deleted.

- To quit i-appli, operate in the procedure specified for each i-appli. You can also quit i-appli by pressing [OK] and then selecting "Yes".

✓INFORMATION

- Some i-appli may have different display area, screen mode may not be changed by rotating the display.
- i-appli that vertical and horizontal (or vice versa) size is less than 432x240 dots are displayed with horizontal and vertical size doubled.
- On a full-screen or wide display giving 864 vertical or horizontal dots, each pressing of side key [▲] switches displaying and hiding the battery icon.
- The volume of sound emitted during i-appli operation can be adjusted. Note that some i-appli have no sound.→P88, 216
- Images used on i-appli (shot using the camera from i-appli, obtained using the i-appli infrared communication function) or the data you entered may be sent to the server via Internet.
- Partially saved i-appli is allowed displaying software description, deletion and folder change.
- i-appli that uses microSD memory card can save data in it. Data saved in microSD memory card may not be available for other models. i-appli that uses microSD memory card can be viewed with "i-appli data".→P299

- i-øppli may be interrupted when any of the conditions below occur. Upon completion of the current operation, i-øppli restarts; selecting "i-øppli" after pressing **[MULTI]** allows to restart i-øppli while continuing the current operation (except for the ones marked with *). Some i-øppli may not return to the state of interruption.
 - When a voice call comes in
 - When a videophone call comes in*
 - When Lock on close is activated*
 - When the function is switched over to another function
- When you are out of service area or the saved data cannot be used, i-øppli may not start or not operate correctly.
- For certain i-øppli, the IP (Information Provider) may access i-øppli saved in the mobile phone and directly set operation disabled state. In such a case, i-øppli startup, stand-by display settings, upgrading, etc. are disabled, enabling only deletion and software description display. To resume using i-øppli, notification of i-øppli enabled must be received; contact the IP (Information Provider).
- For certain i-øppli, the IP (Information Provider) may send data to i-øppli saved in the mobile phone.

◆ Displaying history when operation finishes without using saved data <Security error hist.>

When i-øppli ended with an error because i-øppli cannot use the saved data, the name of the i-øppli, date and time, and cause of security error are recorded.

- Up to 20 items can be recorded. When exceeding the limit, record is overwritten chronologically.

1 **[MENU]** ▶ **[i-øppli]** ▶ **[3]** **[3]**

- To delete histories, press **[OK]** and select "Yes".

◆ Displaying i-øppli Description <Software description>

1 **[Q](1 sec. or more)** ▶ **Select a folder** ▶ **Place the cursor on the i-øppli and** **[OK]**

- Displayed items differ depending on i-øppli.
- To check the site certificate of the i-øppli downloaded from SSL page, press **[OK]** on the Software description screen.

◆ Setting operating condition of i-øppli <Software settings>

1 **[Q](1 sec. or more)** ▶ **Select a folder** ▶ **Place the cursor on the i-øppli and** **[MENU]** ▶ **[6]** ▶ **Set the required items** ▶ **[OK]**

✓INFORMATION

- If you set "No" for Set NW transmission, the i-øppli may not be started and timely information such as stock prices or weather forecast may not be provided by i-øppli.
- If you set "Yes" for Use icons, since icons for unread messages, remaining battery level, Silent mode, and antenna icon may be sent to IPs (Information Providers) through the Internet, it may give the information to a third party. Some i-øppli requiring icons may not operate when "No" is set.

◆ Setting operations while i-øppli is active

◆ Setting Display light

1 **[MENU]** ▶ **[i-øppli]** ▶ **[2]** **[4]** ▶ **[1]** or **[2]**

Terminal Setting : The light is turned ON according to Display light of Display.

Software : The light is turned ON according to the i-øppli.

◆ Setting vibrator

Set if you allow the vibrator operation by i-αppli.

1 **ME** ▶ [i-αppli] ▶ **2** **5** ▶ **1** or **2**

◆ Setting power saving

Set brightness of the display, key lighting and volume.

<Example> Presetting

1 **ME** ▶ [i-αppli] ▶ **2** **7**

2 **1** ▶ **1** or **2**

- "Power saved mode" sets the brightness to "Brightness 1", Key lighting to "OFF" and Effect sound volume to "Level 1" (not changed if set to "Silent"). For "Default mode", this function resets each setting to default state.

Changing brightness : **2** ▶ **1**-**6**

Changing Key lighting : **3** ▶ **1** or **2**

Changing volume : **4** ▶ Side key [▲▼] or **⊗** ▶ **⊙**

◆ Starting another i-αppli from i-αppli

Some i-αppli can start specified i-αppli and allow to enjoy i-αppli without returning to the Software list.

1 Start another i-αppli from i-αppli

◆ Motion tracking

This terminal is compatible with feeling games, and operations can be performed by tilting or shaking the terminal.

- While playing the game, do not cover In-camera with your hand, etc. Tilt, etc., may not be detected.

◆ Using preinstalled i-αppli

(TBD)

Starting i-αppli quickly

i-αppli can be started by a simple operation from the stand-by display.

◆ Setting i-αppli to one-key/two-key shortcut

- You can register one item of one-key shortcut.
- You can register one item of two-key shortcut for each key of keypad, up to 10 items in total.

<Example> Setting two-key shortcut

1 **Q** (1 sec. or more) ▶ Select a folder

2 Place the cursor on the i-αppli and **ME** ▶ **8** **2**

Setting i-αppli shortcut : Place the cursor on the i-αppli to set and **ME** ▶ **8** **1**

- Same operations are required also for canceling.

3 Select a destination to save.

- Icon numbers (**0**-**9**) correspond to keypads (**0**-**9**) used to activate two-key shortcut.
- When a destination already set is selected, overwriting confirmation screen appears.

◆ Starting i-αppli using one-key/two-key shortcut

<Example> Starting i-αppli using two-key shortcut

1 **0**-**9** ▶ **Q** (1 sec. or more)

Starting i-αppli using one-key shortcut : **⊙** (1 sec. or more)

Automatically starting i-αppli

◆ Specifying whether to start automatically <Auto start>

Set all i-αppli, which are set to "ON" for User in Set auto start info., at once to start automatically.

1 **ME** ▶ [i-αppli] ▶ **2** **2** ▶ **1** or **2**

◆ Setting date and time of Auto start <Set auto start info.>

1 **Q** (1 sec. or more) ▶ Select a folder ▶ Place the cursor on the i-αppli to set and **ME** ▶ **5** ▶ Set the required items ▶ **Q**

User : Select if you perform Auto start with the conditions below.

Time : Enter the time to automatically start the i- α pli.

Repeat : Set the condition for repetitive Auto start of the i- α pli.

Weekly : Set the day of the week for Auto start when "Weekly" is set for Repeat.

Date : Set the date for Auto start when "Onetime" is set for Repeat.

Software : Specify if you automatically start at the intervals preset for the i- α pli.

i- α pli 1-4 : Depending on i- α pliDX, up to 4 conditions of Auto start can be set while it is running. Specify if you enable those settings.

✓INFORMATION


- Even with Auto start set, automatic activation does not occur in the cases below, causing α_x to appear on the stand-by display and to be recorded in Start failure hist.
 - When the screen except the stand-by display appears
 - UIM operation restriction is set (except for preinstalled i- α pli)
 - When UIM cannot be detected
 - When the interval of Auto start is too short
 - When All lock, Personal data lock or Privacy mode is ON (when i- α pli is "Authorized access")
 - When the i- α pli usage is stopped by IP (Information Provider)
- Even if you change "Repeat" of multiple i- α pli to set them start automatically at the same time, only one of them can be activated at one time. The information of the i- α pli that failed to be activated is recorded in Auto start failure log, however, α_x does not appear on the stand-by display.

◆ Displaying history when Auto start of i- α pli fails <Start failure hist.>

When Auto start of the i- α pli fails, α_x appears on the stand-by display and the name of the i- α pli, date and time, and causes are recorded.

- Up to 20 items can be recorded. When exceeding the limit, record is overwritten chronologically.
- When displaying Start failure hist. or when the next Auto start is successful, α_x on the stand-by display disappears.

1 [i- α pli] ▶ 3 1

- To delete histories, press  and select "Yes".

i- α pli To

Starting i- α pli from site or mail

- #### 1
- Select a link item enabling to start i- α pli of the site or i-mode mail ▶ "Yes"



✓INFORMATION

- i- α pli not saved in the terminal cannot be started with i- α pli To. Some i- α pli can be started immediately after being downloaded from a site, without saving.
- Partially saved i- α pli cannot be started from mail with i- α pli To.
- For i- α pli starting just after downloading from sites, communication confirmation screen while they are activated may appear.
- Some i- α pli program may not be saved in the terminal.
- If the i- α pli is set not to start with i- α pli To, the i- α pli cannot be started. A@P215


i- α pli stand-by display

Operating i- α pli stand-by display

When the i- α pli is set for the stand-by display, you can start the i- α pli from the stand-by display to operate.

- While displaying i-oppai stand-by display,  or  appears on the top of the display in gray.
- Setting i-oppai stand-by display → P94, 215


◆ Starting i-oppai of i-oppai stand-by display

- 1 **On the i-oppai stand-by display,**
 ▶ **Operate the i-oppai**

✓INFORMATION

- When the terminal is turned ON while setting the i-oppai stand-by display, activating confirmation screen of the i-oppai stand-by display appears. The display starts when "Yes" is selected or no operations are performed for approximately 5 seconds. Selecting "No" cancels i-oppai stand-by display. Note that when the power is turned ON by Auto power ON, the i-oppai stand-by display automatically appears, without displaying the confirmation screen.
- When setting i-oppai that performs communication, to i-oppai stand-by display, it may not operate correctly depending on conditions such as signal quality.
- When an error that cancels the i-oppai stand-by display occurs, canceling confirmation screen for the i-oppai stand-by display appears. If you select "Yes", it is canceled and recorded in Abnormal exit hist.

◆ Quitting i-oppai and returning to the i-oppai stand-by display


- 1 **While running i-oppai,**  ▶ **"End"**

◆ Displaying exit history of i-oppai stand-by display <Abnormal exit hist.>

When an error that cancels i-oppai stand-by display occurs, the name of the i-oppai, date and time can be recorded.

- Up to 20 items can be recorded. When exceeding the limit, record is overwritten chronologically.

- 1  ▶ **[i-oppai]** ▶  




- To delete histories, press  and select "Yes".

Managing i-oppai

Various functions such as i-oppai upgrade, creating folder and deleting unnecessary i-oppai for easier use of i-oppai are available.

◆ Upgrading i-oppai <Upgrade>

When the i-oppai is updated, upgrade is available.

- 1  (1 sec. or more) ▶ **Select a folder ▶ Place the cursor on the i-oppai and**
 ▶  ▶ **"Yes"**

✓INFORMATION

- When upgrading i-oppai, data such as game scores stored in i-oppai may be erased.
- Some i-oppai may inquire the server about the availability depending on the length of time of use and number of times of use. If the server gives a notice of the i-oppai having been updated, it can be upgraded after confirming if you upgrade it.
- Some i-oppai is automatically upgraded.

◆ **Creating/deleting folders**

◆ **Creating folders**

- Up to 20 items can be registered.

1 **Q** (1 sec. or more)

2 **ME** ▶ **4**

Changing folder setting : Place the cursor on the folder and **ME** ▶ **1**

Changing the order of the folder : Place the cursor on the folder and **ME** ▶ **5** or **6**

3 Enter a folder name ▶ **OK**

◆ **Deleting folders**

- Preinstalled folders cannot be deleted.

1 **Q** (1 sec. or more) ▶ Place the cursor on the folder and **ME** ▶ **2** **1**

- When i-ϕpli is contained in the folder, perform authentication.

2 "Yes"

◆ **Moving i-ϕpli to another folder**

<Example> Moving 1 item

1 **Q** (1 sec. or more) ▶ Select a folder

2 Place the cursor on the i-ϕpli and **ME** ▶ **3** **1**

Moving selected i-ϕpli : **ME** ▶ **3** **2** ▶ Select an i-ϕpli ▶ **OK**

Moving all i-ϕpli in the folder : **ME** ▶ **3** **3**

3 Select a folder to move to ▶ "Yes"

◆ **Deleting i-ϕpli**

<Example> Deleting 1 item

1 **Q** (1 sec. or more) ▶ Select a folder

2 Place the cursor on the i-ϕpli and **ME** ▶ **2** **1**

Moving selected i-ϕpli : **ME** ▶ **2** **2** ▶ Select an i-ϕpli ▶ **OK**

Deleting all i-ϕpli in the folder : **ME** ▶ **2** **3** ▶ Authenticate

3 "Yes"

◆ **Sorting i-ϕpli <Sort software>**

1 **ME** ▶ [i-ϕpli] ▶ **2** **1** ▶ **1** - **5**

◆ **Checking number of i-ϕpli in folder <Software in folder>**

1 **Q** (1 sec. or more) ▶ Place the cursor on the folder and **OK**

Icon definitions → P213 Step 3 in "Starting i-ϕpli"

◆ **Checking current settings of i-ϕpli <Software information>**

The settings such as saved number of i-ϕpli or i-ϕpli stand-by display can be checked.








1 **Q** (1 sec. or more) ▶ **OK**








Software count : Total number of i-ϕpli saved is displayed.








i-ϕpli display : Name and destination folder to save of i-ϕpli set as i-ϕpli stand-by display are displayed.








One-key shortcut : Name and destination folder to save of i-ϕpli registered for one-key shortcut are displayed.

Auto start : Name of i-ϕpli, name of destination folder to save i-ϕpli and start time of i-ϕpli set for the next Auto start are displayed.

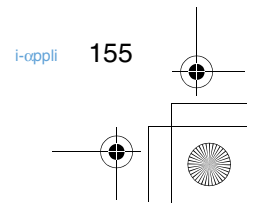



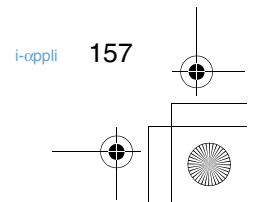



Full Browser

Full Browser

Viewing websites for PCs

MENU [i-mode] 7

You can connect to Internet to view websites created for PCs.

Framed, CSS and SSL/TLS supporting websites can also be viewed.

- Communications of large-size data such as viewing websites containing many images and downloading require high charges.

When you connect to the full browser for the first time, a warning message will be displayed.

If you select "YES" the message will not be displayed for subsequent connections.

- Full Browser supports the functions and technologies below :

Frame : A frame for dividing a web page or a website configured with frames. A website with some frame configurations may not be fully displayed.

Cookie : A function that saves website-specified information such as the date and time the website appears and the number of the times it is visited in the terminal. Based on such information, various functions on the website can be easily used.

CSS : A standard that defines the layout of web pages.

JavaScript : A language for creating websites.

Referer : URL information of a website from which a link is selected to move to a website specified in it.

SSL/TLS : A technology for securing safe data communications with authentication/encryption. A website that supports SSL/TLS has URL beginning with https://. In some cases, it is used in a part of a website.

<Example> Connecting to website at specified address (URL)

1 ▶

2 ▶ Enter a URL ▶

- In alphabet input mode, repeatedly press to enter ".", "/", "-", etc. and to enter "@imode.net.tw", ".com", ".com.tw", ".net.tw", ".edu.tw", ".org.tw", ".gov.tw", "http://www.", "https://www.", "www.", ".asp", ".html", ".htm" or ".php".
- When "No" is set in Access setting such as by default, the Access setting screen appears. →P275
- From the second time, the URL previously connected appears.
- Press or to stop connecting or to stop connecting with multiple windows.

Connecting to Home :

Setting URL for Home connection →P274

Displaying from bookmark : ▶ Select a folder ▶ Select a bookmark to display

Connecting from Entry URL log :

▶ Select a URL ▶


Connecting to Browser history : ▶ Select a URL ▶

3 After reading a website, ▶ "Yes"


✓INFORMATION

- The functions below are not supported :
 - Displaying Flash graphics
 - Playing sound
 - Plug-in
 - Saving screen memos
 - Phone To (AV Phone To), SMS To, Media To
- Some websites may take extra time to be displayed or not be displayed correctly.
- When displaying a site including an image, the icons below may appear instead of the image :
 - : When Image is set to "Not display" in Image display
 - : When the image data is invalid or the image cannot be found, or when the image cannot be received because the terminal goes out of service area during reception
 - : When the image cannot be displayed for an incorrect URL, etc.

◆ Viewing screen of Full Browser

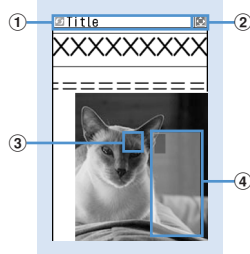

Full Browser screen (Vertical display)

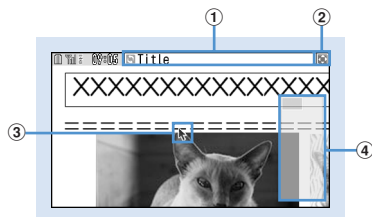

Full Browser screen (Horizontal display)

- ① Status display/Title or URL
 - (Light blue) : Acquiring
 - : In thumbnail display of framed website →P272
 - : In frame enlarged display →P272
 - (Dark blue) : Acquiring another frame during enlarged display of current frame
 - : Downloading Word, Excel or PowerPoint files
- ② : Display mode (PC mode (full scale)/Mobile mode) →P274
 - : In Window Open Guard →P274
- ③ Pointer →P272
- ④ Section map

The current position relative to the whole display appears temporarily at connection or scrolling screen (except in thumbnail display). The size of section map of PC mode may change during downloading the page or vary by websites.

◆ Key operations on Full Browser screen

- [1]-[4]**, **[6]-[9]** : Scrolling
 - Depending on the display mode, keys available for scrolling differ. →P274
- [E]**, **[M]** : Displaying previous/next pages
 - The operation is enabled only in PC mode with the pointer hidden.
- [0]** : Searching →P273
- [5]** : Switching zooming factor
 - Settings of zooming in/out remain after exiting Full Browser.
- [F]** : Switching pointer display/hide →P272

- [<=>]** : In the horizontal display, switching displays with/without the guide area
 - When "Full screen view" is selected in Screen view setting, pressing **[<=>]** on the vertical display to switch the guide area. →P275

Switching display modes : **[4]**
 Display mode setting →P274

Displaying key operation list : **[8]**

Connecting to Home : **[1]**

Adding the displayed website as bookmark :
[2] **[1]** ▶ Select a folder to add to
 Recording bookmark →P153

Displaying from bookmark : **[2]** **[2]** ▶ Select a folder
 Displaying from bookmark →P153

Connecting by specifying URL : **[3]** **[1]** ▶ Enter the URL ▶

Connecting from Entry URL log :
[3] **[2]** ▶ Select a URL ▶

Connecting to Browser history :
[3] **[3]** ▶ Select a URL ▶

Reloading information : **[4]**

Creating message with the URL of the displayed website pasted in the message text : **[6]**

Viewing information : **[8]** **[1]** - **[3]**
 Certificate →P163

Setting image display : **[8]** **[4]**
 Image display →P275

Switching character encode : **[8]** **[5]** **[1]**
 • Each pressing of **[8]** **[5]** **[1]** causes to change character encode as SJIS →EUC →JIS →UTF8. Press **[8]** **[5]** **[2]** to switch to "Auto switch".

Playing animation from the beginning : **[8]** **[6]**

Making Window open guard valid/invalid :
[8] **[7]** ▶ "Yes"
 Script setting →P274

Checking section map : **[8]** **[8]**

Setting color or display of section map :
[8] **[9]** ▶ **[1]** - **[4]**

✓INFORMATION


- When you change the zooming factor while displaying multiple websites with Multi window, the change applies only to the currently active window.
- Operations for selecting link destinations and items are the same as those for i-mode. →P150

◆ Switching display of pointer

While displaying the pointer, you can move on a screen by operating the pointer with . Hold down to move quickly.

- Settings of displaying/hiding the pointer remain after exiting Full Browser.

1 On the Full Browser screen, .

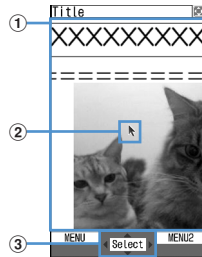

① Moving range

The pointer can be moved in this range. On some frames, the range the pointer can move may be limited.

② Pointer

When moving near the end of the window, the screen scrolls.

③ Displayed when the item can be selected by the pointer.

- You can switch displaying/hiding the pointer each time you press .

◆ Switching to drag mode for operation

You can switch to drag mode during pointer display to operate contents available in drag mode.

- Operations available in drag mode vary by contents.

1 Move pointer onto contents (1 sec. or more)

Pointer changes from to , and you can operate contents with .

- Press and hold (1 sec. or more) again to return to pointer display.


◆ Displaying a framed website

When a framed website appears, a thumbnail screen appears allowing to view the entire configuration. Individual frames can be enlarged for viewing.

- During thumbnail display, the operations and settings below are disabled :
 - Scrolling screen
 - Search
 - Save image, Word, Excel or PowerPoint files
 - Link display
 - Section map check/setting

1 On the Full Browser screen containing frames, select a frame to be enlarged.

- Use to move to the frame. In PC mode, also can be used to move to the frame.
- While displaying the pointer, you can select the frame to enlarge by operating the pointer with .

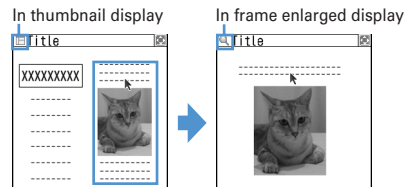


- Press to return to the thumbnail screen.

◆ Displaying multiple websites <Multi window>

You can view a website selected from a maximum of 5 websites displayed.

<Example> Displaying a website link on a new window

1 On the Full Browser screen, place the cursor on the link and

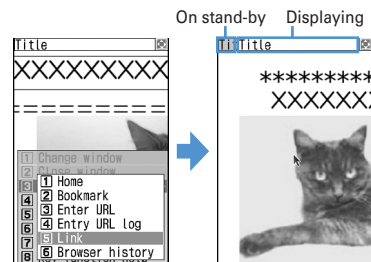

- Press side keys to switch a window. A window to switch to can be selected from a window list by pressing and holding side keys for 1 second or more or pressing .
- To close the current window, press and select "Yes".

◆ Searching for a character string displayed on website

1 On the Full Browser screen, **[O]** ▶ Enter characters in the search field ▶ **[Q]**

The set character string is searched for and character strings matching the entered string are highlighted.

- Press **[E]** to move to the previous option and **[D]** to move to the next option (matched string).
- Press **[A]** to end searching.

Setting search method : On the Full Browser screen,

[O] ▶ **[ME]** ▶ Set the required items ▶ **[A]**

Search method : Select "Partial match" or "Exact match" for Search method.

Case-sensitive : Select if you make case-sensitive search.

◆ Uploading images

You can upload images in GIF or JPEG format saved in the terminal to a website.

- The maximum allowable size of an image file uploaded is 80 Kbytes and the total size of images and character strings, if contained, is limited to 100 Kbytes.

1 On the Full Browser screen, "Browse".

- "Browse" button appears when the terminal can upload images. It appears as a different mark when the same website appears on a PC, etc.

2 Select a folder ▶ Select an image to upload

- When microSD memory card has been inserted, select "Phone memory" or "microSD".
- When editing or canceling the selected image, select "Browse" button again and select "Change" or "Cancel".

✓INFORMATION

- Procedures for uploading vary by websites.
- You cannot upload images inhibited to output from the terminal or data except images or character strings.

◆ Downloading images

You can save images in GIF, JPEG, PNG or BMP format displayed on websites.

- The maximum size of an image file that can be saved is 500 Kbytes.
- PNG and BMP format images can be saved in "Other" folder of microSD memory card, but cannot be displayed.

1 On the Full Browser screen

[ME] ▶ **[5]** ▶ Select an image to be saved

The next procedure →P157 Step 2 and the following steps in "Downloading images"

- When placing the cursor on the image to save, the image is surrounded by frames and the title and the file size are displayed.

✓INFORMATION

- Background images cannot be downloaded.
- Images with horizontal and vertical (or vice versa) sizes larger than 864×480 in GIF format or 1,728×2,304 in JPEG format cannot be saved in the terminal. Some images cannot be saved depending on the JPEG type.
- Even a file of an allowable file type and size may not be saved from some websites.
- When exceeding maximum number of saved items/maximum area →P306

◆ Downloading Word, Excel or PowerPoint files

You can save Word, Excel and PowerPoint files displayed on websites.

- The maximum size of data file that can be saved is 500 Kbytes.
- Word, Excel or PowerPoint files can be downloaded only when microSD memory card is inserted.
- File of Word 2007, Excel 2007 or PowerPoint 2007 cannot be downloaded.

1 On the Full Browser screen, select data to download.


- You can stop downloading by pressing **[D]** or **[ME]** **[9]** and selecting "Yes". You can stop downloading all data with multiple windows by pressing **[ME]** **[8]**.

2 "Save"

Displaying : "Preview"

Canceling saving : "Back" ▶ "No"

3 Enter a display name

- When ".
- Word, Excel or PowerPoint files are saved in a folder of Other in the terminal or "Other" folder in microSD memory card. If Other in the terminal has multiple folders, a screen appears asking to select a saving folder. The files are saved to a selected folder.

✓INFORMATION

- Downloading stops when the downloaded data size exceeds 500 Kbytes during downloading.
- When exceeding maximum number of saved items/maximum area→P306

Setting for Full Browser


You can set various functions for Full Browser.

◆ Setting URL for Home connection <Home URL>

MENU [i-mode] 751

1 ▶ ▶ Enter the URL

✓INFORMATION

- To register the website while displaying on the Full Browser screen, press  and select "Set as home URL"→"Yes".

◆ Making cookie settings <Cookie set/delete>

MENU [i-mode] 752

When Cookie is Valid, you can easily use functions of websites displayed previously.

- Some websites or contents services may not be correctly displayed or used unless Cookie is Valid.
- When Cookie is Valid, information such as the date and time the website is displayed and the number of times it is visited are transmitted. DoCoMo assumes no responsibility liable if your information is known to third parties by Cookie setting.

1 ▶

2 Select the Cookie field ▶ -

- When "Valid(notify)" is selected, select the Notify field and then select the timing to notify of information sending/receiving from "Sending", "Receiving" or "Sending/receiving".

Deleting all Cookie data :

 ▶ Authenticate ▶ "Yes"

3

✓INFORMATION

- When UIM is replaced with another one, Cookie is set to "Invalid". If "Valid" or "Valid(notify)" is set at this time, a confirmation screen appears asking if you delete Cookie if Cookie data saved in the terminal after authentication.

◆ Making Script settings <Script setting>

MENU [i-mode] 753

You can set if you validate operation of a website containing JavaScript.

- Some websites may not be correctly displayed unless Script Setting is "Valid".

1 ▶ ▶ Select Script setting field ▶ -

- When "Valid(NotConfirm)" or "Valid (ConfirmAlways)" is selected, select the Window Open Guard field and select "Valid" or "Invalid".
With "Invalid" set for Window Open Guard, a message appears asking if you open a new window as specified by JavaScript. With "Valid" set, no new windows open even if specified by JavaScript.

2

- When "Valid(Not confirm)" is already selected, a confirmation screen for registration appears.

◆ Selecting display mode <Display mode setting>

MENU [i-mode] 754

You can set if you display a screen with the PC screen size (PC mode(full scale)) or aligned with the lateral display size of the terminal (Mobile mode).

1 ▶ ▶ or

✓INFORMATION


- While displaying multiple websites with multi window, the display mode is changed for all websites.
- When the pointer is hidden in Mobile mode, press to display previous/next pages.

❖ Scrolling screen


Scrolling in modes is as shown below.

- Press any key except to scroll the page by screen.
- Hold down the key to scroll continuously.

■ PC mode(full scale)

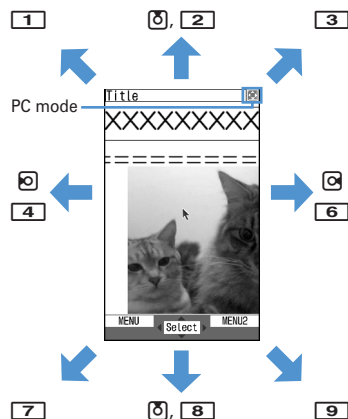

■ Mobile mode

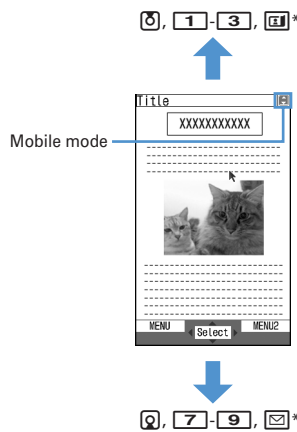

* Only for hiding the pointer.

◆ Setting whether to display image and animation <Image display>

MENU [i-mode] 756

- 1 ▶ ▶ Set the required items ▶

Image : Set if you display images.

- When "Not display" is set, appears instead of the image or animation.

Animation : Set if you display animation.

- When "Not display" is set, the first image of the animation appears.

◆ Setting whether to use Full Browser <Access setting>

MENU [i-mode] 756

- When setting "Yes", check the notice.

- 1 ▶ ▶ "Yes" or "No"

◆ Setting whether to send Referer <Referer setting>

MENU [i-mode] 757

- DoCoMo assumes no responsibility if your information is known to third parties by sending Referer.


- 1 ▶ ▶ 1-3

◆ Setting whether to display full screen <Screen view setting>

MENU [i-mode] 758

Specify whether to activate full-screen display in vertical display.

- 1 ▶ ▶ 1 or 2

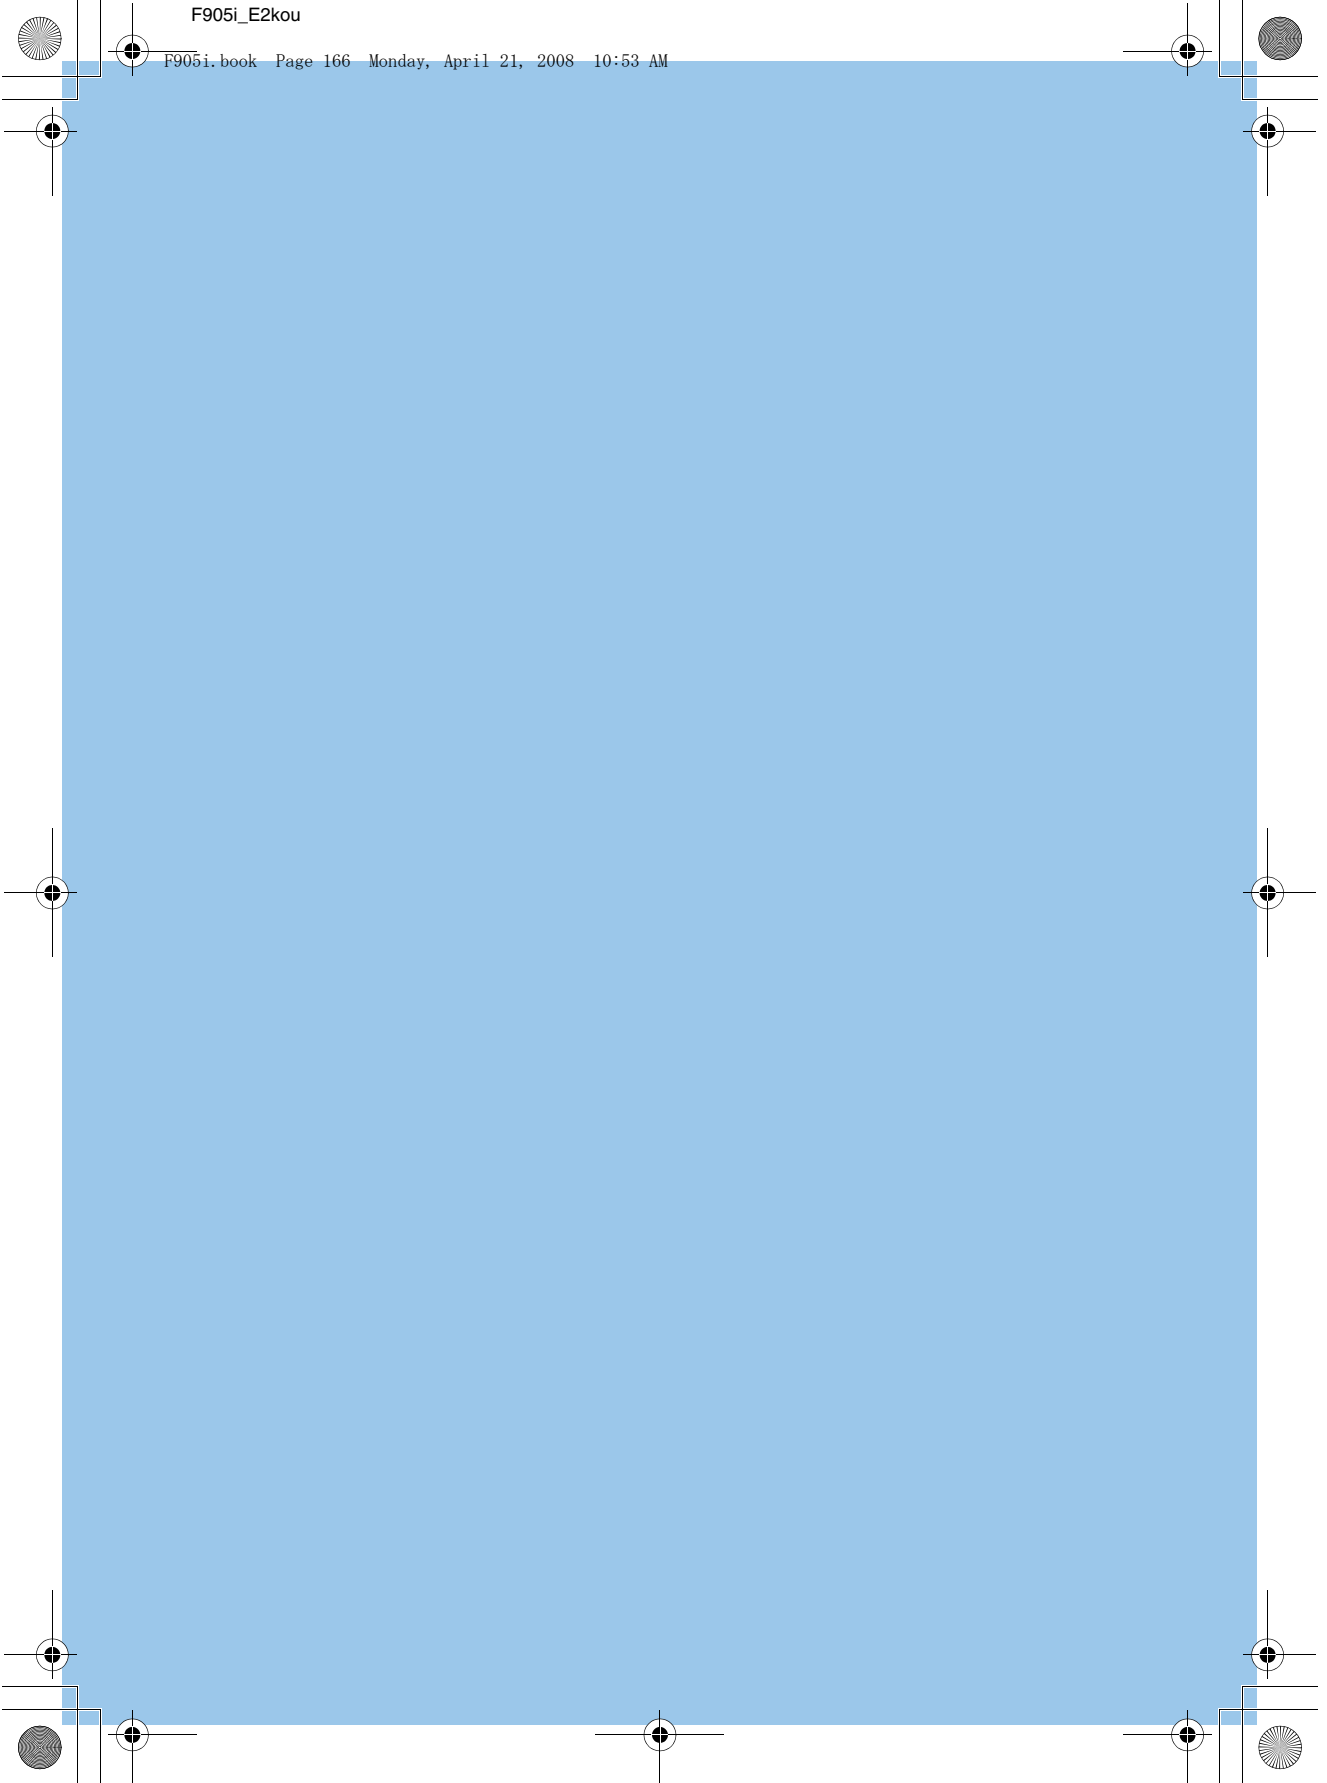

Data Display/Edit/Management