


GG Telecom

**R1.** BluetoothHandsfreeKit  
**User Guide**



VOICE



GG Telecom

Bluetooth® FCC CE MADE IN TAIWAN

ALSO KNOW AS < R1 / RX-1 / RX-7 / GX-7 / MZ-1 / MX-5 / TX-5 / TX-7 >

Welcome

Thank you for purchasing the R1 Bluetooth Handsfree Kit. This guide contains instructions for setting up and using the new Handsfree kit. Please refer to the Safety Information in this booklet for important product safety information prior to the use of the product.

Getting Assistance

The GG Telecom Assistance Center is ready to assist you. You can find answers to frequently asked questions, ask a question using email, receive service over the Internet, or speak directly with a representative.

Email :sales@ggtelecom2002.com

# R1.

BluetoothHandsfreeKit

The iVOICE R1 Handsfree Kit is a revolutionary Bluetooth hands-free speakerphone for your car, home or office. Leveraging innovations in our noise, echo and wind noise cancellation technologies found in iVOICE Bluetooth Handsfree Kit, the R1 pairs seamlessly to your Bluetooth enabled phone to transform any environment into a communication hub.

Designed with the mobile users in mind, the R1 sports a small form factor design for greater mobility and convenience. Integrated dual microphones and our Microphone Space Isolation Technology helps ensure your communications are delivered as you intended: clear. With pairing capabilities for up to (8) phones, the R1 leads the industry in multi-pairing technology. Screen and answer all your calls with iVOICE Intelligent Voice Operator™ and hear the number of the caller announced.

Do not operate your Handsfree Kit while driving!!

ALSO KNOW AS < R1 / RX-1 / RX-7 / GX-7 / MZ-1 / MX-5 / TX-5 / TX-7 >

# What is iVOICE<sup>®</sup> technology???

## Introducing the iVOICE<sup>®</sup> technology.

### Intelligent Voice Operator™

- Announces the ID of the caller when the phone rings.
- Announces "HELLO" when you on the headset.
- Announces "GOODBYE" when you turn off the headset.
- Announces "PAIRING SUCCESSFUL".
- Announces "PAIRING CODE 0000" (available in 9 different language ).



### iVOICE SMARTPAIR™ Technology

Your Handsfree Kit incorporates iVOICE SMARTPAIR™ Technology to simplify the Bluetooth setup process .You do not have to key in the pincode. All you have to do is use your Bluetooth device to SEARCH → SELECT → and device will be paired successfully.


**Note :** Your mobile phone must support Bluetooth Version 2.1 secure simple pairing.

### iVOICE AUTOPAIR™ Technology

Your Handsfree Kit incorporates iVOICE AUTOPAIR™ Technology to simplify the Bluetooth setup process.

# R1. Bluetooth Handsfree Kit

Product Overview

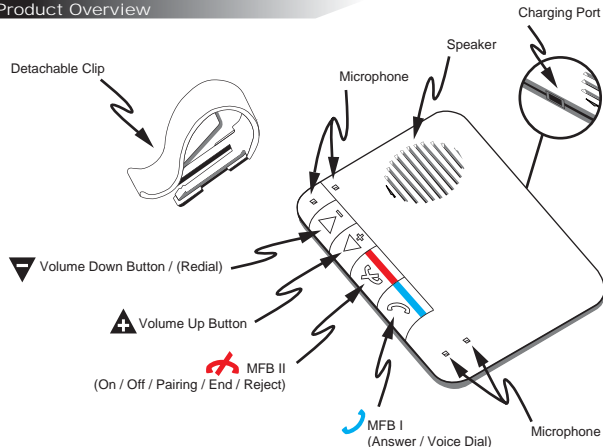

30hr.	800hr.	v2.1+EDR			
Talk Time 30 Hours	Standby Time 800 Hours	Bluetooth V2.1+EDR	Echo & Noise Reduction	Multipoint	Pair Up To 8 Bluetooth Devices
x2					
Dual Mic	Dual Mode	Battery Indicator	On/Off LED	USB Charge	

## Using It In The Car.



Attach the clip to Handsfree Kit.



The Handsfree Kit must be placed in such a way that its buttons are facing the driver.

## Using It As A Portable Speakerphone.



You can detach the clip and place it in your shirt pocket.



Use it as a speakerphone and place it in your shirt pocket during a conference call.

## Pairing

Before you use the Handsfree Kit for the first time, charge with the supplied charger for 6 hours or until the Red light diminish.

Before you can use your Handsfree Kit, you must "pair" it with the device you wish to use.

### First Time Pairing / AUTOPAIR™ Technology

The first time you turn on your Handsfree Kit, it automatically enters pairing mode for 2 minutes. Once paired successfully, your Handsfree Kit stays on for instant use.




1. Press the MFB II until you hear Handsfree Kit announces "HELLO".
2. Handsfree Kit will automatically go into pairing mode". Blue and Red light will flash alternately. You will hear the voice prompt announce "PAIRING CODE 0000".

3-1. Turn on the Bluetooth function of your phone.



3-2. Perform a "Bluetooth device discovery" from your phone.

3-3. Select your Handsfree Kit from the list of discovered device.



# R1. Bluetooth Handsfree Kit



3-4. Enter the Pincode/ Passkey "0000".

4. Once pairing is successful, Handsfree Kit will voice prompt "Pairing Successful".

**Note :** After pairing, some devices will automatically connect to your Handsfree Kit, and some will not. You can manually select connection from your mobile phone.

## Initial Test

Your Handsfree Kit and your device should now be paired and connected, ready to make and receive calls. To confirm they are successfully paired and operating properly please try the following.

1. On your phone's keypad, dial a contact you wish to call.
2. Press **Send** on your phone to initial the call.  
The call will be heard on the Handsfree Kit.

If the Handsfree Kit does not enter into pairing mode automatically it could already be paired with another phone and you have to perform a master reset. The Handsfree Kit can only be paired with one phone at a time. After you have paired the Handsfree Kit with the phone, it will automatically connect to the phone as soon as it is turned on and within range.

## Features

### Turn On / Turn Off




Press the MFB II until Handsfree Kit voice prompt "Hello" or "Goodbye".

### Answer / End A Phone Call




Press the MFB I to answer incoming calls.  
Press the MFB II to end or reject a call.

### Audio Transfer




If you want to transfer your call to your mobile phone while speaking on the Handsfree Kit, tab on the MFB I and you can continue your conversation on the mobile phone.

### Mute The Microphone




When Handsfree Kit is in talking mode, press the Volume Up Button and the Volume Down Button together once to mute the mic, press together once again to unmute.

### Redial A Call




Long press the Volume down button when your Handsfree Kit is connected to your Bluetooth mobile phone.

### Increase / Decrease Volume




Press the Volume Up Button / the Volume Down Button repeatedly to increase or decrease volume.

### Voice Dial



1. Press the MFB I when Handsfree kit is connected to the phone.
2. Say the name of the person that you wish to call after the "beep".


### Reset The Device



During standby mode, (Blue light blinking 1 time every 4 seconds), press all four buttons.

Resetting the device means that all the previously paired mobile phones will be erased.

### Indicate The Battery Status



Short press the Volume Up Button and the Volume Down Button at the same time when your headset is in standby mode.

- Red light flashes 5 time indicates that the battery is full. x 5
- Red light flashes 4 time indicates that the battery is 80% full. x 4
- Red light flashes 3 time indicates that the battery is 60% full. x 3
- Red light flashes 2 time indicates that the battery is 40% full. x 2
- Red light flashes 1 time indicates that the battery is 20% full. x 1

### What is IsolationMode™ ??



Each time you pick up a call, your Handsfree Kit is in IsolationMode™.

IsolationMode™ is suitable for one person usage. During IsolationMode™, sensitivity of microphone is redirected to participant within a 90 degree angle. Voice outside the 90 degree angle will not be transmitted over the other end.

# R1. Bluetooth Handsfree Kit

## What is Mobile Conferencing™ ??



Mobile Conferencing™ is suitable for open communication by all participants in the room. During Mobile Conferencing™, the 2 built in microphone provide 360 coverage for a 15' x 15' room. Therefore, everyone voice will be pick up and transmitted over the other end. And you can enjoy quality phone call without worrying about echo noises at the background.


Press the MFB I and the MFB II at the same time during a phone conversation to enter Mobile Conferencing™ mode.

## Multipoint Technology

The Handsfree Kit supports Multipoint Technology which allows you to use it simultaneously with two different Bluetooth mobile phones.


### How To Go Into Standby Mode??

Drop the Bluetooth connection from your connected devices by pressing the MFB II and the Volume Down Button at the same time.




### Put Handsfree Kit In Pairing Mode

Put Handsfree Kit in pairing mode to pair with your additional Bluetooth devices.



**Method 1**  
During standby mode, (Blue light blinking 1 time every 4 seconds) long press the Volume Up Button until the Red and Blue light flash alternately.



**Method 2**  
When your Handsfree Kit is not turn on, long press the MFB II until the Red and Blue light alternate.

### How To Connect To Two Mobile Phone Simultaneously??

1. Turn the Handsfree Kit off and turn it on, the Handsfree Kit will connect to both of your mobile phones automatically.
2. Establish the Bluetooth connection via your mobile phone. Please refer to your mobile phone user manual to connect your device.

### How to Answer a Second Call While Talking On The Phone??



1. Short pree the MFB I to hold the first call and switch to the second call from the other phone.

**Note 1 :** If you choose not to answer the second call, and you have voice mail on the second phone, the call will go to voice mail.



2. Long press the MFB I to hang up the first call and switch to the second call from the other phone.

**Note 2 :** Not all Bluetooth mobile phone support Multipoint Technology. Interoperability between the Handsfree Kit and all Bluetooth enabled products is not guaranteed.

## LED Indicator Chart

Status	LED Indication	
<b>Power on</b>		Blue indicator blinks twice
<b>Power off</b>		Red indicator blinks twice
<b>Pairing mode</b>		Red & Blue indicators blink by turns
<b>Reset</b>		Red & Blue indicators blink twice
<b>Standby mode</b>		Blue indicator blinks once every 4 seconds
<b>Connected mode</b>		Blue indicator blinks rapidly 2 times every 4 seconds
<b>Talking /IsolationMode™</b>		Blue indicator blinks rapidly 3 times every 4 seconds
<b>MobileConferencing™ mode</b>		Blue indicator blinks rapidly 3 times every 4 seconds and Green indicator steady on
<b>Outgoing call</b>		Blue indicator blinks once every second
<b>Incoming call</b>		Red & Blue indicators blink once every second
<b>Charging</b>		Red indicator steady on
<b>Charging complete</b>		Red indicator off
<b>Low Battery</b>		All Blue indication will change to Red

**Note :** "Standby Mode" means Handsfree Kit is on but not connected to any device. "Connected Mode" means Handsfree Kit is connected to device but not on a call.

Function	Button
Power on / Power off	<b>press and hold</b> (about 3 seconds)
Pair	<ol style="list-style-type: none"> <li> <b>long press</b> when power off</li> <li> <b>long press</b> during standby mode</li> </ol>
Answer a call / IsolationMode™	<b>press</b> when there is a call or during a call
Mobile Conferencing™	<b>press at the same time</b> during a phone conversation, change from IsolationMode™ to Mobile Conferencing™
Mute / Unmute the microphone	<b>press at the same time</b> during talking mode
End a call	<b>press</b> when in a call
Reject a call *	<b>press</b> when there is an incoming call
Voice dial	<b>press</b>
Last call redial *	<b>press and hold</b> (about 2 seconds)
Volume up / down	or <b>press</b> when during a call
Disable / Enable LEDs	<b>double press</b> during standby mode
Indicate the battery status	<b>press at the same time</b> during standby mode
Reset	<b>press at the same time</b> during standby mode

Note: \* Your Bluetooth mobile phone must support handsfree profile.

Potentially explosive atmospheres

For safety reason, turn off your electronic device when surrounded by possible explosive atmosphere. It is rare, but your electronic device could generate sparks which can cause an explosion or fire. Areas with a potentially explosive atmosphere are often, but not always, clearly marked. Explosive atmosphere may include gas stations, fuel or chemical storage facilities, and in environment where metal powders, grain are contained in the air.

Power supply

- Power supply must be connected to designated power sources as marked on the product.
- The reduce risk of damage to the electronic cord, only remove it by grasping onto the AC adapter rather than the cord itself from the outlet.
- Make sure the cord is well positioned to avoid potential damage.
- Before attempting to clean the AC power adapter, please unplug the unit from any power source to reduce risk of electronic shock.
- The AC power adapter is designed for indoor use only, and must not be used outdoors.
- If the plug will not fit into the outlet, asking help from a qualified electrician. Improper connection can result in risk of electric shock.

Emergency calls

You should never rely solely upon any electronic device for essential communications (e.g. 911 emergency calls). Keep in mind that when making or receiving a call, your Handsfree Kit and the electronic device connected to must be switched on and in a service area with adequate cellular signal strength. Emergency calls can sometimes be disturbed on certain cellular phone networks or when certain network services and/or phone features are in use. Check with your local cellular service provider for more details.

Battery information

- The rechargeable of your Handsfree Kit is not fully charged when it is new. Before your initial use, please charge your Handsfree Kit for 6 hours first.
- When the rechargeable battery of your Handsfree Kit is low, there will be a battery low tone and the all blue indication will change to red.
- The rechargeable battery of your Handsfree Kit has a long service life if treat ed properly.
- One new battery, or one that has not been used for a long period of time, could have reduced capacity the first few times it is used.
- Use your Handsfree Kit in room temperature for maximum battery capacity.
- Do not expose your Handsfree Kit in an environment temperature above +35°C (+131°F). If your Handsfree Kit is operated in cold temperatures, the battery capacity will be reduced.
- The battery can only be charged in temperatures between +10°C (+50°F) and +45°C (+113°F).

FCC Statement 15.19

The device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:  
 1. This device must accept any interference received, including interference that may cause undesired operation.  
 2. This device may not cause harmful interference.

GG Telecom Warranty Process

1. Should you be having difficulties in the operation of your Handsfree Kit please refer to the online FAQ and support documents.
2. Check our website for more information, updated manuals and troubleshooting.  
[www.gg2002.com](http://www.gg2002.com)
3. Return the unit directly to GG Telecom for testing and replacement of faulty items – Please call or email to arrange a Return Merchandise Authorization(RMA) number.

Warranty Terms and Conditions

1. GG Telecom Warrant the original purchaser of this product only.
2. GG Telecom will replace or repair any faulty product provided it has not been misused or abused in any way.
3. There are no user serviceable parts inside this product.  
Using a nonauthorized repair will void the warranty service.
4. The Handsfree Kit Warranty is valid for 2 years (24 months) from the date of purchase.  
- Proof of purchase must be provided to obtain warranty.  
- Handsfree Kit must be in original packing with serial number for warranty to be valid.
5. Warranties are effective from the proof purchase date and not from the date of any subsequent repair or replacement.



Warranty Card

The product which produced by GG Telecom has been fully exam and pass quality control. Sincere guarantees to Guaranty Certificate by this product to be suitable for the following conditions :

- GG Telecom provides 2 year limited warranty for this product commencing from the date of purchase
- Customers must present the original Warranty Card within product serial number together with original purchase. Invoice to retailer for verification when warranty service is rendered. Within the warranty period, GG Telecom will repair or replace the parts that are damaged under normal circumstance (revalue by GG Telecom) at no additional charge.
- Any cost of transportation is on the account of purchaser.
- Free guarantee service will not be provided to the side equipment if :
  - (a) Any unauthorized repair or modification has been carried out on the unit, or
  - (b) It has been damaged through misuse, negligence, accident, insects or natural calamities, or
  - (c) It has been installed, maintained or operated otherwise than in accordance with the instructions.
- Warranty service is valid worldwide.
- The Warranty card is only valid through authorized retailer only.

Model No. : \_\_\_\_\_  
 Product Serial Number : \_\_\_\_\_  
 Purchase Date : (yy) (mm) (dd)

Dealer : \_\_\_\_\_  
 GG Telecom

Disclaimers

This manual is published by iVOICE TECHNOLOGIES. The information contained in this subject to change without notice. All rights reserved. The Bluetooth word, mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by iVOICE TECHNOLOGIES is under license. Other trademarks and trade names are those of their respective owners.

**CAUTION**  
 Protect your hearing!  
 Do not use your Handsfree Kit at loud volumes or for long periods.  
 Read user guide.



# Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.