

SW6621-44B1

IEEE 802.11a/b/g/n/ac/ax 1T1R+Bluetooth 5.0 Combo Module

DISCLAIMER AND COPYRIGHT NOTICE

Information in this document, including URL references, is subject to change without notice.

This document is provided “As if” with no whatsoever, including any warranty of merchantability, noninfringement, fitness for any purpose, or any warranty otherwise arising out of any proposal, specification or samples.

All liability, including liability for infringement of any proprietary rights, relating to use of information in this document is disclaimed. No licenses express or implied, by estoppel or otherwise, to any intellectual property rights are granted herein.

The Bluetooth logo and symbol belong to the Bluetooth SIG Inc.

The Wi-Fi Alliance Member Logo is a trademark of the Wi-Fi Alliance.

All trade names, trademarks and registered trademarks mentioned in this document are property of their respective owners, and are hereby acknowledged.

Copyright ITON Technology Corp. All rights reserved.

Table of Contents

1. Device Overview	4
1.1 Descriptions	4
1.2 Features	4
1.2.1 General Features	4
1.2.2 Wi-Fi Key Features	4
1.2.3 Bluetooth Key Features	5
1.3 Functional Block Diagram	5
2. Pin Configuration and Functions	6
2.1 Module Pin Diagram	6
2.2 Pin Functions	6
3. Specifications	9
3.1 General Characteristics	9
3.2 RF Characteristics	10
3.2.1 Receiver RF Specifications	11
3.2.2 Transmitter RF Specifications	14
3.2.3 Bluetooth RF Specifications	18
4. Application and Implementation	19
4.1 Application Diagram	19
4.2 Power-up and Power-down Timing	20
5. Mechanical and Package	21
5.1 Mechanical Size	21
5.2 Recommended Land Pattern	21
5.3 Package Information	22

6. Thermal Reflow	22
7. Ordering Information	23
8. Revision History	23



1. Device Overview

1.1 Descriptions

The SW6621-44B1 is a highly integrated module that supports 1T1R 802.11 a/b/g/n/ac/ax with Wireless LAN (WLAN) SDIO (SDIO 1.1/2.0/3.0) interface controller and Bluetooth 5.0 HS-UART interface controller. The high speed FFT/IFFT paths, combined with BPSK, QPSK, 16QAM, 64QAM, 256QAM and up to 1024QAM modulation of the individual subcarriers, and compatible coding rate of 1/2, 2/3, 3/4, 5/6, provide up to 600Mbps for IEEE 802.11ax. The SW6621-44B1 MAC supports 802.11e for multimedia applications, 802.11i and WAPI for security. The SW6621-44B1 provides a complete solution for a high-performance integrated wireless and Bluetooth device. It is suitable for STB, TVs, tablets, phones, IPC and other fields such as consumer electronic devices, and can also be applied to the fields with high reliability requirements, such as industrial interconnection.

1.2 Features

1.2.1 General Features

- Supports 3.3V power supply
- Supports SDIO 3.0
- MAC, Baseband PHY and RF in a single module for IEEE 802.11a/b/g/n/ac/ax compatible WLAN
- IEEE 802.11i (WPA, WPA2, WPA3). Open, shared key, and pair-wise key authentication services
- 12.0mm*12.0mm LGA-44pin package

1.2.2 Wi-Fi Key Features

- Supports IEEE 802.11a/b/g/n/ac/ax wave-2
- Supports IEEE 802.11 d/e/h/i/k/mc/r/v/w
- Supports Wi-Fi STA, AP, P2P, TDLS modes
- Supports LDPC, STBC
- Supports UL/DL OFDMA, DL MU-MIMO
- Supports QoS, WFA WMM, WMM PS
- Supports WPA, WPA2, WPA3 encryption, WAPI
- Supports BSS Color, Spatial Reuse
- Supports TWT, Intra-PPDU PS, VHT txop PS
- Supports WOW
- Supports 2.4GHz and 5GHz band channels
- 20MHz / 40MHz / 80MHz bandwidth transmission
- Maximum data rate up to 600Mbps in 802.11ax

- OFDM with BPSK, QPSK, 16QAM, 64QAM and 256QAM and 1024QAM modulation. Convolutional Coding Rate: 1/2, 2/3, 3/4, and 5/6
- DSSS with DBPSK and DQPSK, CCK modulation with long and short preamble

1.2.3 Bluetooth Key Features

- Supports Bluetooth (Classic BT+BLE) v2.1、v3.0、v4.2、v5.0
- Enhanced BT/Wi-Fi Coexistence Control to improve transmission quality in different profiles
- Supports BR/EDR/LE 1M/LE 2M/LE LR
- Supports sco and esco link
- Supports HS-UART /SDIO interface for BT transfer
- Supports SSP/Secure Connection
- PCM interface for audio data transmission via Bluetooth controller

1.3 Functional Block Diagram

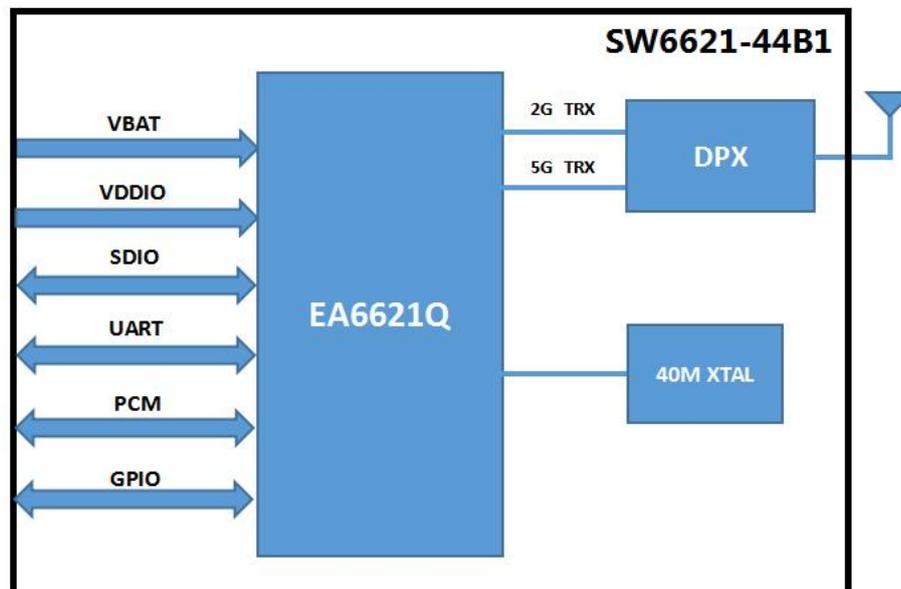


Figure 1. Block Diagram of SW6621-44B1

2. Pin Configuration and Functions

2.1 Module Pin Diagram

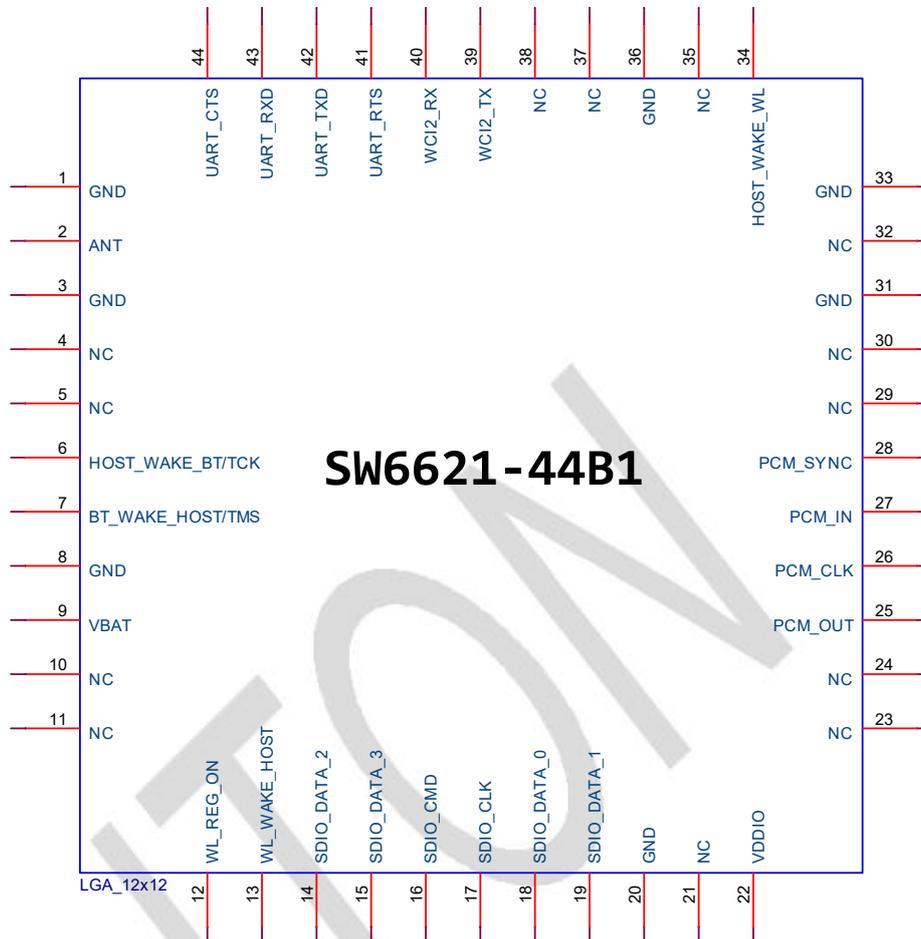


Figure 2.Pin Diagram of SW6621-44B1

2.2 Pin Functions

Pin	Name	Description
1	GND	Ground
2	ANT	WLAN and BT RF input/output port
3	GND	Ground
4	NC	No connect, keep floating
5	NC	No connect, keep floating
6	HOST_WAKE_BT/TCK	Host wake up BT
7	BT_WAKE_HOST/TMS	BT wake up Host

8	GND	Ground
9	VBAT	3.3V power supply
10	NC	Ground
11	NC	Ground
12	WL_REG_ON	Chip Enable pin(high enable/ low disable)
13	WL_WAKE_HOST	WLAN wake up Host
14	SDIO_DATA_2	SDIO port data 2
15	SDIO_DATA_3	SDIO port data 3
16	SDIO_CMD	SDIO Command line
17	SDIO_CLK	SDIO Clock line
18	SDIO_DATA_0	SDIO port data 0
19	SDIO_DATA_1	SDIO port data 1
20	GND	Ground
21	NC	No connect, keep floating
22	VDDIO	I/O power supply
23	NC	No connect, keep floating
24	NC	No connect, keep floating
25	PCM_OUT	PCM data output
26	PCM_CLK	PCM clock
27	PCM_IN	PCM data input
28	PCM_SYNC	PCM sync signal
29	NC	No connect, keep floating
30	NC	No connect, keep floating
31	GND	Ground
32	NC	No connect, keep floating
33	GND	Ground
34	HOST_WAKE_WL	Host wake up WLAN
35	NC	No connect, keep floating
36	GND	Ground
37	NC	No connect, keep floating
38	NC	No connect, keep floating

39	WCI2_TX	WCI2 data transmit
40	WCI2_RX	WCI2 data receive
41	UART_RTS	High-Speed UART1 TX
42	UART_TXD	No connect, keep floating
43	UART_RXD	No connect, keep floating
44	UART_CTS	High-Speed UART1 RX



3. Specifications

3.1 General Characteristics

Category	Descriptions
Dimension	L*W*H :12.0mm (±0.2mm)*12.0mm (±0.2mm)*2.4mm (±0.2mm)
Chip-set	EA6621Q
Standard	IEEE 802.11a/b/g/n/ac/ax+BT 5.0
Modulation Type	CCK, OFDM (16 QAM/64 QAM/256 QAM/1024 QAM),OFDMA
Frequency Band	2400~2500MHz,4900-5845MHz
Interface	WLAN& Bluetooth: SDIO
Data Security	WPA/WPA2/WPA3
Transmit Power (Conducted)	<p>2.4G:</p> <p>11b 1M:20±2dBm</p> <p>11b 11M:20±2dBm</p> <p>11g 6M:20±2dBm</p> <p>11g 54M:18±2dBm</p> <p>11n HT20 MCS0:20±2dBm</p> <p>11n HT20 MCS7:17±2dBm</p> <p>11n HT40 MCS0:20±2dBm</p> <p>11n HT40 MCS7:17±2dBm</p> <p>11ax HE20 MCS0 20±2dBm</p> <p>11ax HE20 MCS11 13±2dBm</p> <p>11ax HE40 MCS0 20±2dBm</p> <p>11ax HE40 MCS11 13±2dBm</p> <p>5G:</p> <p>11a 6M:20±2dBm</p> <p>11a 54M:18±2dBm</p> <p>11n HT20 MCS0:19±2dBm</p> <p>11n HT20 MCS7:16±2dBm</p> <p>11n HT40 MCS0:19±2dBm</p> <p>11n HT40 MCS7:16±2dBm</p> <p>11ac VHT20 MCS0:19±2dBm</p> <p>11ac VHT20 MCS8:16±2dBm</p> <p>11ac VHT40 MCS0:19±2dBm</p> <p>11ac VHT40 MCS9:15±2dBm</p> <p>11ac VHT80 MCS0:19±2dBm</p> <p>11ac VHT80 MCS9:15±2dBm</p>

	11ax HE20 MCS0 19±2dBm 11ax HE20 MCS11 13±2dBm 11ax HE40 MCS11 19±2dBm 11ax HE40 MCS11 13±2dBm 11ax HE80 MCS0 19±2dBm 11ax HE80 MCS11 13±2dBm
Rx Sensitivity	2.4G: 11b 11M:-91dBm@8% PER 11g 54M: -77dBm@10% PER 11n HT20 MCS7: -75dBm@10% PER 11n HT40 MCS7: -72dBm@10% PER 11ax HE40 MCS11: -61dBm@10% PER 5G: 11a 54M:-76dBm@10% PER 11n HT20 MCS7: -74dBm@10% PER 11n HT40 MCS7: -71dBm@10% PER 11ac VTH80 MCS9:-62dBm@10% PER 11ax HE40 MCS11: -61dBm@10% PER 11ax HE80 MCS11: -58dBm@10% PER
Data Rate	802.11b [11,5.5,2 and 1Mbps] 802.11g [54,48,36,24,18,12,9&6Mbps] 802.11n HT20:up to 72.2Mbps 802.11n HT40:up to 150Mbps 802.11ac VHT80:up to 433Mbps 802.11ax HE20:up to 143.4Mbps 802.11ax HE40:up to 286.8Mbps 802.11ax HE80:up to 600Mbps
Frequency Error	2.4GHz:<±25 ppm(11b),<±20 ppm(11g/n);5GHz:<±20 ppm
Ambient Temperature	-30℃~70℃
Storage Temperature	-40℃~85℃
Antenna	External antenna
Operating System	Linux
Operating Voltage	VBAT:3.3V VDDIO:3.3V or 1.8V

3.2 RF Characteristics

All measurements are made under nominal supply voltage, room temperature and conducted conditions at

each antenna port rather than antenna.

3.2.1 Receiver RF Specifications

Parameter	Conditions		Min.	Nom.	Max.	Unit
Receive input frequency						
2.4GHz	802.11b/g/n/ax mode		2400	-	2500	MHz
Receiver sensitivity						
802.11b	1Mbps	FER<8%, Packet size= 1,024bytes	-	-	-82	dBm
	2Mbps		-	-	-80	dBm
	5.5Mbps		-	-	-78	dBm
	11Mbps		-	-	-76	dBm
802.11g	6Mbps	PER<10%, Packet size= 1,024bytes	-	-	-82	dBm
	9Mbps		-	-	-81	dBm
	12Mbps		-	-	-79	dBm
	18Mbps		-	-	-77	dBm
	24Mbps		-	-	-74	dBm
	36Mbps		-	-	-70	dBm
	48Mbps		-	-	-66	dBm
	54Mbps		-	-	-65	dBm
802.11n (HT20)	MCS0.	PER<10%, Packet size= 4,096bytes	-	-	-82	dBm
	MCS1.		-	-	-79	dBm
	MCS2		-	-	-77	dBm
	MCS3.		-	-	-74	dBm
	MCS4.		-	-	-70	dBm
	MCS5.		-	-	-66	dBm
	MCS6.		-	-	-65	dBm
	MCS7.		-	-	-64	dBm
802.11n (HT40)	MCS0.	PER<10%, Packet size= 4,096bytes	-	-	-79	dBm
	MCS1.		-	-	-77	dBm
	MCS2		-	-	-74	dBm
	MCS3.		-	-	-71	dBm
	MCS4.		-	-	-67	dBm
	MCS5.		-	-	-63	dBm
	MCS6.		-	-	-62	dBm
	MCS7.		-	-	-61	dBm

802.11ax (HE20)	MCS0.	PER<10%, Packet size= 4,096bytes	-	-	-82	dBm
	MCS1.		-	-	-79	dBm
	MCS2		-	-	-77	dBm
	MCS3.		-	-	-74	dBm
	MCS4.		-	-	-70	dBm
	MCS5.		-	-	-66	dBm
	MCS6.		-	-	-65	dBm
	MCS7.		-	-	-64	dBm
	MCS8.		-	-	-59	dBm
	MCS9.		-	-	-57	dBm
	MCS10.		-	-	-54	dBm
	MCS11.		-	-	-52	dBm
802.11ax (HE40)	MCS0.	PER<10%, Packet size= 4,096bytes	-	-	-79	dBm
	MCS1.		-	-	-76	dBm
	MCS2		-	-	-74	dBm
	MCS3.		-	-	-71	dBm
	MCS4.		-	-	-67	dBm
	MCS5.		-	-	-63	dBm
	MCS6.		-	-	-62	dBm
	MCS7.		-	-	-61	dBm
	MCS8.		-	-	-56	dBm
	MCS9.		-	-	-54	dBm
	MCS10.		-	-	-51	dBm
	MCS11.		-	-	-49	dBm
Maximum input level						
802.11b	FER<8%		-10	-	-	dBm
802.11g	FER<10%		-20	-	-	dBm
802.11n	FER<10%		-30			dBm
802.11ax	FER<10%		-20			dBm

Parameter	Conditions		Min.	Nom.	Max.	Unit
Receive input frequency						
5GHz	802.11a/n/ac/ax mode		4900	-	5845	MHz
Receiver sensitivity						
802.11a	6Mbps	FER<10%,	-	-	-82	dBm
	9Mbps	Packet size=	-	-	-81	dBm

	12Mbps	1,024bytes	-	-	-79	dBm
	18Mbps		-	-	-77	dBm
	24Mbps		-	-	-74	dBm
	36Mbps		-	-	-70	dBm
	48Mbps		-	-	-66	dBm
	54Mbps		-	-	-65	dBm
802.11n (HT20)	6Mbps	PER<10%, Packet size= 4,096bytes	-	-	-82	dBm
	9Mbps		-	-	-79	dBm
	12Mbps		-	-	-77	dBm
	18Mbps		-	-	-74	dBm
	24Mbps		-	-	-70	dBm
	36Mbps		-	-	-66	dBm
	48Mbps		-	-	-65	dBm
	54Mbps		-	-	-64	dBm
802.11n (HT40)	MCS0.	PER<10%, Packet size= 4,096bytes	-	-	-79	dBm
	MCS1.		-	-	-77	dBm
	MCS2		-	-	-74	dBm
	MCS3.		-	-	-71	dBm
	MCS4.		-	-	-67	dBm
	MCS5.		-	-	-63	dBm
	MCS6.		-	-	-62	dBm
	MCS7.		-	-	-61	dBm
802.11ac (VHT80)	MCS0.	PER<10%, Packet size= 4,096bytes	-	-	-76	dBm
	MCS1.		-	-	-73	dBm
	MCS2		-	-	-71	dBm
	MCS3.		-	-	-68	dBm
	MCS4.		-	-	-64	dBm
	MCS5.		-	-	-60	dBm
	MCS6.		-	-	-59	dBm
	MCS7.		-	-	-58	dBm
	MCS8.		-	-	-53	dBm
	MCS9.		-	-	-51	dBm
802.11ax (HE80)	MCS0.	PER<10%, Packet size= 4,096bytes	-	-	-76	dBm
	MCS1.		-	-	-73	dBm
	MCS2		-	-	-71	dBm
	MCS3.		-	-	-68	dBm

	MCS4.		-	-	-64	dBm
	MCS5.		-	-	-60	dBm
	MCS6.		-	-	-59	dBm
	MCS7.		-	-	-58	dBm
	MCS8.		-	-	-53	dBm
	MCS9.		-	-	-51	dBm
	MCS10.		-	-	-48	dBm
	MCS11.		-	-	-46	dBm
Maximum input level						
802.11a	FER<10%		-30	-	-	dBm
802.11n	FER<10%		-30	-	-	dBm
802.11ac	FER<10%		-30	-	-	dBm
802.11ax	FER<10%		-30	-	-	dBm

3.2.2 Transmitter RF Specifications

Parameter	Condition	Min.	Nom.	Max.	Unit.
Receive input frequency					
802.11b/g/n/ax	2.4GHz	2400	-	2500	MHz
Transmit power					
802.11b	11Mbps	18	20	22	dBm
802.11g	54Mbps	16	18	20	dBm
802.11n	HT20, MCS7	15	17	19	dBm
	HT40, MCS7	15	17	19	dBm
802.11ax	HE20, MCS11	11	13	15	dBm
	HE40, MCS11	11	13	15	dBm
Spectrum mask					
802.11b	$f_c - 22\text{MHz} < f < f_c - 11\text{MHz} \& f_c + 11\text{MHz} < f < f_c + 22\text{MHz}$	-	-	-30	dBr
	$f_c - 55\text{MHz} < f < f_c - 22\text{MHz} \& f_c + 22\text{MHz} < f < f_c + 55\text{MHz}$	-	-	-50	dBr
802.11g	$f_c \pm 9\text{MHz}$	-	-	0	dBr
	$f_c \pm 11\text{MHz}$	-	-	-20	dBr
	$f_c \pm 20\text{MHz}$	-	-	-28	dBr
	$f_c \pm 30\text{MHz}$	-	-	-40	dBr
802.11n	$f_c \pm 9\text{MHz}$	-	-	0	dBr

	$f_c \pm 11\text{MHz}$	-	-	-20	dBr
	$f_c \pm 20\text{MHz}$	-	-	-28	dBr
	$f_c \pm 30\text{MHz}$	-	-	-45	dBr
802.11ax (HE40)	$f_c \pm 19.5\text{MHz}$	-	-	0	dBr
	$f_c \pm 20.5\text{MHz}$	-	-	-20	dBr
	$f_c \pm 40\text{MHz}$	-	-	-28	dBr
	$f_c \pm 60\text{MHz}$	-	-	-40	dBr
Center frequency tolerance					
802.11b		-25	-	+25	pmm
802.11g/n/ax		-20	-	+20	pmm
EVM (Error Vector Magnitude)*					
802.11b	1Mbps	-	-	35	%
	2Mbps	-	-	35	%
	5.5Mbps	-	-	35	%
	11Mbps	-	-	35	%
802.11g	6Mbps	-	-	-5	%
	9Mbps	-	-	-8	dB
	12Mbps	-	-	-10	dB
	18Mbps	-	-	-13	dB
	24Mbps	-	-	-16	dB
	36Mbps	-	-	-19	dB
	48Mbps	-	-	-22	dB
	54Mbps	-	-	-25	dB
802.11n	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB
	MCS5.	-	-	-22	dB
	MCS6.	-	-	-25	dB
	MCS7.	-	-	-28	dB
802.11ax	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB

	MCS5.	-	-	-22	dB
	MCS6.	-	-	-25	dB
	MCS7.	-	-	-27	dB
	MCS8.	-	-	-30	dB
	MCS9.	-	-	-32	dB
	MCS10.	-	-	-35	dB
	MCS11.	-	-	-35	dB

Remarks

EVM :

<Test condition>

Method: composite EVM method.

Phase correction: Symbol-by-symbol correction.

Channel estimation: Raw channel estimate Raw Long Symbols.

Symbol timing correction: on.

Frequency Sync: Long training symbol.

Parameter	Condition	Min.	Nom.	Max.	Unit.
Receive input frequency					
802.11a/n/ac/ax	5GHz	4900	-	5845	MHz
Transmit power					
802.11a	54Mbps	16	18	20	dBm
802.11n	HT20, MCS7	14	16	18	dBm
	HT40, MCS7	14	16	18	dBm
802.11ac	VHT20, MCS8	14	16	18	dBm
	VHT40, MCS9	13	15	17	dBm
	VHT80, MCS9	13	15	17	dBm
802.11ax	HE20, MCS11	11	13	15	dBm
	HE40, MCS11	11	13	15	dBm
	HE80, MCS11	11	13	15	dBm
Spectrum mask					
802.11a	$f_c \pm 9\text{MHz}$	-	-	0	dBr
	$f_c \pm 11\text{MHz}$	-	-	-20	dBr
	$f_c \pm 20\text{MHz}$	-	-	-28	dBr
	$f_c \pm 30\text{MHz}$	-	-	-40	dBr
802.11n	$f_c \pm 9\text{MHz}$	-	-	0	dBr
	$f_c \pm 11\text{MHz}$	-	-	-20	dBr
	$f_c \pm 20\text{MHz}$	-	-	-28	dBr

	$f_c \pm 30\text{MHz}$	-	-	-45	dBr
802.11ac (VHT80)	$f_c \pm 39\text{MHz}$	-	-	0	dBr
	$f_c \pm 41\text{MHz}$	-	-	-20	dBr
	$f_c \pm 80\text{MHz}$	-	-	-28	dBr
	$f_c \pm 120\text{MHz}$	-	-	-40	dBr
802.11ax (HE80)	$f_c \pm 39.5\text{MHz}$	-	-	0	dBr
	$f_c \pm 40.5\text{MHz}$	-	-	-20	dBr
	$f_c \pm 80\text{MHz}$	-	-	-28	dBr
	$f_c \pm 120\text{MHz}$	-	-	-40	dBr
Center frequency tolerance					
802.11a/n/ac/ax		-20	-	+20	pmm
EVM (Error Vector Magnitude)*					
802.11a	6Mbps	-	-	-5	%
	9Mbps	-	-	-8	dB
	12Mbps	-	-	-10	dB
	18Mbps	-	-	-13	dB
	24Mbps	-	-	-16	dB
	36Mbps	-	-	-19	dB
	48Mbps	-	-	-22	dB
	54Mbps	-	-	-25	dB
802.11n	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB
	MCS5.	-	-	-22	dB
	MCS6.	-	-	-25	dB
	MCS7.	-	-	-28	dB
802.11ac	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB
	MCS5.	-	-	-22	dB
	MCS6.	-	-	-25	dB
	MCS7.	-	-	-27	dB

	MCS8.	-	-	-30	dB
	MCS9.	-	-	-32	dB
802.11ax	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB
	MCS5.	-	-	-22	dB
	MCS6.	-	-	-25	dB
	MCS7.	-	-	-27	dB
	MCS8.	-	-	-30	dB
	MCS9.	-	-	-32	dB
	MCS10.	-	-	-35	dB
	MCS11.	-	-	-35	dB
Remarks					
EVM : <Test condition> Method: composite EVM method. Phase correction: Symbol-by-symbol correction. Channel estimation: Raw channel estimate Raw Long Symbols. Symbol timing correction: on. Frequency Sync: Long training symbol.					

3.2.3 Bluetooth RF Specifications

Parameter	Conditions	Minimum	Typical	Maximum	Unit
Frequency range		2402		2480	MHz
RX sensitivity	DH5	-	-91	-	dBm
	2DH5	-	-90	-	dBm
	3DH5	-	-83	-	dBm
	LE 1M	-	-95	-	dBm
	LE 2M	-	-93	-	dBm
Initial carrier frequency offset		-24	5	24	KHz
Output power	Class 1/GFSK	-	8	-	dBm
	Class 2/GFSK	- 6	0	4	dBm

4. Application and Implementation

4.1 Application Diagram

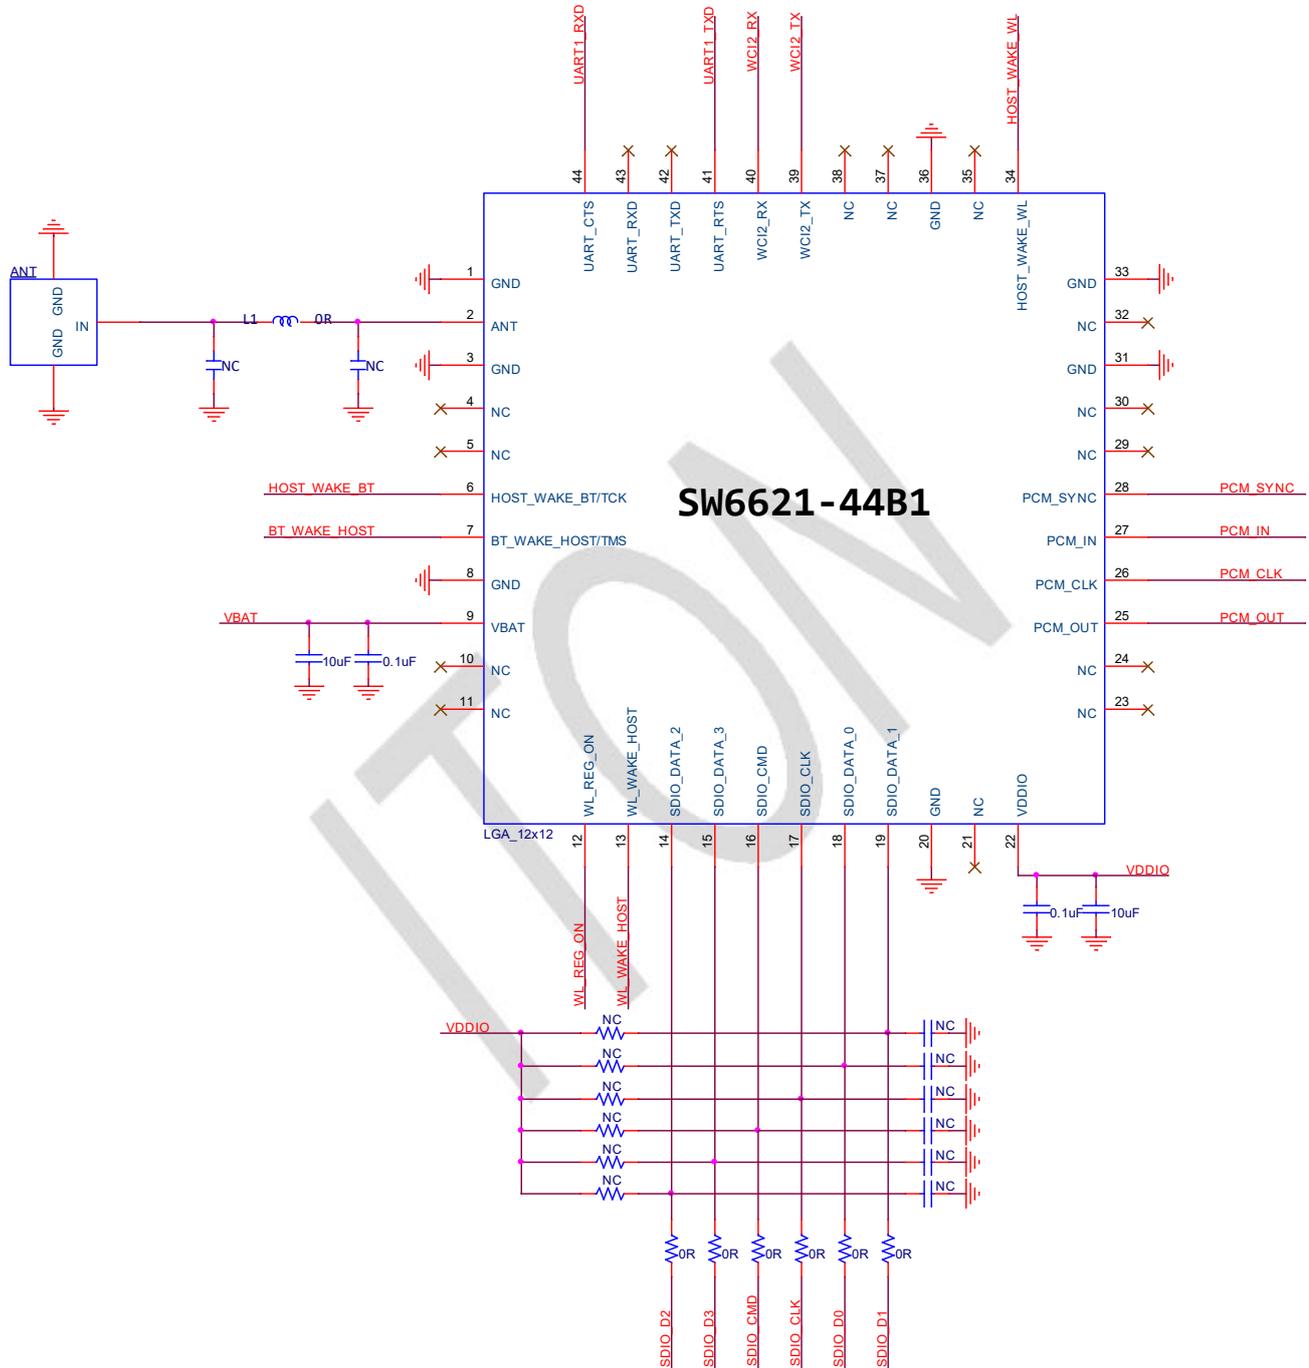


Figure 3. Application Schematic Diagram of SW6621-44B1

4.2 Power-up and Power-down Timing



Figure 4. Power-up and Power-down Timing of SW6621-44B1

	Description	Min	Typical	Max
T1	VBAT Ramp up time	200us	-	-
T2	VDDIO should be powered on after VBAT is powered on	0	-	-
T3	WL_REG_ON should be powered on after VDDIO is powered on	0	-	-
T4	WL_REG_ON reset time	50ms	-	-

5. Mechanical and Package

5.1 Mechanical Size

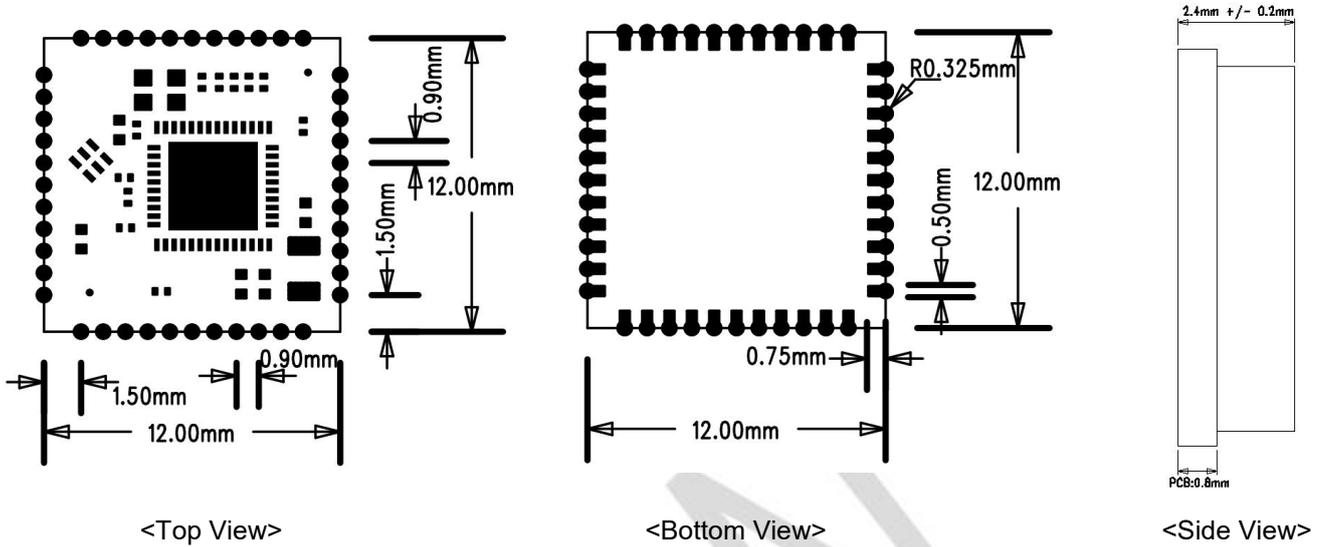


Figure 5. Mechanical Size of SW6621-44B1

5.2 Recommended Land Pattern

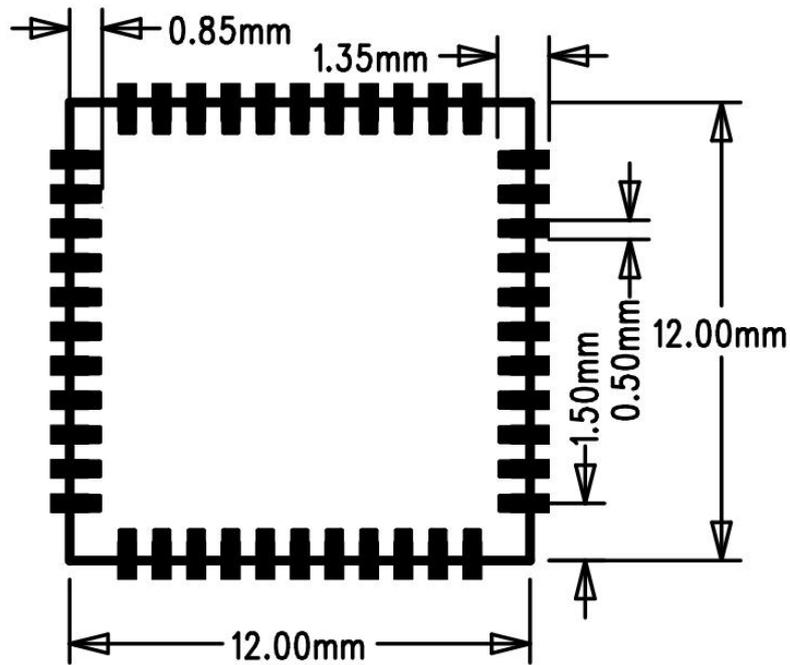


Figure 6. Recommended Land Pattern of SW6621-44B1

5.3 Package Information

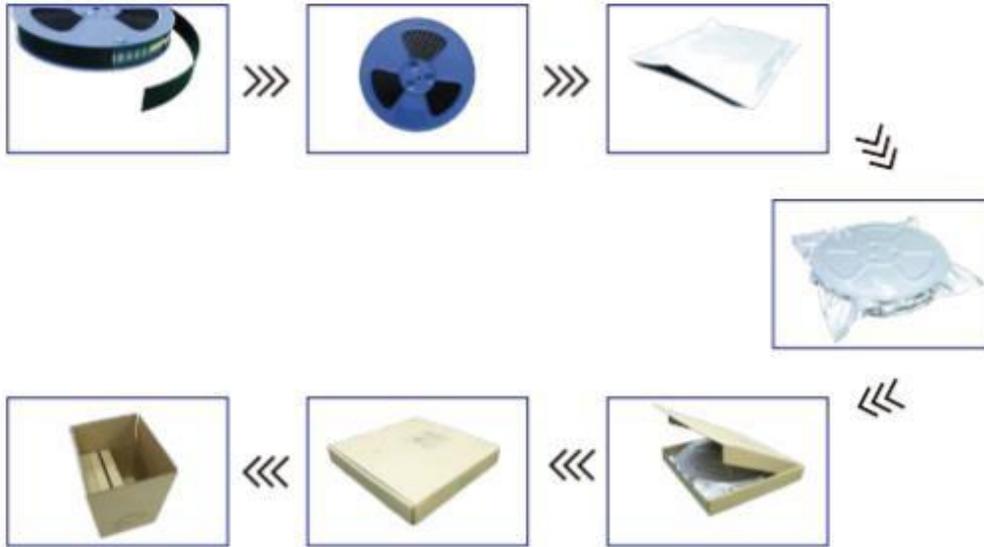


Figure 7. Brief Packaging Process of SW6621-44B1 Modules

6. Thermal Reflow

Referred to IPC/JEDEC standard.

Peak temperature: <math><250^{\circ}\text{C}</math>

Number of times: ≤ 2

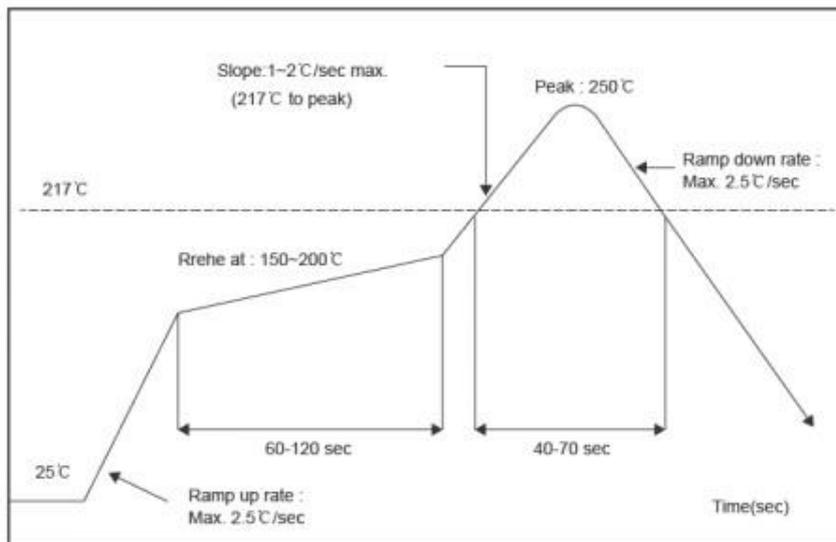


Figure 8. Recommended Reflow for Lead Free Solder

Note: The module is recommended not to go through reflow over twice.

7. Ordering Information

Part NO.	Working Voltage	ANT	Shielding Cover	Remark
SW6621-44B1	3.3V	External antenna	Included	SDIO

8. Revision History

Version	Change Content	Reviser	Date
V0.1	Draft Version	Phil	2023.3.24
V0.2	Update BT communication interface	Phil	2023.7.20
V0.3	Update Pin Diagram Update Application Diagram	Phil	2023.8.7
V0.4	Update Pin Diagram Update Application Diagram	Phil	2023.9.21

FCC Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

***RF warning for Mobile device:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

The OEM must certify the final end product to comply with unintentional radiators (FCC Sections 15.107 and 15.109) before declaring compliance of the final product to Part 15 of the FCC rules and regulations. Integration into devices that are directly or indirectly connected to AC lines must add with Class II Permissive Change.

The OEM must comply with the FCC labeling requirements. If the module's label is not visible when installed, then an additional permanent label must be applied on the outside of the finished product which states: "Contains transmitter module FCC ID: VYV-SW6621-44B1".

Additionally, the following statement should be included on the label and in the final product's user manual:

"This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interferences, and
- (2) this device must accept any interference received, including interference that may cause undesired operation." The module is limited to installation in applications. Separate approval is required for all other operating configurations, including portable configuration with respect to Part 2.1093 and different antenna configurations. A module or modules can only be used without additional authorizations if they have been tested and granted under the same intended end - use operational conditions, including simultaneous transmission operations. When they have not been tested and granted in this manner, additional testing and/or FCC application filing may be required. The most straightforward approach to address additional testing conditions is to have the grantee responsible for the certification of at least one of the modules submit a permissive change application. When having a module grantee file a permissive change is not practical or feasible, the following guidance provides some additional options for host manufacturers. Integrations using modules where additional testing and/or FCC application filing(s) may be required are: (A) a module used in devices requiring additional RF exposure compliance information (e.g., MPE evaluation or SAR testing); (B) limited and/or split modules not meeting all of the module requirements; and (C) simultaneous transmissions for independent collocated transmitters not previously granted together. This Module is full modular approval, it is limited to OEM installation ONLY. Integration into devices that are directly or indirectly connected to AC lines must add with Class II Permissive Change. (OEM) Integrator has to assure compliance of the entire end product include the integrated Module.

Additional measurements (15B) and/or equipment authorizations (e.g. Verification) may need to be addressed depending on co-location or simultaneous transmission issues if applicable. (OEM) Integrator is reminded to assure that these installation

instructions will not be made available to the end user.

Integration instructions for host product manufacturers according to KDB 996369 D03 OEM Manual v01

2.2 List of applicable FCC rules

FCC Part 15 Subpart C 15.247 & 15.207 & 15.209 & 15.205

FCC Part 15 Subpart E 15.407

2.3 Specific operational use conditions

When installed in smart terminal products, the host manufacturer must negotiate with the module manufacturer on the final installation method in the system. The module can be used for mobile applications with a maximum 3.16 dBi antenna. The host manufacturer installing this module into their product must ensure that the final product complies with the FCC requirements by a technical assessment or evaluation to the FCC rules, including the transmitter operation. The host manufacturer has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

The module should be installed and operated with minimum distance 20cm between the radiator & your body. and if RF exposure statement or module layout is changed, then the host product manufacturer required to take responsibility of the module through a change in FCC ID or new application. The FCC ID of the module cannot be used on the final product. In these circumstances, the host manufacturer will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization. When the host is a portable device, it is necessary to take a SAR test with your set mounting this module. Class II permissive change application is necessary using the SAR report. Please contact kevin (kevin@sziton.com). And an application for a Class II permissive change from a Mobile equipment to a Portable equipment is also required.

Note) Portable equipment : Equipment for which the spaces between human body and antenna are used within 20cm. Mobile equipment : Equipment used at position in which the spaces between human body and antenna exceeded 20cm.

1. According to the following requirements of the power supply DC3.3V, power up, about 3 seconds to to complete the initial.
2. iphone/Android mobile phone BT/WIFI function to open, search to the corresponding Wireless network adapter name (name can be changed according to customer production requirements), click the name of the BT/WIFI and select the connection.
3. open application software (need to install the company's specific application software development, application software interface can be customized according to customer's product requirements).

2.4 Limited module procedures

The module is a Single module.

Requirement per 15.212 and KDB 996369 D01	Explanation from Grantee (do not write yes/no, but explain why product complies/how it is achieved)
The radio elements must have the radio frequency circuitry shielded. Physical components and tuning capacitor(s) may be located external to the shield, but must be on the module assembly.	Has RF shielding.
The module must have buffered modulation/data inputs to ensure that the device will comply with Part 15 requirements with any type of input signal.	The modular have buffered modulation/data inputs.
The module must contain power supply regulation on the module.	The modular transmitter have its own power supply regulation.(DC 3.3V)
The module must contain a permanently attached antenna, or contain a unique antenna connector, and be marketed and operated only with specific antenna(s), per §§ 15.203, 15.204(b), 15.204(c), 15.212(a), 2.929(b).	Antenna restrictions are added in the manual.The antenna needs to be professionally installed.
The module must demonstrate compliance in a stand-alone configuration.	The module was tested in a stand-alone configuration, please refer to the Setup Photo for the detail
The module must be labeled with its permanently affixed FCC ID label, or use an electronic display (see KDB Publication 784748).	Please refer to label sample exhibit - host labeling is described in integration manual
The module must comply with all specific rules applicable to the transmitter, including all the conditions provided in the integration instructions by the grantee.	The required FCC rule has been fulfilled and all the instructions for the maintaining compliance have been clearly stated in the User Manual.
The module must comply with RF exposure requirements	The MPE evaluation with 20cm distance restriction is submitted for the compliance of RF Exposure requirement.

2.5 Trace antenna designs


Please perform the Trace antenna design that followed the specifications of the antenna.

The concrete contents of a check are the following three points.


- 1) It is the same type as the antenna type of antenna specifications. Confirm the same size as the Gerber file.
- 2) An antenna gain is lower than a gain given in antenna specifications. Measure the gain, and confirm the peak gain is less than 3.16dBi.
- 3) The emission level is not getting worse. Measure the spurious, and confirm degradation of less than 3dB than spurious value of worst of report used for the application.

Dipole Antenna specification

You can see antenna size is $108 \pm 2\text{mm} \times 7.9\text{mm}$ From below Specification.

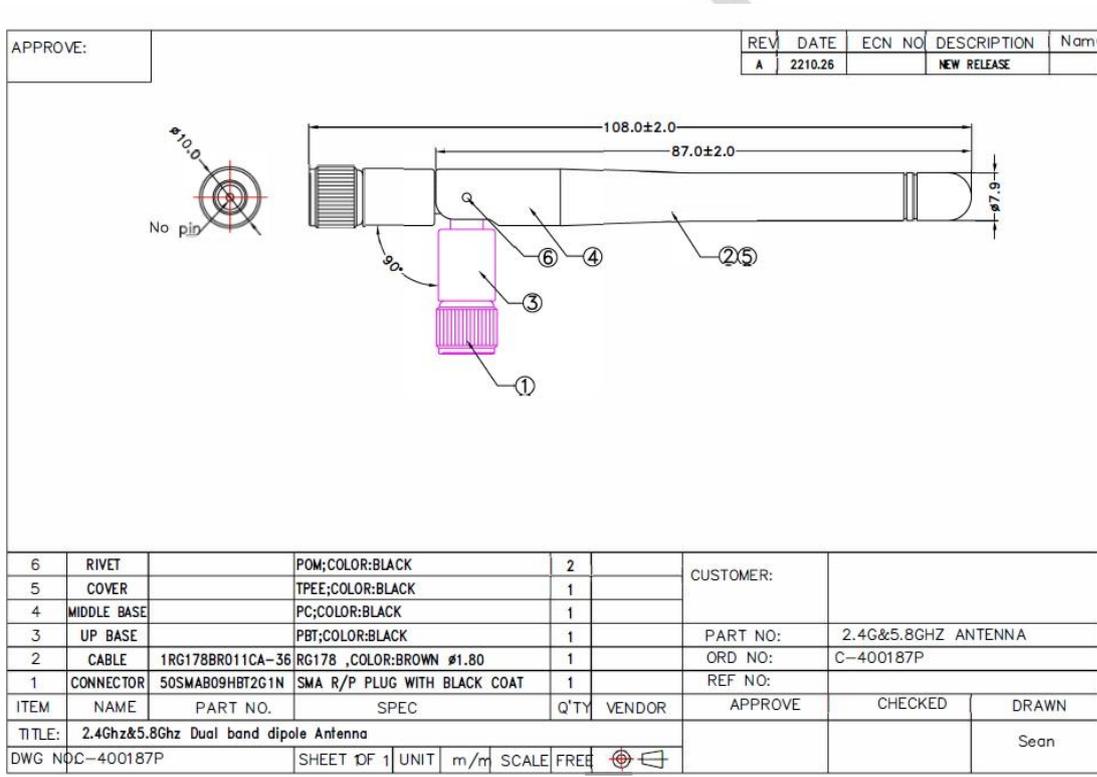

Please refer to the chart below for PCB size of RF line terminal.

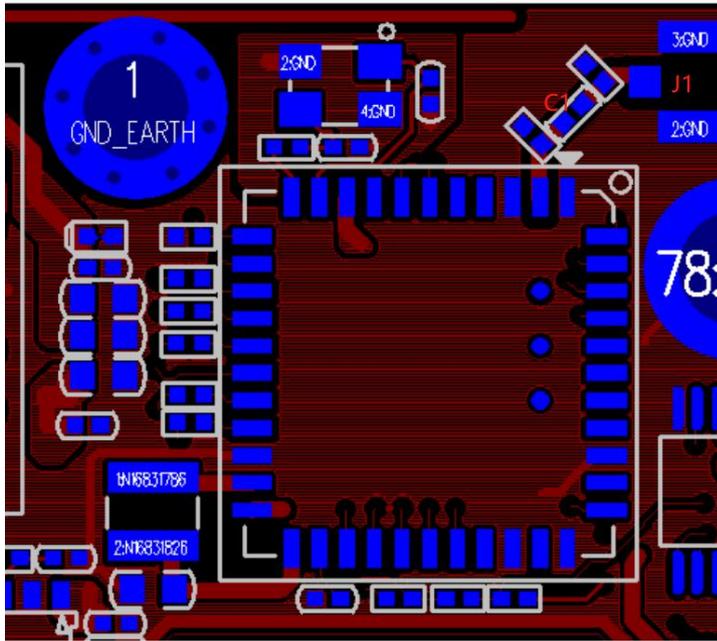

Scrape a GND off the side of the J1, connect the FPC antenna to the PCB at the position of the J1 connector. [The line between the FPC antenna and the WiFi module] must be 50 ohm. C1 is 10pF Capacitors.

2.6 RF exposure considerations

The module complies with FCC radiation exposure limits set forth for an uncontrolled environment. The module should be installed and operated with minimum distance 20cm between the radiator & your body.

2.7 Antennas

This module has been approved to operate with the antenna types listed below, with the maximum permissible gain indicated. The module antenna requires professional installation, and the antenna type cannot be changed. The gain cannot exceed 3.16dBi.

Frequency band	Antenna Type	Model Number	Max Gain
2400-2500MHz	Dipole Antenna	N1911	2.53(dBi)
5150~5250MHz	Dipole Antenna	N1911	1.87(dBi)
5250~5350MHz	Dipole Antenna	N1911	2.11(dBi)
5470~5725MHz	Dipole Antenna	N1911	2.93(dBi)
5725~5850MHz	Dipole Antenna	N1911	3.16(dBi)

This device is intended only for host manufacturers under the following conditions: The transmitter module may not be co-located with any other transmitter or antenna; The module shall be only used with the External antenna(s) that has been originally tested and certified with this module. The antenna must be either permanently attached or employ a 'unique' antenna coupler.

As long as the conditions above are met, further transmitter test will not be required. However, the host manufacturer is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

2.8 Label and compliance information

Host product manufacturers need to provide a physical or e-label stating

“Contains FCC ID: VYV-SW6621-44B1 With their finished product.

2.9 Information on test modes and additional testing requirements

The module complies with FCC radiation exposure limits set forth for an uncontrolled environment. The module should be installed and operated with minimum distance 20cm between the radiator & your body. and if RF exposure statement or module layout is changed, then the host product manufacturer required to take responsibility of the module through a change in FCC ID or new application. The FCC ID of the module cannot be used on the final product. In these circumstances, the host manufacturer will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization. When the host is a portable device, it is necessary to take a SAR test with your set mounting this module. Class II permissive change application is necessary using the SAR report. Please contact kevin (kevin@sziton.com). And an application for a Class II permissive change from a Mobile equipment to a Portable equipment is also required.

Note) Portable equipment : Equipment for which the spaces between human body and antenna are used within 20cm. Mobile equipment : Equipment used at position in which the spaces between human body and antenna exceeded 20cm.

Host manufacturer must perform test of radiated & conducted emission and spurious emission, etc according to the actual test modes for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product.

Only when all the test results of test modes comply with FCC requirements, then the end product can be sold legally.


2.10 Additional testing, Part 15 Subpart B disclaimer

The modular transmitter is only FCC authorized for FCC Part 15 Subpart C 15.247 & 15.407 & 15.207 & 15.209 & 15.205 and that the host product manufacturer is responsible for compliance

to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

2.11 The user manual of the end product should include:

- a) Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.
- b) The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons.
- c) This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- d) This device is restricted to indoor use.
- e) The antenna(s) used for this transmitter must not transmit simultaneously with any other antenna or transmitter.

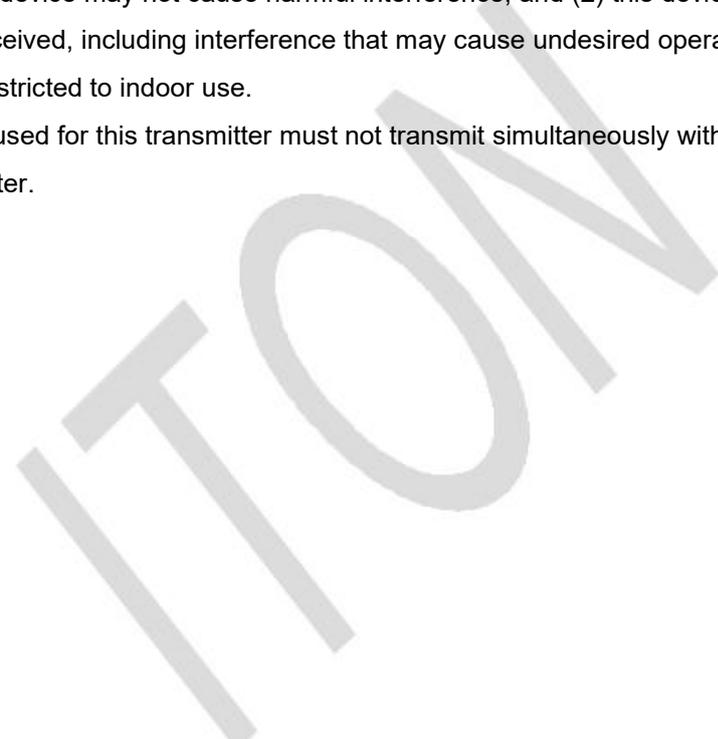

IC Warning

This device complies with Industry Canada's licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil n' doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

IC RF Statement:

When using the product, maintain a distance of 20cm from the body to ensure compliance with RF exposure requirements.

Déclaration IC RF:

Lors de l'utilisation du produit, maintenez une distance de 20 cm du corps pour garantir conformité aux exigences d' exposition aux RF.