

Circular Polarity Wide Band RFID Panel Antenna**865-960 MHz 8.5 dBic CIRCULAR POLARITY PANEL**

The Laird Technologies' S8658WPR antenna is a circularly polarized panel antenna that provides reception and transmission of signals in the 865-960 MHz frequency band. Laird Technologies' industry renowned design methodology achieves maximum efficiency and performance across the entire frequency band.

Both VSWR and axial ratios are both excellent and allow the user to achieve the maximum performance for an antenna of this type. The antenna is housed in a heavy duty radome enclosure that can be directly wall mounted. An optional articulating mount allows either wall or mast mounting.

The antenna is offered with an integrated coax pigtail and a variety of connector types are available.

FEATURES 

- Low profile
- Extremely low VSWR and axial ratio
- Wide band
- Weather and UV resistant radome
- Wide range of connector and cable options
- Left hand and right hand CP versions

APPLICATIONS

- Warehouse
- Distribution center
- Airports and hospitals
- Transit terminals
- Conveyer belt

global solutions: local support™


Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

Circular Polarity Wide Band RFID Panel Antenna

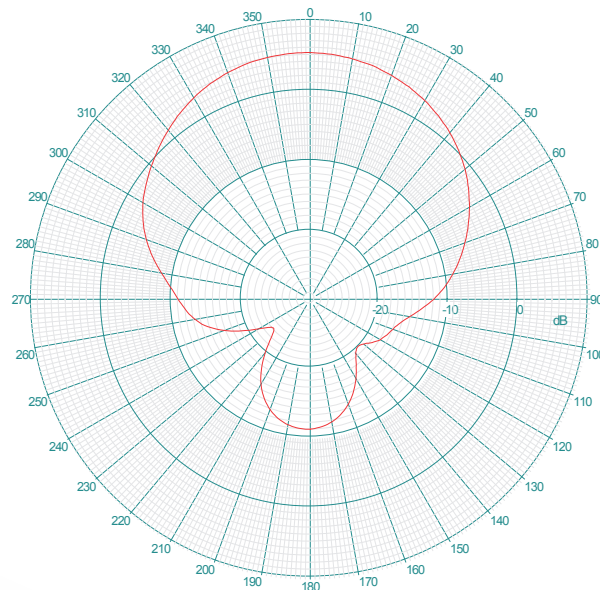

902 MHz

SPECIFICATIONS

Antenna Part Number	S8658WPR and S8658WPL
Frequency Range	865 - 960 MHz
Gain	8.5 dBic
Maxium VSWR	1.4:1
3 dB Beamwidth - Azimuth	65°
Front to Back Ratio	20 dB
Polarization	Circular Right-hand or circular Left-hand
Maxium Input Power	3 Watts
Input Impedence	50 Ohms
Axial Ratio	1dB
Weight (Kg)	2.5 lbs (1.13)
Mechanical Size	10.2" x 10.2" x 1.32"
Antenna Connection	Coax Pigtail, Rev TNC Male (others available)
Radome	High Strength PC
Mount Style	Threaded Stud
Temperature Operational	-25°C to +70°C
Lightning Protection	DC Grounded
Environmental Rating	IP 54

ANT-DS-S8658WPR S8658WPL 0409

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request. All Laird Technologies' products are sold pursuant to the Laird Technologies' domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© 2009 All Rights Reserved
Laird Technologies is a registered trademark of Laird Technologies, Inc