




Mini Smart Socket Instruction

► What's in the Box

Home Control Outlet x 1
User Manual x 1

► At a Glance



1. Socket Panel
2. Flame Resistant Material
3. ON/OFF Button
4. Power Plug

Note: ON/OFF button can be used as restore button, long press can change the flashing speed and will restore your


smart socket to factory defaults. Only do this if you are sure you want to erase all your settings.

► Parameters

Model Number: WP1
Rated Voltage: 110-240V
Rated Current: 10 A (Max)
AC Frequency: 50-60HZ
Working Temp.: -10 ~ 60°C
WIFI frequency: 2.4Ghz
Maximum Total Power Output: 2200W

► Install the "Smart Life" APP

1. You may find the "Smart Life" app on Apple App store, Google Play, or Scan the QR code below and install it;
2. Enter the register / log in interface, input the phone number for getting the verification code to register an account.



The free app "Smart Life" is compatible with mobile devices that support iOS 8.0 above, Android 4.4 above.

► Connecting Your Socket with APP

A. Easy Mode (Recommend)

1. Please make sure the mini socket has connected with electricity at the beginning, then open the "Smart Life" APP, tap the "ADD DEVICES" or the "+" at the upper right corner of the page and select "Electrical outlet";

2. long press on/off button of the device for 5 seconds until indicator light quickly flashed, the interface page already stepped into "Add Device" Page as the above;
3. Make sure the indicator light is flashing rapidly and confirm it in app;
4. Choose the local WIFI and enter the correct password and confirm;
5. Wait for configuring successfully, then tap "Done".


B. AP Mode

1. Please change to "AP Mode" if connecting failed in "Easy Mode". The AP Mode is at the upper right corner of the "ADD DEVICE" page. Tap to the icon at the upper right of the page, you are able to modify the device name or even create a group (If you have several device), which means you can turn multiple devices on or off at the same time.
2. Timer
You can set the devices on or off after the specific time as you want with this function.

3. Countdown
With the count down timer feature, you can automatically switches on/off the running household appliances.

4. Statistics

You can check the real-time and historical power consumption here if your device is built with energy monitoring function.




B. Scenes

With this function, you can create your characteristic as you want.

C. Profile

Profile is the entrance for the users to manage personal information, mainly show the following information:

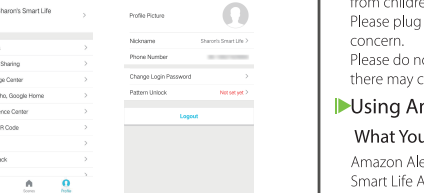

► Safety Information

The device is recommended for use indoors and in a dry location only, power outlet shall be used within it's published outlet rating on the instructions.

Please contact seller for replacement if there is any damage caused by transportation. Please plug in the socket in proper condition and away from children.

Please plug in the socket fully while using for safety concern. Please do not disassemble or install the socket, otherwise there may cause product damaged or security risks.

► Using Amazon Echo Quick Guide

What You'll Need...

Amazon Alexa APP & Account
Smart Life APP & Account

(Users need to register your own account, select region as "The United States")
Echo, Echo Dot, Tap or other Amazon voice operated devices
Mini Smart Socket


Tip: Rename the device after configuring successfully, The name of the device is recommended to use easy pronunciation of the English words.
(Amazon Echo only supports English temporarily)

Set Your Echo Speaker by Alexa APP


1. Sign in with Alexa account & password (If not registered, sign up first); After login, click the menu at the top left, then click "Settings", and choose "Set up a new device";
2. Choose a device (for example, Echo). When the right page appears, long press the small dot on your Echo device until the light turns to yellow. Then click

Enable Our Skill in Alexa APP

1. Choose "Skills" in the options bar, and then search "Smart Life" in the search bar; Select "Smart Life" in the search results, and then click "Enable."
2. Input the user name and password that you had previously registered (Only support the account in the United States); When you see the right page, it means the Alexa account is linked with Smart Life account.



"Continue" on App.
(Note: at this time the mobile phone can not open a variety of VPN software)



Make sure your Echo is plugged into a power outlet. In about a minute, Echo will tell you that it is ready and the light ring will turn orange. Then continue.



3. Choose users' WIFI and wait for a few minutes.
4. After an introduction video, click next step, it will turns to "Home" page automatically. Now the Echo is connected to Alexa APP through WIFI successfully.

Control Smart Socket by Voice
After the previous operation, you can control the socket via Echo.


1. Discovering devices: Firstly, users need to say to Echo: "Echo(or Alexa), Discover my devices."
Echo will start to finding the devices which is added in Smart Life APP, it will take about 20 seconds to show the result. Or you may click "Discover devices" in Alexa APP, it will show the devices that found successfully.

Note: "Echo" is one of the wake-up name, which can be any of these three names (Settings): Alexa/Echo/Amazon.

2. Support Skill List

User can control devices by instructions like below:
Alexa, turn on [fridge socket]
Alexa, turn off [fridge socket]

Attention: The name of the device must be consistent with the addition of Smart Life App.



► Warranty

This Mini socket is covered by a limited warranty from gosund for the original purchaser that covers the product from defects in workmanship and materials for 12 months from the date of purchase (damages through normal wear and tear, alteration, misuse, neglect, accident, service by anyone other than the authorized service center, or act of God are not included).

During the warranty period and upon verification of defects, this product will be replaced when returned with proper proof of purchase.

► Warning Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

To comply with FCC RF exposure compliance requirements, this grant is applicable to only mobile configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

► Contact us

For any inquiries or comments concerning to our products, please do not hesitate to send emails to service@gosund.com, and we will respond to you as soon as possible.

We appreciate your support!

Manufacturer: shenzhen Gosund Technology Co.,Ltd
Address: HuaFengZhiGu Building B,6/F605,YinTian Road BaoAN District , ShenZhen,China
Website: www.gosund.com
Tel: +86-159-8956-0005
Support Email: service@gosund.com

