

Bluetooth phone adapter manual

Features


- ✦ Embedded Audio Gateway profile
- ✦ Plug in existing mobile phone via 2.5 ϕ phone jack
- ✦ User-friendly interface that can be used with Bluetooth enabled headset devices.
- ✦ Support pin-code input in order to pair with various Bluetooth headsets
- ✦ 10 meter working distance

Front panel

1. Digital 0~9 number indicated LEDs^(*)
2. Pin-Code select Key
3. Pair Key (also as Confirm Key)
4. Status LED
5. Power Switch
6. Charger Jack
7. Audio cable

(*)Digital arrangement

①②③④
⑤⑥⑦⑧⑨

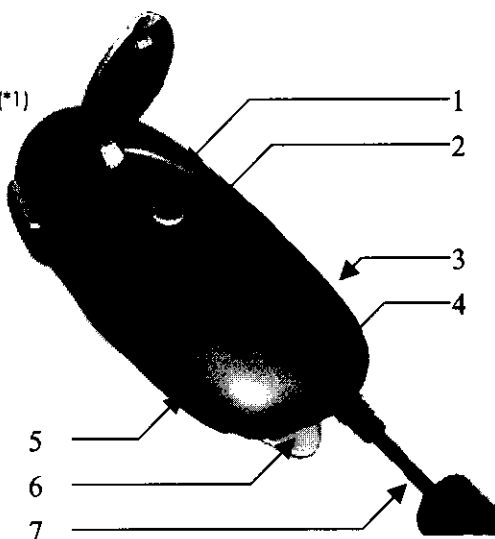

Input Pin-Code

You can input the Pin-Code in advance.

Please power on the device. Press the 'Pin-Code select Key' once.

You will see the digital '0' is flashing. It will change to digital '1' if you press the 'Pin-Code select Key' again. If the number is what you want, you can press the 'Confirm Key' once and the number will not flash.

Please press 'Pin-Code select Key' to select next number you want.
When last number is inputted ok, please press 'Confirm Key' again in order to finish the 'Input Pin-Code' procedure.
If any number is wrong or you want to update the Pin-Code, You must restart the 'Input Pin-Code' procedure again.

Pair with Headset

Please let headset into the pairing mode.
Power on this device (*2) and you will see the Green LED flash every 2 seconds. You can press the 'Pair Key' 3 seconds continually.
You will see the Green and Red LED are flashing alternately.
When pair is finished, the device will enter standby mode. The Green LED is flashing every 2 seconds.

(*2) Only in standby mode, you can do pair procedure.

If you don't sure which state is. You can power off then power on again and wait the green LED flash once per 2 seconds. This is standby mode now.

Connect with mobile phone

Plug audio cable into the headset ready mobile phone.
You can enable the auto answer function in your mobile phone.
It will auto transfer to the Bluetooth headset directly when the call in.
It will auto enter the standby mode for the power saving when ends call. It is like the hand-free in your Bluetooth headset.

Charge

When the Red LED is flashing, please use charger to charge the device.
The red LED will light when charging. And it will be a bit light when full charge. The charging time needs 1.5~2 hours.
You can power off it when charging.

LED status

	Non Battery Low	Battery Low
Standby mode	Green LED flash once/2 sec	Red LED flash once/2 sec
Park mode	Green LED flash once/2 sec	Red LED flash once/2 sec
Talk mode	Green LED flash twice/1 sec	Red LED flash twice/1 sec
Pair mode	Green & Red LED flash alternately	

FCC Statement

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.