


XPV[®] SUPER TERRANATOR™

CONTENTS

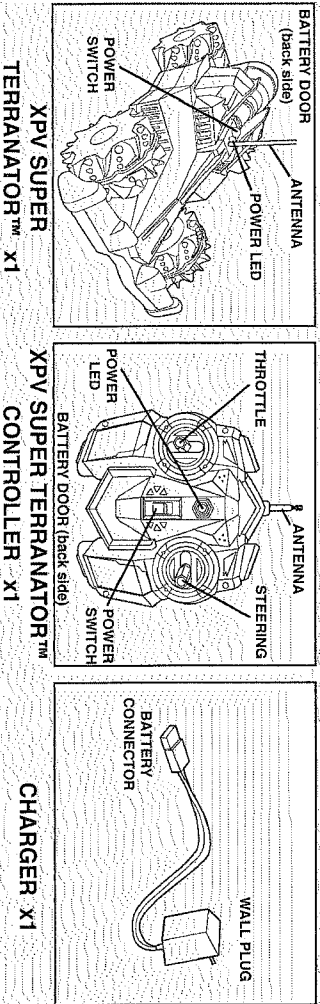

BATTERY INSTALLATION


Only an adult should install and change the batteries.

BATTERY INFORMATION

INCLUDED XPV[®] Nickel Metal Hydride 1.2 volt rechargeable battery pack (non-removable)
REQUIRED 1 - 9 volt battery for controller (not included)


INSTALL 9V ALKALINE BATTERY INTO CONTROLLER

1. Turn off controller.
2. Unscrew and remove battery cover from back of controller.
3. Install 1 - 9 volt alkaline battery into controller as illustrated.
4. Replace and fasten battery cover.



BATTERY CHARGING

1. Turn Off the XPV SUPER TERRANATOR™.
 2. Unscrew battery cover door from vehicle.
 3. Connect the XPV[®] battery pack plug to the XPV[®] vehicle charger plug.
 4. Plug charger into wall outlet.
- Charging time: 2 - 4 hrs.
 Charge indicator LED:
 Green LED ON - XPV[®] Battery Charger is working
 Green LED goes OFF - charging finished
- IMPORTANT:** After charging disconnect the charger from the wall first. Then, disconnect XPV SUPER TERRANATOR™ from XPV[®] charger.
- If the Green LED does not on when connect the charger to the vehicle. Reverse disassembly instruction above. Make sure the power switch on vehicle is push backward at "OFF" position. Read the assembly instruction above for charging.

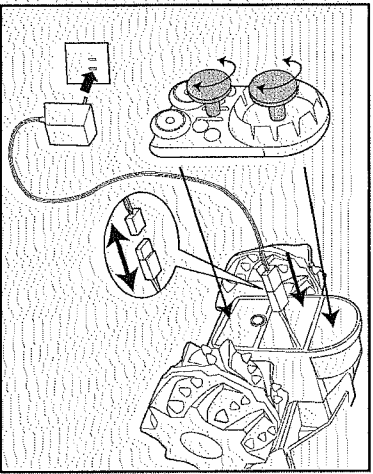


CAUTION: Only use the XPV[®] vehicle charger to charge the battery pack. Other chargers may not provide the proper voltage and could destroy the battery pack.

CAUTION: The adaptor should be periodically examined for conditions that may result in the risk of fire, electric shock, or injury to persons. In the event of such conditions, the charger should not be used until properly repaired.

ANTENNA AND PANEL INSTALLATION


CONTROLLER ANTENNA

1. Carefully screw the antenna into top of controller as illustrated.




VEHICLE ANTENNA

1. Carefully slide the antenna cover over antenna wire as illustrated and insert cover into vehicle body.




BUMPER COVER INSTALLATION

1. Clip the protective cover onto the front bumper. If this comes off during play, simply reattach.



ROLL BAR INSTALLATION

1. These come pre assembled. If they fall off during play simply snap them back onto the body like shown.




VEHICLE CONTROLS AND OPERATION

The XPV SUPER TERRANATOR VEHICLE™ uses a "tank drive" steering control. Unlike conventional steering, this vehicle features two motors that operate each set of wheels independently. This allows you to have greater control over the vehicle and a tighter turning radius.

BASIC OPERATION:

1. Turn power ON to the XPV SUPER TERRANATOR™ controller and vehicle (PUSH POWER SWITCH FORWARD). Power indicating LED's will illuminate.
2. Place XPV SUPER TERRANATOR™ vehicle on ground surface. Use controller to operate vehicle.
3. When finished, always turn power to the vehicle (push power switch backward) OFF first, and then the controller second.

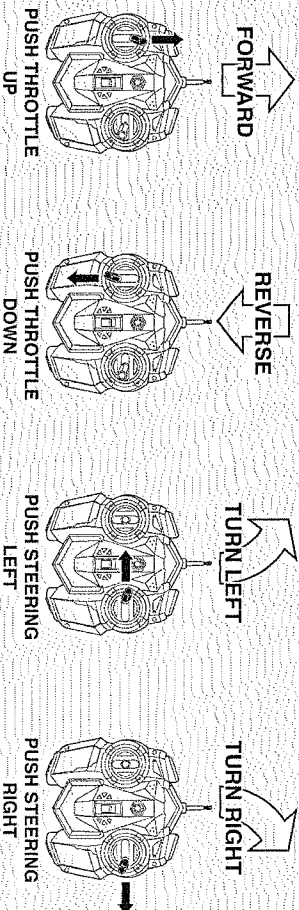

The XPV SUPER TERRANATOR VEHICLE™ is the ultimate "all terrain vehicle!" It features a waterproof design that allows it to handle almost any terrain!



XPV[®] SUPER TERRANATOR[™]

CAUTION - ELECTRICALLY OPERATED PRODUCT

Not recommended for children under 8 years of age. As with all electric products, precautions should be observed during handling and use to reduce the risk of electric shock. Transformer Electric Rating Output: 14.5V DC 600mA-Hr Input: 120V AC 60Hz 24W

8+

WARNING: ADULT SUPERVISION REQUIRED. SEE SAFETY INSTRUCTIONS BELOW.

QUICK TIPS AND TROUBLESHOOTING

1. Check area for possible radio interference, electrical wires, CB radios, and/or other P/C vehicles may cause radio interference and affect operation of XPV SUPER TERRANATOR[™] vehicle. Avoid these objects for maximum performance.
2. Check weather conditions. XPV SUPER TERRANATOR[™] vehicle performs best in mild, sunny days with little or no breeze. If raining, snowing, excessively windy, or temperature is below 32°F/0°C or above 122°F/50°C, XPV SUPER TERRANATOR[™] vehicle may not perform properly.
3. Check batteries. If XPV SUPER TERRANATOR[™] vehicle exhibits diminished or erratic performance, replace controller batteries or recharge XPV[®] Battery Pack as necessary.
4. Check that XPV SUPER TERRANATOR[™] controller antenna is extended and affixed upward.
5. Check that XPV SUPER TERRANATOR[™] vehicle antenna is positioned straight.
6. Check that XPV SUPER TERRANATOR[™] vehicle is fully charged.
7. XPV SUPER TERRANATOR[™] comes in 2 frequencies: 27 MHz and 49 MHz. Make certain that only one XPV SUPER TERRANATOR[™] vehicle at a time with the same radio frequency is powered "ON". Do not operate while other XPV SUPER TERRANATOR[™] vehicles with the same radio frequency are in operation nearby.
8. XPV[™] SUPER TERRANATOR[™] is equipped with a safety shut-off switch in the event of overheating. If the XPV SUPER TERRANATOR[™] is overheating it will shut down for approximately 15 minutes to cool down. This is considered normal. After 15 minutes cooling down you may resume play.
9. Store the XPV SUPER TERRANATOR[™] in room temperature for keeping the max performance.

IMPORTANT SAFETY INFORMATION - ALKALINE BATTERY WARNINGS AND PROPER USE

WARNING: ONLY ADULTS SHOULD INSTALL OR CHANGE BATTERIES!

WARNING: READ BEFORE INSTALLING OR USING BATTERIES. Failure to read and follow these instructions may result in fire, chemical burns, personal injury and/or property damage if batteries are improperly charged or used. Battery acid leakage can cause personal injury and cause damage to the XPV SUPER TERRANATOR[™] VEHICLE and surrounding property. If battery leakage occurs, thoroughly wash any affected skin, making sure to keep battery acid away from eyes, ears, nose and mouth. Immediately wash any clothing or other surface that comes into contact with leaked battery acid. Leaking batteries may make "popping" sounds.

REQUIRED BATTERIES:

Vehicle requires one (1) XPV[®] Battery Pack (non-removable) and one (1) XPV @ Battery Charger (included). Controller requires one (1) 9 volt/6LR61 Alkaline Battery (not included).

TO AVOID BATTERY PROBLEMS:

- NEVER mix old and new batteries or different brands of batteries.
- NEVER mix alkaline, standard (carbon-zinc) and rechargeable (nickel-cadmium) batteries.
- NEVER use rechargeable batteries as product performance may be diminished. For longer life, only use alkaline batteries.
- NEVER charge non-rechargeable batteries.
- NEVER dispose of batteries in the area as they may leak and explode.
- NEVER disassemble, modify, or attempt to short circuit the battery compartment.
- NEVER leave batteries in the XPV SUPER TERRANATOR[™] Controller for long periods (a week or more) of non-use.
- NEVER leave the XPV SUPER TERRANATOR[™] Controller on when the batteries have lost their charge.
- NEVER put batteries in backyards by placing the negative (-) battery pole into the positive (+) receiver slot.
- ALWAYS have an adult install and change the batteries.
- ALWAYS insert batteries according to the instructions.
- ALWAYS turn off the product when not in use.
- ALWAYS replace all batteries at the same time.

NICKEL METAL HYDRIDE (NiMH) BATTERY PACK SAFETY INFORMATION

WARNING! ONLY ADULTS SHOULD CHARGE BATTERY PACK AFTER READING ALL INSTRUCTIONS AND WARNINGS. The user assumes all risks associated with the use and charging of NiMH batteries. If you do not agree with these conditions, return the XPV SUPER TERRANATOR[™] vehicle and charger prior to use.

Technical Specifications
Type: Nickel Metal Hydride (NiMH)
Voltage: 1.2V DC
Charge time: 2 - 4 hrs.

Warnings and Cautions

- **WARNING:** Handle Battery Pack and Battery Charger with extreme care!
- Only charge Battery Pack with the compatible Battery Charger from Battery Pack Manufacturer!
- NEVER cut or remove Battery Pack wires!
- NEVER disassemble, modify, or solder Battery Pack!
- NEVER leave Battery Pack unattended at any time while being charged!
- NEVER handle Battery Pack while wearing metallic objects such as a ring, watch, or bracelet!
- NEVER immerse Battery Pack in water, seawater or other liquids.
- NEVER immerse Battery Pack in water, seawater or other liquids.
- NEVER handle or recharge Battery Pack until it has cooled to surrounding temperature.
- NEVER charge Battery Pack on or near combustible materials including paper, plastic, wood, carpet, vinyl, leather, wood, or automobiles.
- NEVER overcharge Battery Pack.
- NEVER leave Battery Pack near heat source such as fire or oven.
- NEVER connect Battery Pack to an electrical outlet.
- NEVER use or recharge Battery Pack if it appears damaged, cracked, becomes discolored or deformed, gives off an odor, or otherwise appears abnormal.
- NEVER strike or throw Battery Pack against a hard surface.
- NEVER puncture or cut Battery Pack.

Storage and Transportation

- ALWAYS store Battery Pack in a secure, dry, ventilated location.
- ALWAYS store Battery Pack where it cannot be handled by children.
- NEVER allow Battery Pack to come into contact with water or other liquid.
- NEVER leave Battery Pack near flames, stoves, fireplaces, or other high-temperature locations.
- NEVER expose Battery Pack to direct sunlight for extended periods.
- NEVER transport or store Battery Pack where it can come into contact with metal objects.

Recommended Temperature Ranges for Battery

- Storage: 40°F / 4°C and 80°F / 27°C.
- Charging: 50°F / 10°C to 113°F / 45°C.
- Usage: Recommended temperature range during use: 32°F / 0°C to 122°F / 50°C.
- Transporting in a vehicle: 20°F / -6°C and 130°F / 55°C.
- Charging and/or operating of Battery Pack outside of its specified range can reduce battery performance and cause the battery to leak, overheat, or explode.

Battery Pack Disposal

Battery Pack should be properly disposed of or recycled according to local, state, and federal regulations and only after being cooled to surrounding temperatures. To dispose or recycle, insulate the output wires with tape, puncture a plastic garbage bag, insert Battery Pack into the garbage bag, immerse garbage bag containing Battery Pack into salt water for several hours, and dispose or recycle accordingly. Wear rubber gloves during procedure.

JAKKS Pacific, Inc. is not responsible in any way for any bodily injury(s) and/or property damage that may occur from any contrary use in any way of Battery Pack and/or Battery Charger offered and/or distributed by JAKKS Pacific, Inc.

ADDITIONAL INFORMATION FOR ALL BATTERY PRODUCTS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference.
- 2) This device must accept any interference received, including interference that may cause operation to cease.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not properly installed and used, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to a different power outlet.
- Consult the dealer or an experienced radio/TV technician for help.

TM & ©2007 JAKKS Pacific Inc., Malibu, CA 90265 U.S.A. All rights reserved.

Printed in
China

Contents may vary in style, color, shape and decoration from images shown on package or in advertisements. Questions or comments? www.jakksacific.com consumers@jakks.com, or 1-877-552-2557 in North America.

Visit www.XPV.com for additional information, instructions, and cool videos!