

Owner's Manual

Outdoor Fireplace

MODEL: 36-005RF

Transmitter: FCC ID: ELY547-47-1010T IC 1492A-471010T
Receiver: FCC ID: ELY547-36-005RF IC 1492A-36005RF

REMOTE CONTROL



The remote control has a range of approximately 50 ft. (15.25m). It does not have to be pointed at the fireplace and can pass through most obstacles (including walls). It is supplied with 2187 independent frequencies to prevent interference with other units.

BATTERY INSTALLATION

1. Depress tab on the battery cover on the back of the remote transmitter and remove battery cover.
2. Install a 12V alkaline battery into the remote control.
3. Replace the battery cover.


REMOTE CONTROL FUNCTION

Press the ON/OFF button to turn the Flame and Light On/Off.


NOTE

There is no function for the Remote Control when the Main Switch on the Switch Board is OFF.


RECEIVER MAIN BOARD

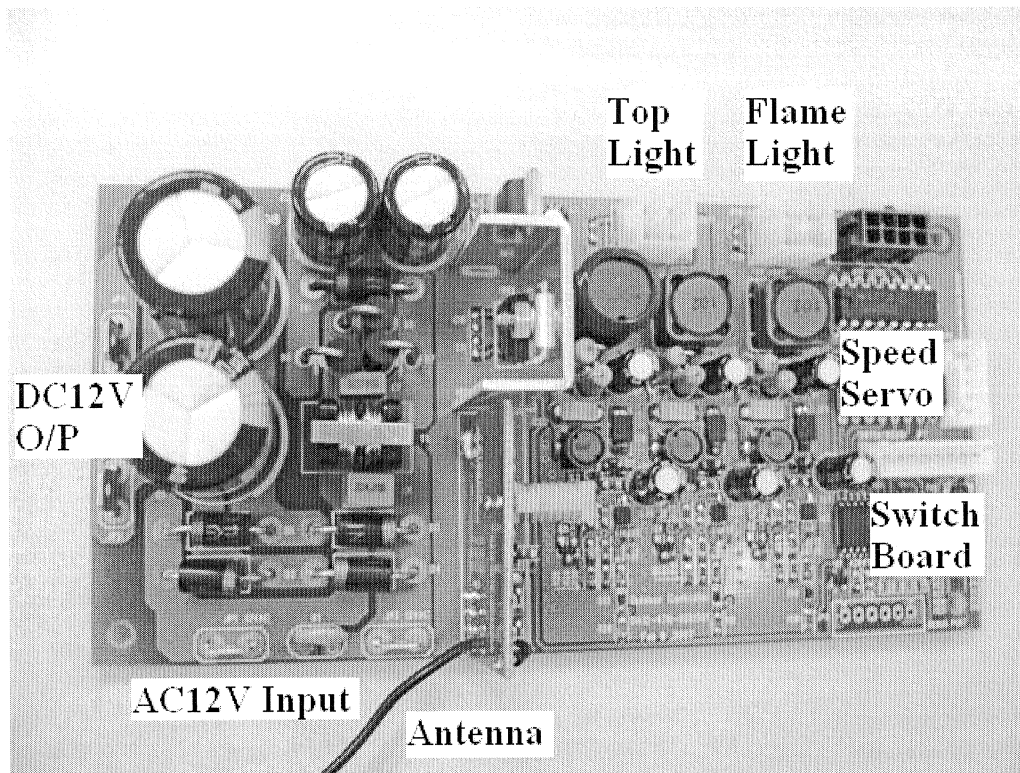

AUDIO BOARD

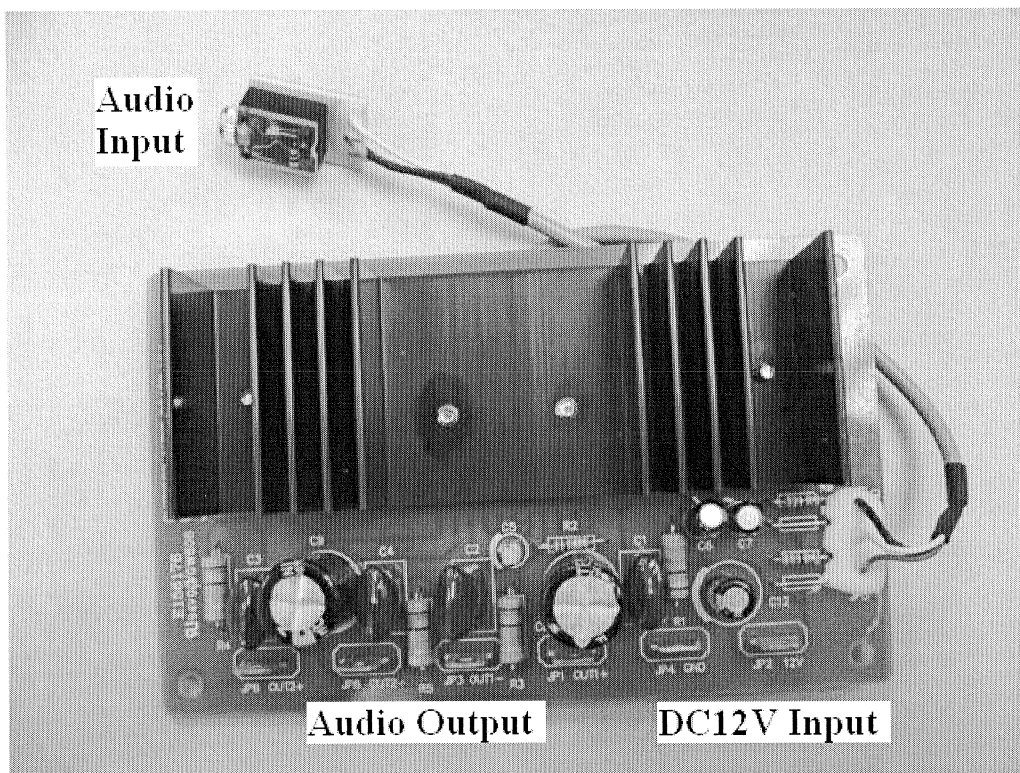

SWITCH BOARD

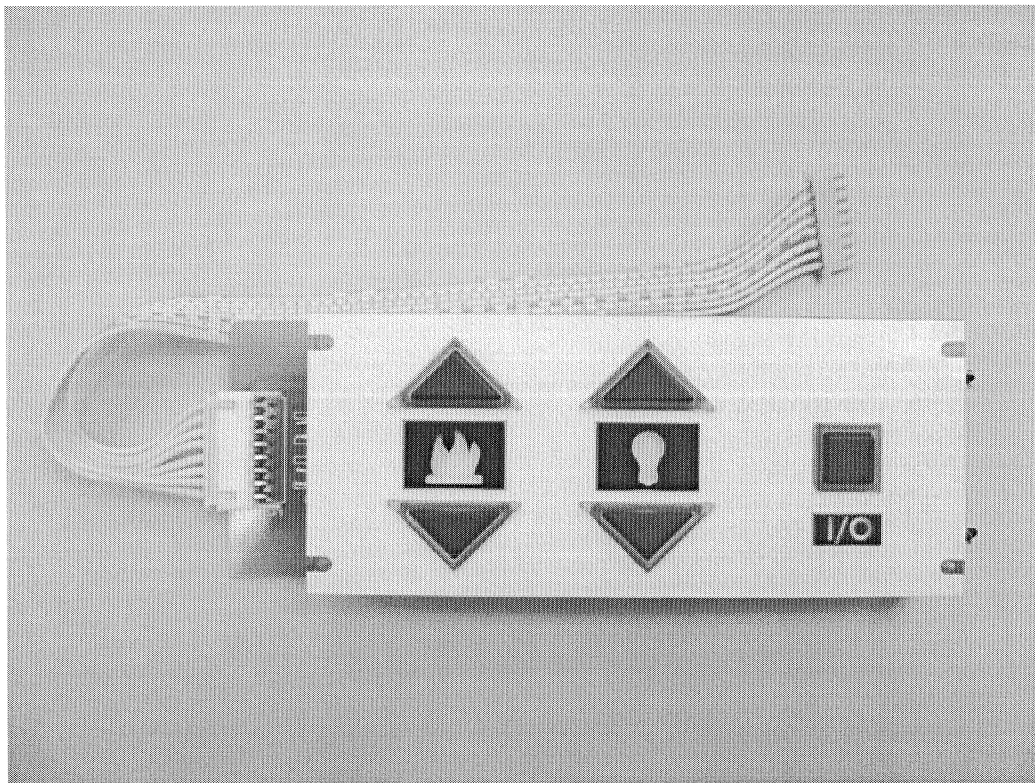


1. Locate and connect the correct the input and output terminals to the correct terminals.



MAIN SWITCH

- Press the Main Switch to turn ON/OFF the Flame and the Light.



TOP LIGHT CONTROL

- Press the Up or Down direction button to increase or decrease the Light Intensity.



FLAME CONTROL

- Press the Up or Down direction button to increase or decrease the Flame speed.

WARNING

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Specifications

1. Input voltage	12VAC+/-10%, 60Hz
2. Output voltage (for audio supply voltage)	DC12V+/-10%
3. Output current	
Regulator #1	700mA+/-50mA
Regulator #2	300mA+/-30mA
Regulator #3	300mA+/-30mA
4. Operating Temperature	0~40 C
5. Storage Temperature	-25~+60 C