

Info

Number	801604A Application / 007	Author	Alastair Malarky
Date	2011 02 18		
To	Nemko Canada Inc		

TDMA Transponder Family – Mounting Instructions


The mounting instructions for all vehicle mount models are as per follows.

CVO Pre-trip Inspection *Transponder Mounting Instructions*

for car interior on windshield

For proper operation, make sure the transponder is mounted as follows:

1. Refer to Fig.-1 for mounting orientation required.
2. For optimum visibility and performance mount your transponder at the location shown in Fig.2
3. Alternate mounting locations must be within area shown in Fig.-3
4. Having determined the mounting position in your vehicle, clean the inside surface of that section of the windshield if necessary. Now carefully remove the protective backing from the Dual Lock[®] mounting strips on the rear of the transponder as shown in Fig. 4 and firmly press the rear of the transponder against the glass. Maintain the pressure for about 15 seconds to achieve a good bond.

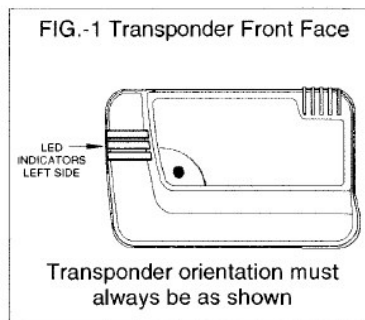

The transponder may be removed by lifting any one corner with sufficient pressure to separate the Dual Lock[®] strips. Do not remove the Dual Lock[®] from the windshield and reuse it; obtain new strips from your service center if necessary.

