

RESONANCE

Clock Speaker

Model: CIR600

User Manual

Thank you for selecting the Oregon Scientific™ **RESONANCE** Clock Speaker (CIR600).


NOTE Please keep this manual handy as you use your new product. It contains practical step-by-step instructions, as well as technical specifications and warning you should know about.

PACKAGE CONTENTS

- Main unit x 1
- CR2025 battery x 1
- AC/DC Power adapter x 1
- User manual x 1

OVERVIEW


MAIN UNIT



EN

1. Volume up; Increase a value in setting mode.
2. Volume down; Decrease a value in setting mode;
3. Set the alarm; Activate/Cancel the alarm;
4. Activate Bluetooth pairing mode; Toggle between Bluetooth and Aux in audio mode.
5. Toggle display mode between time and calendar; Set the time/calendar.
6. **SNOOZE** Snooze the alarm; Dimmer
7. **DC 12 V, 2.0 A** jack Connect AC/DC adapter.
8. **5 V, 1A USB** port Charge smart device;
9. **Aux in** Connect to external audio source.
10. **RESET** Returns all settings to factory defaults.
11. Battery compartment: for back-up power source.

LCD DISPLAY

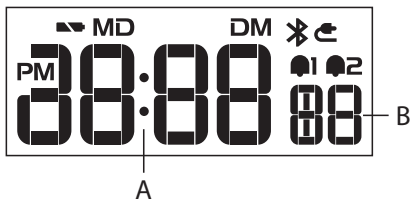


- A. Time / Calendar display.
B. Second / Weekday display.

Symbol	Description
	Low battery indicator
	Alarm indicator
	Bluetooth icon
	Aux in



POWER YOUR CLOCK

INSTALL BATTERY

The device comes with a back-up battery installed. Remove the plastic tab before using the clock. Replace the battery when  displays.

1. Screw off the battery compartment cover.
2. Insert a new CR2025 3 V battery, positive (+) side up, and replace the battery compartment cover.
3. Press **RESET**.

NOTE

- Keep button-cell battery away from children. Swallowing a button-cell battery can be fatal.

CONNECT POWER ADAPTER

Connect the supplied AC/DC power adapter to the **DC 12 V, 2.0 A** jack on the rear of the unit and plug into a standard outlet.

NOTE

- The battery is only for back-up use. Always connect the unit to the power grid source via power adapter.
- When the clock is connected to AC power source, it can charge your smart device via the USB port.
- Make sure the adapter is not obstructed and is easily accessible to the unit.
- To completely disconnect from power, unplug adapter from the mains.







SET THE CLOCK TIME

1. Press and hold **M** for 3 seconds to enter the clock time setting mode.
 2. Press **+** or **-** repeatedly to adjust settings; press and hold **+** or **-** to quickly setting.
 3. Press **M** to confirm and go to the next setting.
- The setting order is 12/24 hour format > Hour > Minute > Year > Calendar format (MD/DM) > Month > Day > Weekday language.

- Complete each step with 60 seconds or the device will exit the clock setting mode.
- The language options are English (**EN**), German (**GER**), French (**FR**), Italian (**IT**) and Spanish (**SP**).






ALARM

SETTING THE ALARMS

1. Press and hold  for 2 seconds to enter alarm setting mode. The time digits flash.
2. Press  or  repeatedly to adjust settings; press and hold  or  to quickly setting.
3. Press  to confirm and go to the next setting.

ACTIVATING / DEACTIVATING THE ALARM

Press  accordingly for desired option:


Time pressing 	Alarm on/off	Operation
1	Alarm 1  1 on	Set Alarm 1
2	Alarm 2  2 on	Set Alarm 2
3	Both alarms  1  2 on	Set Alarm 1 and 2
4	Both alarms off	Turn off Alarm 1 and 2

Press  and  together to review Alarm 1 time.

Press  and  together to review alarm 2 time.



SNOOZE / STOP THE ALARM

- Press **SNOOZE** to stop the alarm for 8 minutes. The alarm indicator will flash.
- Press  to cancel snooze function during snooze status.
- When the alarm sounds, press any key except **SNOOZE** to stop the alarm. The alarm will reactivate the next scheduled alarm time unless deactivated.

DIMMER



Turn off all the alarms, press **SNOOZE** to adjust the backlight:

normal → mid → dim →




BLUETOOTH PAIRING








1. Turn on Bluetooth on your smart device.
2. Open the Bluetooth pairing list on your smart device and select to connect CIR600. The Bluetooth icon displays steady.
3. If pairing failure, press and hold  on the unit for 2 seconds to enter the Bluetooth pairing mode. The Bluetooth icon  flashes and re-pair.

NOTE

- If the unit is not connected to a device within 5 minutes, the Bluetooth  will automatically turn off.
- To disconnect the unit from your smart device, disconnect it in the Bluetooth menu of your device.
- Bluetooth wireless technology operates within 10 meters (33 ft) range and varies if there are physical obstacles, such as a thick wall in between your smart device and CIR600.

LISTEN TO THE MUSIC

1. Press  to select BT or Aux in music.
 2. Press  or  to control sound volume, max volume is 16.
 3. Press and hold  for 3 seconds to mute, volume is 0.
- 

LISTEN TO AN EXTERNAL AUDIO SOURCE

1. Use a 1/8 (3.5 mm) audio cable (not supplied) to connect the audio source's headphone jack to the **Aux in** jack on your unit.
2. Press **⏻** to enter AUX IN mode.
3. Use the controls on your connected device to play.

SPECIFICATIONS

Input power	12 V, 2.0 A AC/DC power adapter
Output power	2 x 10 W RMS
USB charging output port	5 V, 1 A
Battery	CR2025 (for back-up source)
Bluetooth	Version 4.0
L x W x H	200 x 89 x 72.9 mm (7.9 x 3.5 x 2.9 in)
Weight	628g (1.4 lb)

PRECAUTIONS

- Use only fresh battery of the required size and type.
- Do not dispose old batteries as unsorted municipal waste. Collection of such waste separately for special treatment is necessary.
- If you do not plan to use the unit for a long time, remove the battery. Battery can leak chemicals that can damage electronic parts.
- Do not subject the device to excessive force, shock, dust, temperature or humidity.
- Do not immerse the device in water. If you spill liquid over it, dry it immediately with a soft, lint-free cloth.
- Do not clean the device with abrasive or corrosive materials.
- Do not tamper with the device's internal components. Doing so invalidates the warranty.
- Images shown in this manual may differ from the actual display.

- When disposing of this product, ensure it is collected separately for special treatment.
- The contents of this manual may not be reproduced without the permission of the manufacturer.

NOTE The technical specifications for this product and the contents of the user manual are subject to change without notice.

NOTE Features and accessories will not be available in all countries. For more information, please contact your local retailer. To download an electronic version of the user manual, please visit <http://global.oregonscientific.com/customerSupport.php>.

ABOUT OREGON SCIENTIFIC

Visit our website www.oregonscientific.com to learn more about Oregon Scientific products.

For any inquiry, please contact our Customer Services at info@oregonscientific.com.



Oregon Scientific Global Distribution Limited reserves the right to interpret and construe any contents, terms and provisions in this user manual and to amend it, at its sole discretion, at any time without prior notice. To the extent that there is any inconsistency between the English version and any other language versions, the English version shall prevail.

EU-DECLARATION OF CONFORMITY

Hereby the manufacturer, IDT Technology Limited, declares that the radio equipment type **RESONANCE** Clock Speaker (Model: CIR600) is in compliance with 2014/53/EU Directive. The full text of the EU Declaration of Conformity is available at the following internet address: www.oregonscientific.com.



COUNTRIES RED APPROVED COMPLIED

All EU countries, Switzerland 
and Norway 

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

WARNING Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

DECLARATION OF CONFORMITY

The following information is not to be used as contact for support or sales. Please call our customer service number (listed on our website at www.oregonscientific.com), or on the warranty card for this product) for all inquiries instead.

We

Name: Oregon Scientific, Inc.
Address: Brea Corporate Park
3020 Saturn St. Suite 200
Brea, CA 92821
Telephone No.: 1-800-853-8883



EN

declare that the product

Product No. CIR600
Product Name: **RESONANCE** Clock Speaker
Manufacturer: IDT Technology Limited
Address: Block C, 9/F, Kaiser Estate,
Phase 1, 41 Man Yue St.,
Hung Hom, Kowloon,
Hong Kong

INFORMATION FOR USERS




Pursuant to and in accordance with Article 14 of the Directive 2012/19/EU of the European Parliament on waste electrical and electronic equipment (WEEE), and pursuant to and in accordance with Article 20 of the Directive 2013/56/EU of the European Parliament on batteries and accumulators and waste batteries.

The barred symbol of the rubbish bin shown on the equipment indicates that, at the end of its useful life, the product must be collected separately from other waste.

Please note that the batteries/rechargeable batteries must be removed from the equipment before it is given as waste. To remove the batteries/accumulators refer to the specifications in the user manual. Therefore, any products that have reached the end of their useful life must be given to waste disposal centers specializing in separate collection of waste electrical and electronic equipment, or given back to the dealer when purchasing a new WEEE, pursuant to and in accordance with Article 14 as implemented in the country.

The adequate separate collection for the subsequent start-up of the equipment sent to be recycled, treated and disposal of in an environmentally compatible way contributes to preventing possible negative effects on the environment and health and optimizes the recycling and reuse of components making up the apparatus. Abusive disposal of the product by the user involves application of the administrative sanctions according to the laws in force.



EN

WARNING

Do not ingest the battery, Chemical Burn Hazard(The remote control supplied with) This product contains a coin/button cell battery. if the coin/button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.

Keep new and used batteries away from children.

If the battery compartment does not close securely, stop using the product and keep it away from children.

If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

