page 1 of 2



Kenmore PRO 36-Inch Self-Clean Dual-Fuel Range

22-79623 - Stainless

- The best of both cooking worlds—gas on top and electric in the oven!
- True convection cooking with third element
- 6.4 cu. ft. self-clean oven with true hidden, 8-pass bake element
- · Seven sealed burners on a recessed gas-thru-glass cooktop
- Three heavy-duty integrated handle oven racks
- Dishwasher-safe, porcelain-coated cast-iron continuous matte grates
- 27,000 BTU power bridge burner with three 9,000 BTU burners, one 18,000 BTU 5-point power burner, one 16,200 BTU triple burner and two 9,500 BTU 5-point all-purpose burners
- Food temperature probe
- · Professional analog temperature gauge

Model	22-79623	
Overall	Stainless	
Console	Stainless	
Knobs	Stainless Look	
Door / Drawer	Stainless	
Sides	Stainless	
Handle	Stainless	
Surface	Black	
Matte Grates	Black	

Selection	
Stainless	22-79623
Oven Features	6.4 cu. ft.
Cleaning System	Self-Clean
	with Advanced Analog
Electronic Oven Controls	Temp. Gauges
Control Lockout	Oven
Cook & Hold Warm Oven	•
Sabbath Mode†	•
	Third Element,
Convection Oven	Variable Speed
Variable Broiling System	400°-550°
Total Adjustable Oven Racks	3
Integrated Handle Racks	3 Heavy-Duty
Searing Grill and Roasting Rack	•
Broiler Pan and Grill	•
Oven Lights	Dual Halogen
Removable Door	Stainless
Window	X-Large
Oven Interior WxHxD (In.)	30 ¹ / ₈ x 18 ³ / ₄ x 19 ⁵ / ₈
Cooktop Features	Sealed
Power Bridge Burner (BTU)	1 @ 27,000
	1 @ 18,000
Power Burner (BTU)	1 @ 16,200
All-Purpose Burner (BTU)	2 @ 9,500
Simmer Burner (BTU)	Simmer Plate
Griddle or Wok Accessory	Griddle
Grate Styling	Continuous, 5 Point Matte
Porcelain-Coated Cast-Iron Grates	•
Dishwasher-Safe Grates and Knobs	•
	Recessed
Cooktop Surface	Gas-Thru-Glass
Valves (Degree of Turn)	270
General Features	
Electronic Ignition	•
Convertible to LP*	Kit Included
Power Rating (kW) @ 240V / 208V	5.5 / 4.1
Bake / Broil @ 240V (Watts)	3,000 / 4,000
Breaker / Copper Wire Size (240V)	40 / 8
Shipping Weight (Approx. Lbs.)	410
Accessories	
Gas Connector Required –	
Stainless Steel; 60" Length, 1/2" I.D.	26-49694
Range Cord Required	•
Varranty	
1-Year Limited Warranty –	
Entire Appliance	Parts & Labor
2-5 Year Limited Warranty –	


If used for other than private family purposes, warranty applies for only 90 days.

*LP orifices included; conversion must be done by qualified LP installer †Sabbath Mode overrides auto oven shutoff







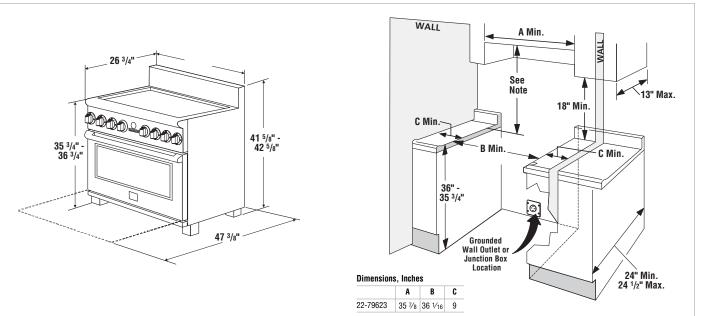


The gas line is located in the lower right corner when looking at the back of the range or the lower left corner when looking at the front of the range.

Do not pinch the power supply cord between the range and the wall. Do not seal the range to the side cabinets.

NOTE: 28" minimum clearance between the cooktop and the bottom of the cabinet when the bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" stainless steel, 0.024" aluminum, or 0.020" copper. 34" minimum clearance when the cabinet is unprotected.


KENMORE PRO RANGE ACCESSORIES (Optional) Call Sears Parts at 1-866-732-7728.	36-Inch 22-79623
12" Stainless Backguard	22-628-318353008
9" Stainless Backguard	22-628-318353007
Island Trim Kit	22-628-318353006
Stainless Kick Plate	22-628-318352650
Simmer Plate	22-628-318254206
Wok Ring	22-628-318254305
Spanish Control Knobs (Order Both)	22-628-318353212 22-628-318353213
French Control Knobs (Order Both)	22-628-318353210 22-628-318353211











Rev. 1