



Handheld Terminal

BT-A700 Series

Instruction Manual

Be sure to read this instruction manual carefully prior to operating this product. After reading, keep this manual in a safe place so that you can refer to it at any time.

In this instruction manual, BT-A700 Series means the BT-A700/A700G/A700GM/A700GA.

Symbols

The following symbols alert you to important messages. Be sure to read these messages carefully.

⚠ DANGER	It indicates a hazardous situation which, if not avoided, will result in death or serious injury.
MARNING	It indicates a hazardous situation which, if not avoided, could result in death or serious injury. $ \\$
A CAUTION	It indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.
NOTICE	It indicates a situation which, if not avoided, could result in product damage as well as property damage.



It indicates cautions and limitations that must be followed during operation.



It indicates additional information on proper operation.



It indicates tips for better understanding or useful information.

- IEEE802.11a/b/g/n/ac: Wireless LAN standards established by 802 committee which has designed standards of LAN technology in IEEE (Institute of Electrical and Electronics Engineers).
- Bluetooth[®] wordmark and logo belong to Bluetooth SIG, Inc. and KEYENCE uses them under license. Other trademarks or trade names belong to each owner.
- microSD, SDHC and SDXC are a trademark of SD Association.
- Other company names or product names described in this manual are registered trademarks or trademarks of each company.
- It is prohibited to use or copy all or any part of this manual without prior approval.
- The information contained in this manual is subject to change without notice.
- Android is a trademark of Google LLC.
- Gorilla Glass is a trademark of Corning Incorporated.
- Qualcomm is a trademark of Qualcomm Incorporated, registered in the U.S. and other countries.
- Software information

This product incorporates the software files developed independently by or for Keyence Corporation, software files owned and licensed by a third party, and software files subject to certain open source license agreements.

The open source software files are subject to the notices and additional terms and conditions.

For information about such open source software files, please refer to the information displayed on the following screen.

Home → [Settings] → [System] → [About phone] → [Legal information]
Such open source software files are provided on an "AS IS" basis to the maximum extent permitted by applicable law.

If there is any discrepancy between the terms and conditions of the applicable open source license agreement and the "License", the terms and conditions of the applicable open source license agreement prevail with respect to the applicable open source software.

You may obtain a copy of the source code corresponding to the binaries for GPL/LGPL-licensed file by sending a request to Keyence customer service at "soft-license@keyence.co.jp". There will be a charge to cover the costs of providing the source code.

Safety Precautions on Laser Product

The BT-A700 Series uses a visible semiconductor laser as a light source. Follow the instructions mentioned in this manual. Otherwise, injury to the human body (eyes and skin) may result.

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

 Do not disassemble this product. Laser emission from this product is not automatically stopped when it is disassembled.

Class 2 Laser Product

- Do not stare into the direct or specularly reflected beam.
- Do not direct the beam at other people or into areas where other people unconnected with the laser work might be present.
- Be careful of the path of the laser beam. If there is a possibility that the operator may be exposed to the specular or diffuse reflections, block the beam by installing a protective enclosure.
- Install this product so that the path of the laser beam is not as the same height as that of human eye.
- BT-A700GA only


⚠ WARNING

Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007

The BT-A700 Seriesis classified as below in accordance with IEC60825-1.

Item	BT-A700/A700G/A700GM	BT-A700GA
Wavelength	650 nm	650 nm
Output	1.0 mW	1.0 mW
Laser class	Class 2 laser product (IEC 60825-1)	Class 2 laser product (IEC60825-1, FDA(CDRH) Part 1040.10*) * The laser classification for FDA(CDRH) is implemented based on IEC60825-1 in accordance with the requirements of Laser Notice No.50.

Locations of warning/explanation labels



Warning/explanation label

BT-A700/A700G/A700GM



BT-A700GA



Safety Precautions on LED Product

The degree of risk of this product is shown below.

- Risk Group 1
 - * LED product is classified as shown below according to IEC 62471.

Exempt Group Does not pose any photobiological hazard
 Risk Group 1 (Low-Risk) Does not pose a hazard due to normal behavioral

limitations on exposure.

Risk Group 2 (Moderate-Risk)

Does not pose a hazard due to the aversion response to

very bright light sources or due to thermal discomfort.

· Risk Group 3 (High-Risk) May pose a hazard even for momentary or brief

exposure.

Follow the instructions mentioned in this manual. Otherwise, injury to the human body (eyes and skin) may result.

A CAUTION

1

Do not stare at operating LED. May be harmful to the eyes.

Safety Precautions

General cautions

- Do not use this product for the purpose of protecting a human body or a part of human body.
- This product is not intended for use as an explosion-proof product. Do not use this product in a hazardous location and/or potentially explosive atmosphere.

⚠ DANGER

Do not use this product in an application that may cause death, serious injury or serious property damage due to a failure with this product should occur, such as nuclear power plants, on aircraft, trains, ships, or vehicles, used within medical equipment, playground equipment, roller coasters and other rides, etc.



 If the equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.



- Be sure to check that this product performs properly before starting the work or operation.
- If this product malfunctions, take adequate safety precautions to prevent various types of damage.
- Do not use this product in a manner not specified herein. It may result in fire, electric shock or malfunction.

NOTICE

- Do not modify this product or use it in any way other than described in the specifications. Otherwise, the functions and performance cannot be guaranteed.
- The LCD panel may generate microscopic spots (black/bright spot), uneven brightness or crosstalk (phenomenon that non-existent lines or patterns are displayed), depending on the conditions.
- If the same display remains on the screen for a long time, afterimage may occur due to the characteristics of LCD.

Precautions when using the rechargeable battery pack (BT-AB1)

⚠ WARNING

Using batteries other than BT-AB1 may cause fire or explosion. Be sure to use the specified battery.



- Never use the rechargeable battery pack with devices other than those specified. If used with devices of which using conditions are different, the rechargeable battery pack may deteriorate earlier than expected or the devices may be damaged.
- Use an AC power supply cord that coincides the shape of plug used in each country. Also, check that the cord is compliant with regulations and standards in each country.

Recycling the battery

Disposal methods of lithium ion battery differ among countries and regions. Follow the instructions in your area.

When disposing of lithium ion batteries, remaining capacity may cause heat generation, explosion or fire due to contact with other metals. Be sure to cover the positive and negative terminals with adhesive insulation tape.

■ Handling of BT-A700 Series

- Use or store this product within the temperature range described in "Specifications" (5 page). Do not leave the product inside a closed car or at a place exposed to direct sunlight. Doing so may damage the unit or change its reading performance.
- Use within the humidity range described in "Specifications" (5 page). Do not use the product at locations where condensation occurs due to the rapid temperature change. Doing so may damage the unit or change its reading performance.
- This is a precision instrument. Dropping this product or subjecting it to shock may cause damage. Be careful when carrying or using this unit.
- Do not place the BT-A700 Series in a location with high humidity or a dusty area. Doing so may damage the unit or change its reading performance.
- Please select a model that matches the country in which it will be used.

For details, contact your nearest KEYENCE sales professional.

■ Handling of BT-A700 Series main units

NOTICE

NOTICE

Do not insert a sharp object such as a needle into the buzzer hole on the back side of the BT-A700 Series. The tarpaulin may be damaged.

Precautions on regulations and Standards

■ Precautions on wireless LAN



Remove the main battery of the BT-A700 Series near locations where using wireless devices is banned at medical institutions or near electric devices for medical purposes. Carry and use the product away from an implanted cardiac pacemaker.



- The BT-A700/A700G/A700GM/A700GA uses the radio waves of the 5 GHz band. BT-A700 can use the 5.2 GHz band (W52: 36, 40, 44, 48 ch), 5.3 GHz band (W53: 52, 56, 60, 64 ch), and 5.6 GHz band (W56: 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140 ch). The BT-A700G can use the 5.2 GHz band (W52: 36, 40, 44, 48 ch) and 5.3 GHz band (W53: 52, 56, 60, 64 ch). The BT-A700GM can use the 5.2 GHz band (W52: 36, 40, 44, 48 ch), 5.3 GHz band (W53: 52, 56, 60, 64 ch), and 5.6 GHz band (W56: 100, 104, 108, 112, 116, 120, 124, 128 ch). The BT-A700GA can use the 5.2 GHz band (W52: 36, 40, 44, 48 ch), 5.3 GHz (W56: 36, 40, 44, 48 ch), 5.3 GHz (W53: 52, 56, 60, 64 ch), 5.6 GHz (W56: 100, 104, 108, 112, 116, 132, 136, 140 ch) and 5.8 GHz (W58: 149, 153, 157, 161, 165ch). Using 5.2 GHz band (W52) and 5.3 GHz band (W53) outdoors is prohibited by RadioAct.
- Depending on the environment, communication may be impossible.
 Check the communication availability before using.
- If this product is used near devices with the same frequency band, such as a wireless LAN device, microwave oven, heating equipment for industrial use, high-frequency equipment for medical use, etc., radio wave interference may occur and the communication speed will become slow or communication may become impossible.
- If a wireless LAN and Bluetooth are used at the same time, radio wave interference may occur and the communication speed will become slow or communication may be interrupted. If there is communication failure, stop using either the wireless LAN or Bluetooth
- Communication may be impossible at locations near metallic objects, locations surrounded with metallic walls or where there is a lot of metallic powder.
- With the frequency band for this unit, premise radio stations (license required), specified low power radio stations (license not required) and amateur radio stations (license required) for identifying mobile objects used for industrial, scientific and medical equipment or factory production lines are operating.
 - Before using this unit, be sure to check that premise radio stations, specified low power radio stations and amateur radio stations for identifying mobile objects are not operating in the vicinity.
 - If radio wave interference occurs from the this unit against premise radio stations for identifying mobile objects, change the usable frequency immediately or stop the electric wave generation, and then contact the below phone number in regard to taking necessary measures (e.g. setting a partition) to avoid interference.

[Thai] BT-A700G only

This telecommunication equipment is in compliance with NBTC requirements.

[Singapore] BT-A700G/A700GM only This telecommunication equipment is in compliance with the regulation requirement for Singapore.

Complies with IMDA Standards DA104049

■ Precautions on Bluetooth



Remove the main battery of the BT-A700 Series near locations where using wireless devices is banned at medical institutions or near electric devices for medical purposes. Carry and use the product away from an implanted cardiac pacemaker.



- Depending on the environment, communication may be impossible.

 Before starting actual operation, he sure to test the operation.
- Before starting actual operation, be sure to test the operation.

 If this product is used near devices with the same frequency band, such as a wireless LAN device, microwave oven, heating equipment for industrial use, high-frequency equipment for medical use, etc., radio wave interference may occur and the communication speed will become slow or communication may become impossible.
- If a wireless LAN and Bluetooth are used at the same time, radio wave interference may occur and the communication speed will become slow or communication may be interrupted. If there is communication failure, stop using either the wireless LAN or Bluetooth.
- Communication may be impossible at locations near metallic objects, locations surrounded with metallic walls or where there is a lot of metallic powder.
- Possible communication distance is approx. 10 m of vision, however, even within 10 m, communication may become impossible depending on the environment. Check the communication availability before using.
- with the frequency band for this unit, premise radio stations (license required), specified low power radio stations (license not required) and amateur radio stations (license required) for identifying mobile objects used for industrial, scientific and medical equipment or factory production lines are operating.
 - Before using this unit, be sure to check that premise radio stations, specified low power radio stations and amateur radio stations for identifying mobile objects are not operating in the vicinity.
 - If radio wave interference occurs from the this unit against premise radio stations for identifying mobile objects, change the usable frequency immediately or stop the electric wave generation, and then contact the below phone number in regard to taking necessary measures (e.g. setting a partition) to avoid interference.

[Thai] BT-A700G only

This telecommunication equipment is in compliance with NBTC requirements.

[Singapore] BT-A700G/A700GM only This telecommunication equipment is in compliance with the regulation requirement for Singapore.

Complies with IMDA Standards DA104049

■ FCC Regulations BT-A700GA only

- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions; (1) This device may not cause harmful interface, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- Application regulation

FCC Part 15 Subpart B ClassB

FCC Part 15 Subpart C FCC Part 15 Subpart E

- The available scientific evidence does not show that any health problems are associated with using low power wireless devices. There is no proof, however, that these low power wireless devices are absolutely safe. Low power Wireless devices entitlow levels of radio frequency energy (RF) in the microwave range while being used. Whereas high levels of RF can produce health effects (by heating tissue), exposure of low-level RF that does not produce heating effects causes no known adverse health effects. Many studies of low-level RF exposures have not found any biological effects. Some studies have suggested that some biological effects might occur, but such findings have not been confirmed by additional research. The BT-A700GA has been tested and found to comply with FCC radiation exposure limits set forth for an Controlled environment and meets the FCC radio frequency (RF) Exposure Guidelines.
- Compliance with FCC requirement 15.407(c)

 Data transmission is always initiated by software, which is the passed down through the MAC, through the digital and analog baseband, and finally to the RF chip. Several special packets are initiated by the MAC. These are the only ways the digital baseband portion will turn on the RF transmitter, which it then turns off at the end of the packet. Therefore, the transmitter will be on only while one of the aforementioned packets is being transmitted. In other words, this device automatically discontinue transmission in case of either absence of information to transmit or operational failure.
- 5.15-5.35GHz band is restricted to indoor operations only.
- Frequency Tolerance: ±25ppm

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

CAUTION

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- FCC CAUTION

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

 This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

■ ISED Regulations BT-A700GA only

The BT-A700GA complies with the following regulations specified by the ISED.

 Applicable regulation ICES-003

RSS-247

- The available scientific evidence does not show that any health problems are associated with using low power wireless devices. There is no proof, however, that these low power wireless devices are absolutely safe. Low power Wireless devices emit low levels of radio frequency energy (RF) in the microwave range while being used. Whereas high levels of RF can produce health effects (by heating tissue), exposure of low-level RF that does not produce heating effects causes no known adverse health effects. Many studies of low-level RF exposures have not found any biological effects. Some studies have suggested that some biological effects might occur, but such findings have not been confirmed by additional research. The BT-A700GA has been tested and found to comply with IC radiation exposure limits set forth for an uncontrolled environment and meets RSS-102 of the IC radio frequency (RF) Exposure rules.
- 5150-5350 MHz band is restricted to indoor operation only.
 High-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.
- Data transmission is always initiated by software, which is the passed down through the MAC, through the digital and analog baseband, and finally to the RF chip. Several special packets are initiated by the MAC. These are the only ways the digital baseband portion will turn on the RF transmitter, which it then turns off at the end of the packet. Therefore, the transmitter will be on only while one of the aforementioned packets is being transmitted. In other words, this device automatically discontinue transmission in case of either absence of information to transmit or operational failure.
- Les connaissances scientifiques dont nous disposons n'ont mis en évidence aucun problème de santé associé à l'usage des appareils sans fil à faible puissance. Nous ne sommes cependant pas en mesure de prouver que ces appareils sans fil à faible puissance sont entièrement sans danger. Les appareils sans fil à faible puissance émettent une énergie radioélectrique (RF) très faible dans le spectre des micro-ondes lorsqu'ils sont utilisés. Alors qu'une dose élevée de RF peut avoir des effets sur la santé (en chauffant les tissus), l'exposition à de faibles RF qui ne produisent pas de chaleur n'a pas de mauvais effets connus sur la santé. De nombreuses études ont été menées sur les expositions aux RF faibles et n'ont découvert aucun effet biologique. Certaines études ont suggéré qu'il pouvait y avoir certains effets biologiques, mais ces résultats n'ont pas été confirmés par des recherches supplémentaires. Le BT-A700GA a été testé et jugé conforme aux limites d'exposition aux rayonnements énoncées pour un environnement non contrôlé et respecte les règles d'exposition aux fréquences radioélectriques (RF) CNR-102 de l'IC.
- La bande 5150-5350 MHz est restreinte à une utilisation à l'intérieur seulement. Les radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250-5350 MHz et 5650-5850 MHz, et ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.
- La transmission des données est toujours initiée par le logiciel, puis les données sont transmises par l'intermédiaire du MAC, par la bande de base numérique et analogique et, enfin, à la puce RF. Plusieurs paquets spéciaux sont initiés par le MAC. Ce sont les seuls moyens pour qu'une partie de la bande de base numérique active l'émetteur RF, puis désactive celui-ci à la fin du paquet. En conséquence, l'émetteur reste uniquement activé lors de la transmission d'un des paquets susmentionnés. En d'autres termes, ce dispositif interrompt automatiquement toute transmission en cas d'absence d'information à transmettre ou de défaillance.



- This device complies with Industry Canada's licence-exempt RSSs.
 Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.
- Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

■ UL certification BT-A700GA only

The BT-A700GA complies with the following UL/CSA standards and has obtaied the UL/C-UL certifications.

• Applicable standards UL 60950-1

CAN/CSA-C22.2 No. 60950-1,

UL 62368-1

CAN/CSA-C22.2 No. 62368-1

- UL File No. E167973
- UL category NWGQ/NWGQ7/AZOT/AZOT7



RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE.
DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

■ Mexico (Méjico) BT-A700GA only

La operación de este equipo está sujeta a las siguientes dos condiciones: (1) es posible que este equipo o dispositivo no cause interferencia perjudicial y (2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.



■ CE Marking BT-A700G only

KEYENCE Corporation has confirmed that this product complies with the essential requirements of the applicable EU Directive(s), based on the following specifications. Be sure to consider the following specifications when using this product in the Member States of European Union.

- RE Directive
- · RoHS Directive

The full text of the EU declaration of conformity is available at the following internet address: http://www.keyence.com/cedoc

 Frequency band of operation: Maximum radio-frequency power 2400 ~ 2483.5 MHz: 19.54 dBm (89.85 mW) 5180 ~ 5320 MHz: 22.98 dBm (198.61 mW)

These specifications do not give any guarantee that the end-product with this product incorporated complies with the essential requirements of RE and Machinery Directive. The manufacturer of the end-product is solely responsible for the compliance on the end-product itself according to these Directives.

The device is restricted to indoor use only when operating in the 5150 to 5350 MHz frequency range.

AT	BE	BG	HR	CY	CZ	DK
EE	FI	FR	DE	EL	HU	IE
IT	LV	LT	LU	MT	NL	PL
PT	RO	SK	SI	ES	SE	UK
IS	LI	NO	CH	TR		

Explanation of symbols

■ DC Mark



This symbol indicates a direct current.


■ WEEE



This symbol indicates a separate collection for WEEE.

Mark for opening and closing the lid.







Stand-by Mark

This symbol indicates a stand-by condition.

Precautions for proper use

■ Handling of packing




- The BT-A700 Series has an enclosure rating of IP67, however, if the "battery cover or SD card slot cover" is not properly attached, these enclosure ratings cannot be guaranteed. When using in environments where water or dust is present, check if these are properly attached.
- Dropping the BT-A700 Series or subjecting it to extreme shock may lead to the loss of water-proofing.

Cleaning

Clean the following parts with air blow periodically.

If removing dirt is difficult, use a cotton swab to clean the contacts directly. (Use absolute ethanol if dirt is stuck on them.)

Remove the battery attachment cover before cleaning the battery contact.

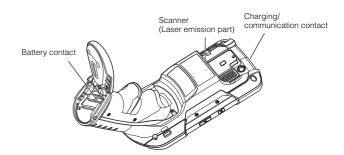

NOTICE

If dirt or dust is attached, contact failure may occur on the battery/ charging/communication contacts. This may cause charging function to deteriorate and instantaneous interruption.

Make sure that waste textile is not attached to the battery/charging/communication contacts when cleaning.

Checking the Package

When opening the package, check the following items are all included. If there is something missing, product failure or damage, contact your nearest KEYENCE sales office.

■ BT-A700/A700G/A700GM/A700GA

Main unit...1

Instruction Manual...1



Specifications

	Item		Specifications		
Model			BT-A700/A700G/A700GM/A700GA		
Controller		CPU	Qualcomm Octa-core		
Controller		OS	Android™ 9		
Main		RAM	3 GB		
memory	ROM		16GB		
		Display method	5.0-inch TFT color LCD, IPS method		
Display	LCD	Resolution (number of dots)	720 (H) x 1280 (V)		
	Operation confirmation LED		3-color LED (red, green, blue, yellow, cyan magenta, white)		
Operations	Hard keys	Туре	Set of arrow keys x 1 (4 directions), trigger key x 1, ENT key, customized key x 2 (P1 key, P2 key), volume key x 2 (Volume Up, Volume Down), power key x 1		
	Touch panel		Electrostatic capacitance method (Gorilla Glass)		
		Reading light source	High-intensity white LED		
	Optical characteristic	Pointer light source	Visible light semiconductor laser (650 nm) Output 700 uW Class 2 laser product (IEC 60825-1)		
		Minimum resolution	2D code: 0.191mm Barcode: 0.127mm		
Scanner		Reading distance	80-1550mm (CODE39 narrow bar width 0.254mm) 25-4100mm (CODE39 narrow bar width 0.508mm) 100-370mm (QR cell size 0.254mm) 0-1200mm (QR cell size 0.508mm)		
		Reading width/ Field range	151x94mm (Reading distance 300mm 1ft)		
	Supp	ported codes	JAN/EAN/UPC (add-on code supported), CODE128, GS1-128, CODE39, NW-7, CODE93, ITF COOP2of5, Industrial 2of5 QR code, Micro QR, DataMatrix (ECC200), PDF417, GS1 DataBar, composite symbol, Postal		
		Wireless standards	IEEE802.11a/b/g/n/ac		
Wireless communica- tion	Wireless LAN	Radio frequency	BT-A700: 2.4GHz (b: 1 to 14ch / g, n, ac, 1 to 13ch; 5.2GHz, 5.3GHz, 5.6GHz (a/n/ac) BT-A700G: 2.4GHz (b, g, n, ac:1 to 13ch) 5.2GHz, 5.3GHz(a/n/ac) BT-A700GM: 2.4GHz (b, g, n, ac:1 to 13ch) 5.2GHz, 5.3GHz, 5.6GHz (a/n/ac) BT-A700GA: 2.4GHz (b, g, n, ac: 1 to 11ch) 5.2GHz, 5.3GHz, 5.6GHz, 5.8GHz (a/n/ac) *W52/W53 can only be used indoors.		
		Security method	Security: OPEN / WEP(64/128 bit)/ WPAWPA2 WPA encryption: TKIP/ AES Authentication: PSK/ PEAP/ EAP-TLS/ EAP-TTLS/ EAP-PWD		
	Bluetooth®	Wireless standards	Bluetooth® V5.0 + BR/EDR/LE		
		Supported profiles	A2DP, AVRCP, HID, HSP, IOPT, OPP, PAN, SPP		
		Communication distance	Approx. 10 m		
External recording	Supr	oorted media	micro SD/SDHC/SDXC UHS-I		

Item			Specifications	
Power supply		Type	Dedicated lithium ion battery pack	
	Main battery	Capacity	6250 mAh	
		Continuous usage time	Approx. 32 hours *1*3	
		Charging time	Approx. 6.0 hours (ambient temperature)	
	Backup battery	RAM data	Electric double layer capacitor 3 minutes *2*	
	Buzzer		Tone: 16 levels	
	Vibration		Available	
Others	Microphone Speaker		Available	
	Color Camera		5MP	
	Sensor		Accelerometer, Light, Gyroscope, Geomagnetic	
	Enclosure rating		IP67	
	Drop resistance (from a height)		Onto concrete from a height of 1.8 m Up to 30,000 impacts from a height of 30 cm *3	
Environmen-	Ambient operating temperature		-20 to +50°C (no freezing) *4	
tal resistance	Ambient operating humidity		20 to 85% RH (no condensation)	
	Ambient storage temperature		-20 to +60°C (no freezing)	
	Ambient storage humidity		20 to 85% RH (no condensation)	
Dimensions			88mm x 134mm x 235mm	
Weight			Approx. 287, g (with battery pack)	

This is the continuous usage time for the case of performing barcode reading every 20 seconds to establish a round-trip wireless communication with the operation confirmation LED and vibration function turned off, with the buzzer turned on (low confirmation LED and vibration function turned off, with the buzzer furned on (low volume), with the backlight turned on (0%), at normal temperature.


This is a test value, and the value is not guaranteed.


When the main battery is not attached or has no remaining charge.

This is a test value, and the value is not guaranteed.

Continuous usage time may be shortened significantly in a subfreezing environment due to a load. Be sure to conduct a test before use.

Outline dimensional drawing

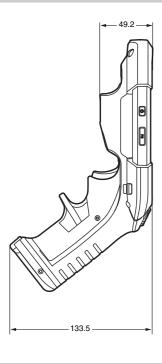

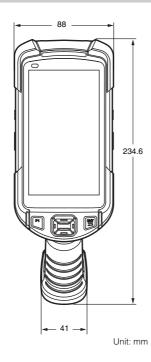

WARRANTIES AND DISCLAIMERS

- (1) KEYENCE warrants the Products to be free of defects in materials and workmanship for a period of one (1) year from the date of shipment. If any models or samples were shown to Buyer, such models or samples were used merely to illustrate the general type and quality of the Products and not to represent that the Products would necessarily conform to said models or samples. Any Products found to be defective must be shipped to KEYENCE with all shipping costs paid by Buyer or offered to KEYENCE for inspection and examination. Upon examination by KEYENCE, KEYENCE, at its sole option, will refund the purchase price of, or repair or replace at no charge any Products found to be defective. This warranty does not apply to any defects resulting from any action of Buyer, including but not limited to improper installation, improper interfacing, improper repair, unauthorized modification, misapplication and mishandling, such as exposure to excessive current, heat, coldness, moisture, vibration or outdoors air. Components which wear are not warranted.
- (2) KEYENCE is pleased to offer suggestions on the use of its various Products. They are only suggestions, and it is Buyer's responsibility to ascertain the fitness of the Products for Buyer's intended use. KEYENCE will not be responsible for any damages that may result from the use of the Products.
- (3) The Products and any samples ("Products/Samples") supplied to Buyer are not to be used internally in humans, for human transportation, as safety devices or fail-safe systems, unless their written specifications state otherwise. Should any Products/ Samples be used in such a manner or misused in any way, KEYENCE assumes no responsibility, and additionally Buyer will indemnify KEYENCE and hold KEYENCE harmless from any liability or damage whatsoever arising out of any misuse of the Products/Samples.
- (4) OTHER THAN AS STATED HEREIN, THE PRODUCTS/SAMPLES ARE PROVIDED WITH NO OTHER WARRANTIES WHATSOEVER. ALL EXPRESS, IMPLIED, AND STATUTORY WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF PROPRIETARY RIGHTS, ARE EXPRESSLY DISCLAIMED.

IN NO EVENT SHALL KEYENCE AND ITS AFFILIATED ENTITIES BE LIABLE TO ANY PERSON OR ENTITY FOR ANY DIRECT, INDIRECT, INCIDENTAL, PUNITIVE, SPECIAL OR CONSEQUENTIAL DAMAGES (INCLUDING, WITHOUT LIMITATION, ANY DAMAGES RESULTING FROM LOSS OF USE, BUSINESS INTERRUPTION, LOSS OF INFORMATION, LOSS OR INACCURACY OF DATA, LOSS OF PROFITS, LOSS OF SAVINGS, THE COST OF PROCUREMENT OF SUBSTITUTED GOODS, SERVICES OR TECHNOLOGIES, OR FOR ANY MATTER ARISING OUT OF OR IN CONNECTION WITH THE USE OR INABILITY TO USE THE PRODUCTS, EVEN IF KEYENCE OR ONE OF ITS AFFILIATED ENTITIES WAS ADVISED OF A POSSIBLE THIRD PARTY'S CLAIM FOR DAMAGES OR ANY OTHER CLAIM AGAINST BUYER. In some jurisdictions, some of the foregoing warranty disclaimers or damage limitations may not apply.

BUYER'S TRANSFER OBLIGATIONS:

If the Products/Samples purchased by Buyer are to be resold or delivered to a third party, Buyer must provide such third party with a copy of this document, all specifications, manuals, catalogs, leaflets and written information provided to Buyer pertaining to the Products/Samples.

E 1101-3

KEYENCE CORPORATION

1-3-14, Higashi-Nakajima, Higashi-Yodogawa-ku,

Osaka, 533-8555, Japan PHONE: +81-6-6379-2211

www.keyence.com

AUSTRIA HONG KONG NETHERLANDS TAIWAN Ph: +43 2236 378266 0 Ph: +852-3104-1010 Ph: +31 40 20 66 100 Ph: +886-2-2721-8080 BELGIUM HUNGARY **PHILIPPINES** THAILAND Ph: +32 15 281 222 Ph: +36 1 802 73 60 Ph: +63-2-981-5000 Ph: +66-2-369-2777 UK & IRELAND BRAZIL **POLAND** INDIA Ph: +91-44-4963-0900 Ph: +44 1908-696-900 Ph: +55-11-3045-4011 Ph: +48 71 36861 60 CANADA INDONESIA ROMANIA USA Ph: +1-905-366-7655 Ph: +62-21-2966-0120 Ph: +40 269 232 808 Ph: +1-201-930-0100 CHINA ITALY SINGAPORE VIETNAM Ph: +86-21-3357-1001 Ph: +39-02-6688220 Ph: +65-6392-1011 Ph: +84-24-3772-5555 CZECH REPUBLIC KORFA SLOVAKIA Ph: +82-31-789-4300 Ph: +420 220 184 700 Ph: +421 2 5939 6461 FRANCE MALAYSIA SLOVENIA Ph: +33-1-56-37-78-00 Ph: +60-3-7883-2211 Ph: +386 1 4701 666 GERMANY SWITZERLAND MEXICO Ph: +49-6102-3689-0 Ph: +52-55-8850-0100

Specifications are subject to change without notice.

Copyright (c) 2019 KEYENCE CORPORATION. All rights reserved 15817GB 1059-1 96M15817 Printed in Japan

