

### TuneFlex® AUX with SmartClick User Guide

Thank you for purchasing our TuneFlex AUX, the most interference-free way to listen to your iPod® or  $i Phone \\ ^{\bowtie} through your car stereo. The included SmartClick remote control makes Tune \\ Flex the best$ and safest way to control your iPod while keeping your eyes on the road.

### Setting up Tuneflex with SmartClick is quick and easy.

- 1. Plug TuneFlex into your car's cigarette lighter or accessory port.
- 2. Select the adapter appropriate for your iPod or iPhone model and slide it onto TuneFlex.
- ✓ iPod touch (1st generation)
- iPhone 3G
- ▲ iPod nano (4th generation) ▲ iPod nano (3rd generation)
- ✓ iPod classic 120GB/80GB



3. Slide your iPod into the TuneFlex adapter, seating it firmly onto the built-in dock connector.

**4.** Adjust TuneFlex's flexible neck, and rotate the cradle to a convenient position.


If you wish, install the Steering Wheel Mount for your new SmartClick Remote. The Steering  $Wheel\ Mount\ keeps\ SmartClick\ always\ at\ hand.\ Make\ sure\ your\ installation\ does\ not\ interfere$ with complete control of the steering wheel. We recommend positioning it on the inner easily operated using your thumb.

1. Fasten the Mount to your steering wheel using the provided hook & loop strap.


2. Place the remote into the Mount. The SmartClick Remote stays put by means of


a strong magnet, but can be detached for handheld use. 3. Press PLAY and go!


## Remote Control Buttons:



Note: Not all iPod or iPhone models display the shuffle icon during use.









TuneFlex AUX plugs into your car's cigarette lighter to charge and power your iPod as you use it. The light ring on the plug shows charging status at a glance: red when connected, amber when charging, and green when charging is finished.

Your TuneFlex package includes an audio cable that allows you to take advantage of your car stereo's auxiliary audio input jack. This input jack may be located on the dashboard in plain view, or under the dashboard, or even inside the glove compartment. Locate your car stereo's auxiliary audio-in jack and use the included cable to  $connect\ it\ to\ the\ headphone\ jack\ of\ your\ player,\ or\ to\ the\ built-in\ audio\ jack\ on\ Tune Flex's\ base.$ 

To protect itself and your equipment from power surges, Tuneflex uses an internal automatically resetting fuse. If the device ever stops responding, as in the case of a power surge, disconnect TuneFlex for 15 seconds then plug it back in, allowing its internal fuse to reset itself.

Near TuneFlex's audio jack at the base of the stem is a Gain Adjustment wheel. If you connect your audio cable through TuneFlex's audio jack, you can use this wheel as a fine adjustment volume control, to match the strength of your audio signal for best results with your car stereo. We recommend first trying a low setting. If the resulting signal is too weak or too low in volume, first turn down your stereo's volume levels, then rotate the wheel toward Hi. Choose the setting that results in the strongest, cleanest sound with your system.

### We're confident that you'll be pleased with TuneFlex AUX with SmartClick. Happy motoring!

When using your iPhone in phone mode, you may want to temporarily disconnect TuneFlex; or you may consider the use of a Bluetooth headset for safety and convenience while driving.

calls, make sure you understand how the ringer switch works:

**Ringer Switch on:** you will hear the ringtone through your speakers or headphones. Ringer Switch off: You will not hear any ringtone.

call, the music will resume. If necessary, reconnect TuneFlex to your iPhone.

This information reflects iPhone firmware version 1.1.1. Changes, if any, due to iPhone firmware updates will be posted on our website. Visit www.griffintechnology.com/support/ for information.

# Technical Specifications

Using TuneFlex with iPhone

■ Input Voltage Range: 12 volts DC Maximum Current: 2 amp


Output Voltage: 5.2 volts DC at 1 amp


▲ Remote Battery: Panasonic CR 2032 3V battery or equivalent The SmartClick Remote uses a CR 2032 or equivalent 3V battery. Should you ever need to replace the battery, slide out the battery tray on SmartClick's side.

Problem? No Problem.

1 YEAR WARRANTY Warranty details at www.griffintechnology.com/support/

Call Griffin Customer Support at 800-208-5996 Monday through Thursday (9am – 6pm Central time) and Friday 9am to 5pm. Your call will be answerd by real human beings who know and use Griffin products. www.griffintechnology.com/support/



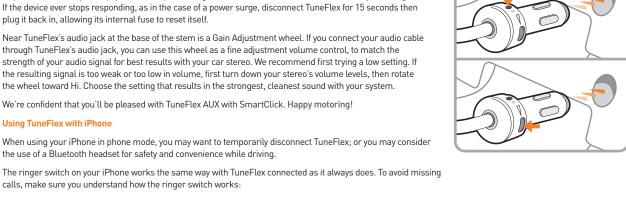





© 2009 Griffin Technology • www.griffintechnology.com • TuneFlex is a registered trademark of Griffin Technology Inc. • iPod is a trademark of Apple Inc., registered in the U.S. and other countries. • iPhone is a trademark of Apple Inc. • Patents pending Made in PRC • Invented in Tennessee Please recycle this package. Thanks!

The WEEE symbol indicates separate collection for electrical and electronic equipment. le stand behind every product with the industry's best customer service, backed by a simple, fair warranty. Using this product signifies your acceptance of the terms of the warranty, so please read our warranty details at www.griffintechnology.com/support/efore using your Griffin product. If you experience any problems call Griffin Technology's Customer Support at 800-208-5996 Monday—Thursday 9 am to 6 pm and Friday, 9 am to 5 pm Central time.