

RW8822-50B1

IEEE 802.11a/b/g/n/ac 2T2R+Bluetooth 5.0 Combo Module

DISCLAIMER AND COPYRIGHT NOTICE

Information in this document, including URL references, is subject to change without notice.

This document is provided “As if” with no whatsoever, including any warranty of merchantability, noninfringement, fitness for any purpose, or any warranty otherwise arising out of any proposal, specification or samples.

All liability, including liability for infringement of any proprietary rights, relating to use of information in this document is disclaimed. No licenses express or implied, by estoppel or otherwise, to any intellectual property rights are granted herein.

The Bluetooth logo and symbol belong to the Bluetooth SIG Inc.

The Wi-Fi Alliance Member Logo is a trademark of the Wi-Fi Alliance.

All trade names, trademarks and registered trademarks mentioned in this document are property of their respective owners, and are hereby acknowledged.

Copyright ITON Technology Corp. All rights reserved.

Table of Contents

1. Device Overview	4
1.1 Descriptions	4
1.2 Features	4
1.2.1 General Features	4
1.2.2 Wi-Fi Key Features	4
1.2.3 Bluetooth Key Features	5
1.3 Functional Block Diagram	5
2. Pin Configuration and Functions	6
2.1 Module Pin Diagram	6
2.2 Pin Functions	6
3. Specifications	9
3.1 General Characteristics	9
3.2 RF Characteristics	10
3.2.1 Receiver RF Specifications	10
3.2.2 Transmitter RF Specifications	12
3.2.3 Bluetooth RF Specifications	15
4. Application and Implementation	17
4.1 Application Diagram	17
5. Mechanical and Package	18
5.1 Mechanical Size	18
5.2 Recommended Land Pattern	18
5.3 Package Information	19

6. Thermal Reflow	19
7. Ordering Information	20
8. Revision History	20

ITON

1. Device Overview

1.1 Descriptions

The RW8822-50B1 is a highly integrated module that supports 2T2R 802.11 a/b/g/n/ac with Wireless LAN (WLAN) SDIO (SDIO 1.1/2.0/3.0) interface controller and Bluetooth 5.0 HS-UART interface controller. The high speed FFT/IFFT paths, combined with BPSK, QPSK, 16QAM, 64QAM and 256QAM modulation of the individual subcarriers, and compatible coding rate of 1/2, 2/3, 3/4, 5/6, provide up to 866.7Mbps for IEEE 802.11ac MIMO OFDM. The RW8822-50B1 MAC supports 802.11e for multimedia applications, 802.11i and WAPI for security.

The RW8822-50B1 provides a complete solution for a high-performance integrated wireless and Bluetooth device.

1.2 Features

1.2.1 General Features

- Supports 3.3V power supply
- Complies with SDIO 1.1/2.0/3.0 for WLAN with clock rate up to 208MHz
- CMOS MAC, Baseband PHY and RF in a single module for IEEE 802.11a/b/g/n/ac compatible WLAN
- IEEE 802.11i (WPA, WPA2). Open, shared key, and pair-wise key authentication services
- Multiple BSSID feature allows the module to assume multiple MAC identities when used as a wireless bridge
- Wi-Fi Direct supports wireless peer to peer application
- IEEE802.11h DFS,TPC,Spectrum Measurement

1.2.2 Wi-Fi Key Features

- IEEE 802.11a/b/g/n/ac compatible WLAN
- IEEE 802.11ac MIMO OFDM
- IEEE 802.11n MIMO OFDM
- Supports 2.4Ghz and 5Ghz band channels
- 20MHz / 40MHz / 80MHz bandwidth transmission
- Maximum data rate 54Mbps in 802.11g, 300Mbps in 802.11n and 866.7Mbps in 802.11ac
- OFDM with BPSK, QPSK, 16QAM, 64QAM and 256QAM modulation. Convolutional Coding Rate: 1/2, 2/3, 3/4, and 5/6
- DSSS with DBPSK and DQPSK, CCK modulation with long and short preamble

- Support STBC,LDPC

1.2.3 Bluetooth Key Features

- Supports Bluetooth 5.0 system
- Compatible with Bluetooth V2.1 systems
- Enhanced BT/Wi-Fi Coexistence Control to improve transmission quality in different profiles
- Dual Mode support: Simultaneous LE and BR/EDR
- Integrated internal Class 1, Class 2, and Class 3 PA
- Supports Enhanced Power Control
- Supports Bluetooth Low Energy
- Integrated 32K oscillator for power management
- Complies with HS-UART with configurable baud rate for Bluetooth

1.3 Functional Block Diagram

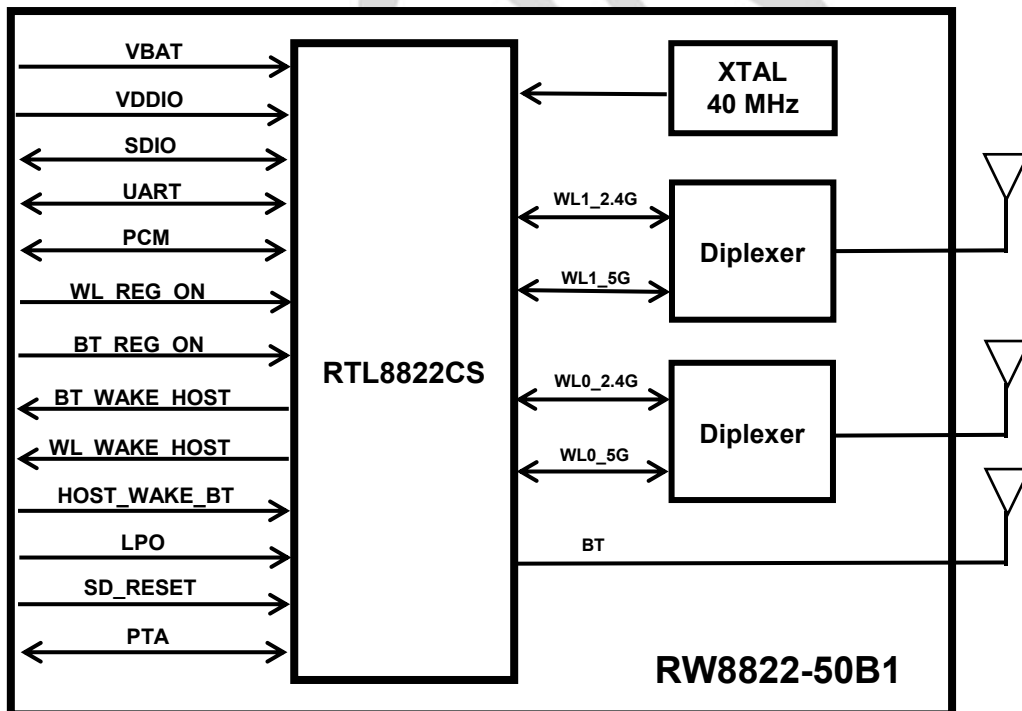


Figure 1. Block Diagram of RW8822-50B1

2. Pin Configuration and Functions

2.1 Module Pin Diagram

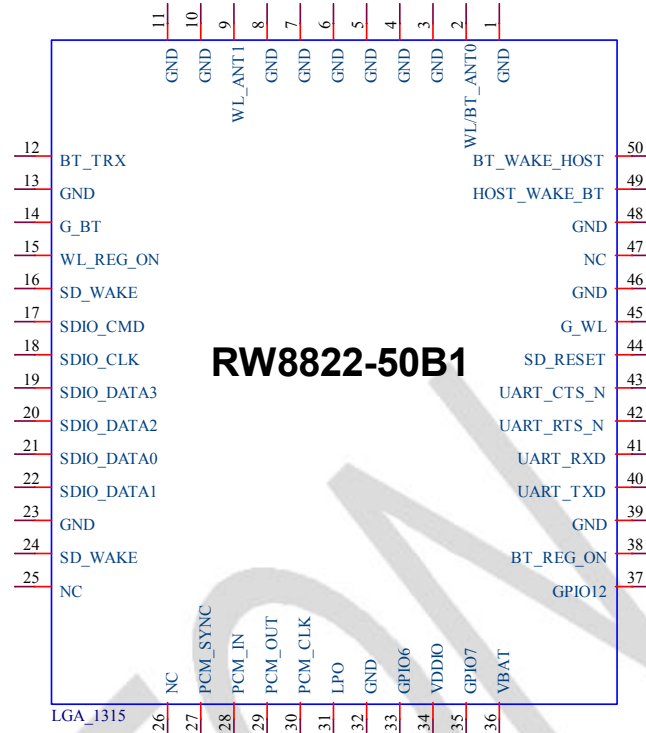


Figure 2.Pin Diagram of RW8822-50B1

2.2 Pin Functions

Pin	Name	Description
1	GND	Ground
2	WL/BT_ANT0	RF input/output of path S1 WLAN(3 Antennas Version) RF input/output of path S1 WLAN and BT(2 Antennas Version)
3	GND	Ground
4	GND	Ground
5	GND	Ground
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	WL_ANT1	RF input/output of path S0 WLAN
10	GND	Ground

11	GND	Ground
12	BT_TRX	RF input/output port for BT(3 Antennas Version)
13	GND	Ground
14	G_BT	No connect, keep floating
15	WL_REG_ON	This pin can externally shut down the RW8822-50B1 WLAN function when WL_REG_ON is pulled low.
16	SD_WAKE	Output and open drain active low signal. This signal is used to request that the system return from a sleep/suspended state to service a function initiated wake event.
17	SDIO_CMD	SDIO command input
18	SDIO_CLK	SDIO clock input
19	SDIO_DATA3	SDIO port data 3
20	SDIO_DATA2	SDIO port data 2
21	SDIO_DATA0	SDIO port data 0
22	SDIO_DATA1	SDIO port data 1
23	GND	Ground
24	SD_WAKE	Output and open drain active low signal. This signal is used to request that the system return from a sleep/suspended state to service a function initiated wake event.
25	NC	No connect, keep floating
26	NC	No connect, keep floating
27	PCM_SYNC	PCM sync signal
28	PCM_IN	PCM data input
29	PCM_OUT	PCM data output
30	PCM_CLK	PCM clock
31	LPO	External 32K or RTC clock input
32	GND	Ground
33	GPIO6	This Pin can be used to PTA interface. When use 2-wire UART mode, it is LTECOEX_UART_RX. When use 3-wire GPIO mode, it is LTE_RX.
34	VDDIO	Power supply for GPIOs, SUS_CLK, EESK, CHIIP_EN. 3.3V or 1.8V is alternative.

35	GPIO7	This Pin can be used to PTA interface. When use 2-wire UART mode, it is LTECOEX_UART_TX. When use 3-wire GPIO mode, it is LTE_TX.
36	VBAT	3.3V power supply
37	GPIO12	This Pin can be used to PTA interface. When use 3-wire GPIO mode, it is WLAN Priority.
38	BT_REG_ON	This pin can externally shut down the RW8822-50B1 BT function when BT_REG_ON is pulled low, UART interface will be also disabled. This pin can be also defined as the BT Radio-off function with host interface remaining connected
39	GND	Ground
40	UART_TXD	BT High-Speed UART Data Out
41	UART_RXD	BT High-Speed UART Data In
42	UART_RTS_N	BT High-Speed UART RTS
43	UART_CTS_N	BT High-Speed UART CTS
44	SD_RESET	Input and active low signal, this signal can externally shut down the module. When this pin is pulled low, SDIO interface will be disabled.
45	G_WL	WL TEST_MODE_SEL 0: Normal operation mode; 1: Test/Debug mode
46	GND	Ground
47	NC	No connect, keep floating
48	GND	Ground
49	HOST_WAKE_BT	Input signal, Host wake up BT
50	BT_WAKE_HOST	Output signal, BT wake up host

3. Specifications

3.1 General Characteristics

Category	Descriptions
Dimension	L*W*H :15.0mm (±0.3mm)*13.0mm (±0.3mm)*2.4mm (±0.2mm)
Chip-set	RTL8822CS
Standard	IEEE 802.11a/b/g/n/ac+BT 5.0
Modulation Type	CCK, OFDM (16 QAM/64 QAM/256 QAM)
Frequency Band	2400~2500MHz,4900-5845MHz
Interface	WLAN: SDIO, Bluetooth: UART
Data Security	WEP,WPA/WPA2
Transmit Power	2.4G: 11b 11M:19.5±2dBm 11g 54M:18±2dBm 11n HT20 MCS7:17±2dBm 11n HT40 MCS7:17±2dBm 5G: 11a 54M:17±2dBm 11n HT20 MCS7:16±2dBm 11n HT40 MCS7:16±2dBm 11ac VHT80 MCS9:14.5±2dBm
Rx Sensitivity	2.4G: 11b 11M:-86dBm@8% PER 11g 54M: -75dBm@10% PER 11n HT20 MCS7: -70dBm@10% PER 11n HT40 MCS7: -68dBm@10% PER 5G: 11a 54M:-75dBm@10% PER 11n HT20 MCS7: -70dBm@10% PER 11n HT40 MCS7: -68dBm@10% PER 11ac VTH80 MCS9:-59dBm@10% PER
Data Rate	802.11b [11,5.5,2 and 1Mbps] 802.11g [54,48,36,24,18,12,9&6Mbps] 802.11n HT20:up to 144.4Mbps 802.11n HT40:up to 300Mbps 802.11ac VHT80:up to 866.7Mbps
Frequency Error	2.4GHz:<±25 ppm(11b),<±20 ppm(11g/n);5GHz:<±20 ppm

Ambient Temperature	0℃~70℃
Storage Temperature	-40℃~85℃
Antenna	External PF antenna
Operating System	Linux
Operating Voltage	VBAT:3.3V;VDDIO:1.8V or 3.3V

3.2 RF Characteristics

All measurements are made under nominal supply voltage, room temperature and conducted conditions at each antenna port rather than antenna.

3.2.1 Receiver RF Specifications

Parameter	Conditions		Min.	Nom.	Max.	Unit
Receive input frequency						
2.4GHz	802.11b/g/n mode		2400	-	2500	MHz
Receiver sensitivity						
802.11b	1Mbps	FER<8%, Packet size= 1,024bytes	-	-	-82	dBm
	2Mbps		-	-	-80	dBm
	5.5Mbps		-	-	-78	dBm
	11Mbps		-	-	-76	dBm
802.11g	6Mbps	PER<10%, Packet size= 1,024bytes	-	-	-82	dBm
	9Mbps		-	-	-81	dBm
	12Mbps		-	-	-79	dBm
	18Mbps		-	-	-77	dBm
	24Mbps		-	-	-74	dBm
	36Mbps		-	-	-70	dBm
	48Mbps		-	-	-66	dBm
	54Mbps		-	-	-65	dBm
802.11n (HT20)	MCS0.	PER<10%, Packet size= 4,096bytes	-	-	-80	dBm
	MCS1.		-	-	-77	dBm
	MCS2		-	-	-75	dBm
	MCS3.		-	-	-72	dBm
	MCS4.		-	-	-68	dBm
	MCS5.		-	-	-64	dBm
	MCS6.		-	-	-63	dBm
	MCS7.		-	-	-62	dBm

802.11n (HT40)	MCS0.	PER<10%, Packet size= 4,096bytes	-	-	-77	dBm
	MCS1.		-	-	-74	dBm
	MCS2		-	-	-72	dBm
	MCS3.		-	-	-69	dBm
	MCS4.		-	-	-65	dBm
	MCS5.		-	-	-61	dBm
	MCS6.		-	-	-60	dBm
	MCS7.		-	-	-59	dBm
Maximum input level						
802.11b	FER<8%		-10	-	-	dBm
802.11g	FER<10%		-20	-	-	dBm
802.11n	FER<10%		-30			dBm

Parameter	Conditions		Min.	Nom.	Max.	Unit
Receive input frequency						
5GHz	802.11a/n/ac mode		4900	-	5845	MHz
Receiver sensitivity						
802.11a	6Mbps	FER<10%, Packet size= 1,024bytes	-	-	-82	dBm
	9Mbps		-	-	-81	dBm
	12Mbps		-	-	-79	dBm
	18Mbps		-	-	-77	dBm
	24Mbps		-	-	-74	dBm
	36Mbps		-	-	-70	dBm
	48Mbps		-	-	-66	dBm
	54Mbps		-	-	-65	dBm
802.11n (HT20)	6Mbps	PER<10%, Packet size= 4,096bytes	-	-	-80	dBm
	9Mbps		-	-	-77	dBm
	12Mbps		-	-	-75	dBm
	18Mbps		-	-	-72	dBm
	24Mbps		-	-	-68	dBm
	36Mbps		-	-	-64	dBm
	48Mbps		-	-	-63	dBm
	54Mbps		-	-	-62	dBm
802.11n (HT40)	MCS0.	PER<10%,	-	-	-77	dBm
	MCS1.		-	-	-74	dBm
	MCS2		-	-	-72	dBm

	MCS3.	Packet size= 4,096bytes	-	-	-69	dBm
	MCS4.		-	-	-65	dBm
	MCS5.		-	-	-61	dBm
	MCS6.		-	-	-60	dBm
	MCS7.		-	-	-59	dBm
802.11ac (VHT80)	MCS0.	PER<10%, Packet size= 4,096bytes	-	-	-76	dBm
	MCS1.		-	-	-73	dBm
	MCS2.		-	-	-71	dBm
	MCS3.		-	-	-68	dBm
	MCS4.		-	-	-64	dBm
	MCS5.		-	-	-60	dBm
	MCS6.		-	-	-59	dBm
	MCS7.		-	-	-58	dBm
	MCS8.		-	-	-53	dBm
	MCS9.		-	-	-51	dBm
Maximum input level						
802.11a	FER<10%		-30	-	-	dBm
802.11n	FER<10%		-30	-	-	dBm
802.11ac	FER<10%		-30	-	-	dBm

3.2.2 Transmitter RF Specifications

Parameter	Condition	Min.	Nom.	Max.	Unit.
Receive input frequency					
802.11b/g/n	2.4GHz	2400	-	2500	MHz
Transmit power					
802.11b	11Mbps	17	19	21	dBm
802.11g	54Mbps	16	18	20	dBm
802.11n	HT20, MCS7	15	17	19	dBm
	HT40, MCS7	15	17	19	dBm
Spectrum mask					
802.11b	$f_c - 22\text{MHz} < f < f_c - 11\text{MHz} \& f_c + 11\text{MHz} < f < f_c + 22\text{MHz}$	-	-	-30	dBr
	$f_c - 55\text{MHz} < f < f_c - 22\text{MHz} \& f_c + 22\text{MHz} < f < f_c + 55\text{MHz}$	-	-	-50	dBr
802.11g	$f_c \pm 9\text{MHz}$	-	-	0	dBr

	$f_c \pm 11\text{MHz}$	-	-	-20	dBr
	$f_c \pm 20\text{MHz}$	-	-	-28	dBr
	$f_c \pm 30\text{MHz}$	-	-	-40	dBr
802.11n	$f_c \pm 9\text{MHz}$	-	-	0	dBr
	$f_c \pm 11\text{MHz}$	-	-	-20	dBr
	$f_c \pm 20\text{MHz}$	-	-	-28	dBr
	$f_c \pm 30\text{MHz}$	-	-	-45	dBr
Center frequency tolerance					
802.11b		-25	-	+25	pmm
802.11g/n		-20	-	+20	pmm
EVM (Error Vector Magnitude)*					
802.11b	1Mbps	-	-	35	%
	2Mbps	-	-	35	%
	5.5Mbps	-	-	35	%
	11Mbps	-	-	35	%
802.11g	6Mbps	-	-	-5	%
	9Mbps	-	-	-8	dB
	12Mbps	-	-	-10	dB
	18Mbps	-	-	-13	dB
	24Mbps	-	-	-16	dB
	36Mbps	-	-	-19	dB
	48Mbps	-	-	-22	dB
	54Mbps	-	-	-25	dB
802.11n	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB
	MCS5.	-	-	-22	dB
	MCS6.	-	-	-25	dB
	MCS7.	-	-	-28	dB
Remarks					

EVM :

<Test condition>

Method: composite EVM method.

Phase correction: Symbol-by-symbol correction.

Channel estimation: Raw channel estimate Raw Long Symbols.

Symbol timing correction: on.

Frequency Sync: Long training symbol.

Parameter	Condition	Min.	Nom.	Max.	Unit.
Receive input frequency					
802.11a/n/ac	5GHz	4900	-	5845	MHz
Transmit power					
802.11a	54Mbps	15	17	19	dBm
802.11n	HT20, MCS7	14	16	18	dBm
	HT40, MCS7	14	16	18	dBm
802.11ac	VHT20,MCS8	13	15	17	dBm
	VHT40,MCS9	12.5	14.5	16.5	dBm
	VHT80,MCS9	12.5	14.5	16.5	dBm
Spectrum mask					
802.11a	$f_c \pm 9\text{MHz}$	-	-	0	dBr
	$f_c \pm 11\text{MHz}$	-	-	-20	dBr
	$f_c \pm 20\text{MHz}$	-	-	-28	dBr
	$f_c \pm 30\text{MHz}$	-	-	-40	dBr
802.11n	$f_c \pm 9\text{MHz}$	-	-	0	dBr
	$f_c \pm 11\text{MHz}$	-	-	-20	dBr
	$f_c \pm 20\text{MHz}$	-	-	-28	dBr
	$f_c \pm 30\text{MHz}$	-	-	-45	dBr
802.11ac (VHT80)	$f_c \pm 39\text{MHz}$	-	-	0	dBr
	$f_c \pm 41\text{MHz}$	-	-	-20	dBr
	$f_c \pm 80\text{MHz}$	-	-	-28	dBr
	$f_c \pm 120\text{MHz}$	-	-	-40	dBr
Center frequency tolerance					
802.11a/n/ac		-20	-	+20	pmm
EVM (Error Vector Magnitude)*					
802.11a	6Mbps	-	-	-5	%
	9Mbps	-	-	-8	dB
	12Mbps	-	-	-10	dB

	18Mbps	-	-	-13	dB
	24Mbps	-	-	-16	dB
	36Mbps	-	-	-19	dB
	48Mbps	-	-	-22	dB
	54Mbps	-	-	-25	dB
802.11n	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB
	MCS5.	-	-	-22	dB
	MCS6.	-	-	-25	dB
	MCS7.	-	-	-28	dB
802.11ac	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB
	MCS5.	-	-	-22	dB
	MCS6.	-	-	-25	dB
	MCS7.	-	-	-27	dB
	MCS8.	-	-	-30	dB
	MCS9.	-	-	-32	dB
Remarks					
EVM : <Test condition> Method: composite EVM method. Phase correction: Symbol-by-symbol correction. Channel estimation: Raw channel estimate Raw Long Symbols. Symbol timing correction: on. Frequency Sync: Long training symbol.					

3.2.3 Bluetooth RF Specifications

Parameter	Conditions	Minimum	Typical	Maximum	Unit
Frequency range		2402		2480	MHz

RX sensitivity	1 Mbps	-	-85	-	dBm
	2 Mbps	-	-85	-	dBm
	3 Mbps	-	-85	-	dBm
Initial carrier frequency offset		-24	5	24	KHz
Output power	BR/EDR	0	4	8	dBm
	LE	0	4	8	dBm

ITON

4. Application and Implementation

4.1 Application Diagram


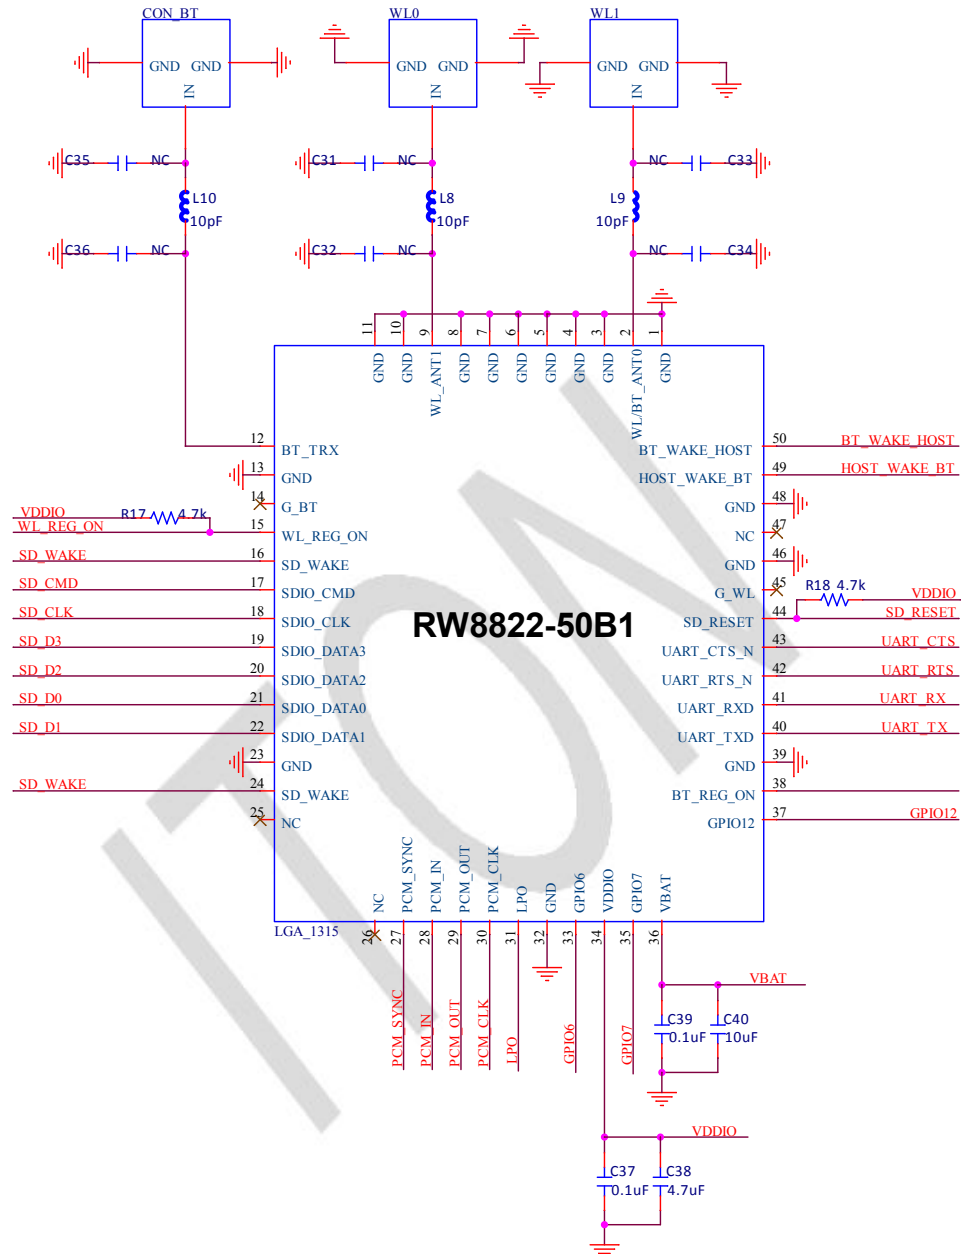


Figure 3. Application Schematic Diagram of RW8822-50B1

5. Mechanical and Package

5.1 Mechanical Size

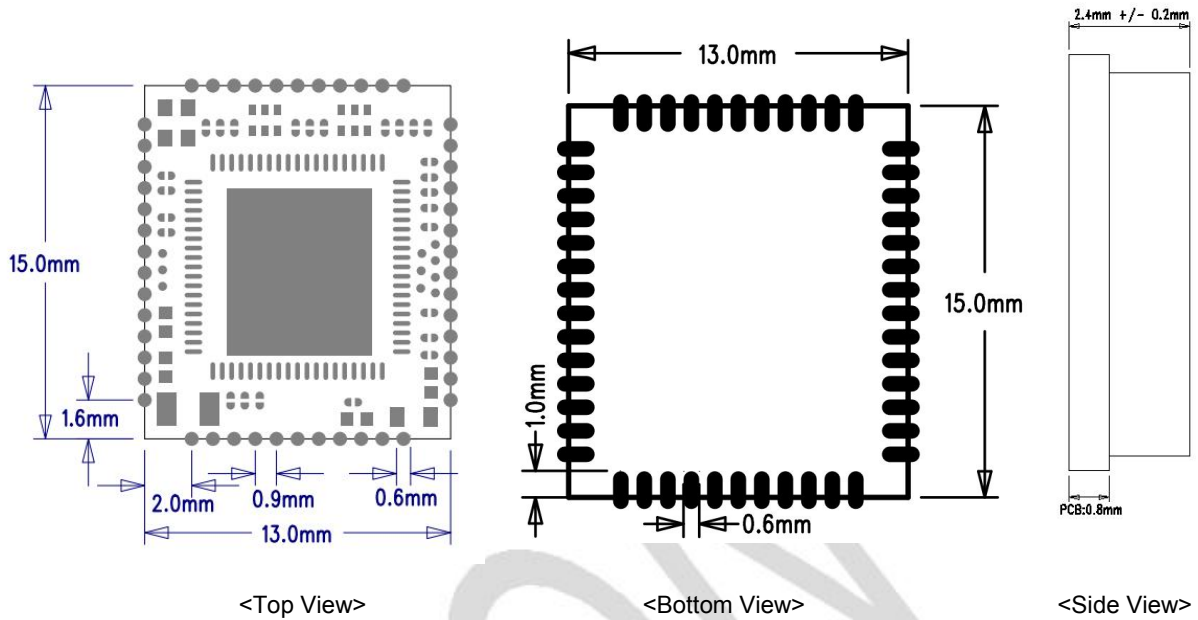

Note: L*W*H: 15.0mm (± 0.3 mm)*13.0mm (± 0.3 mm)*2.4mm (± 0.2 mm)

Figure 4. Mechanical Size of RW8822-50B1

5.2 Recommended Land Pattern

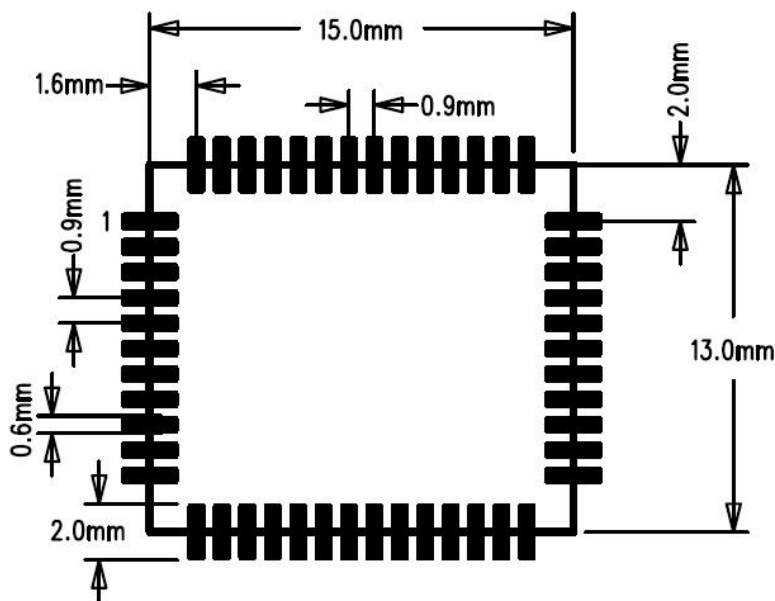


Figure 5. Recommended Land Pattern of RW8822-50B1

5.3 Package Information

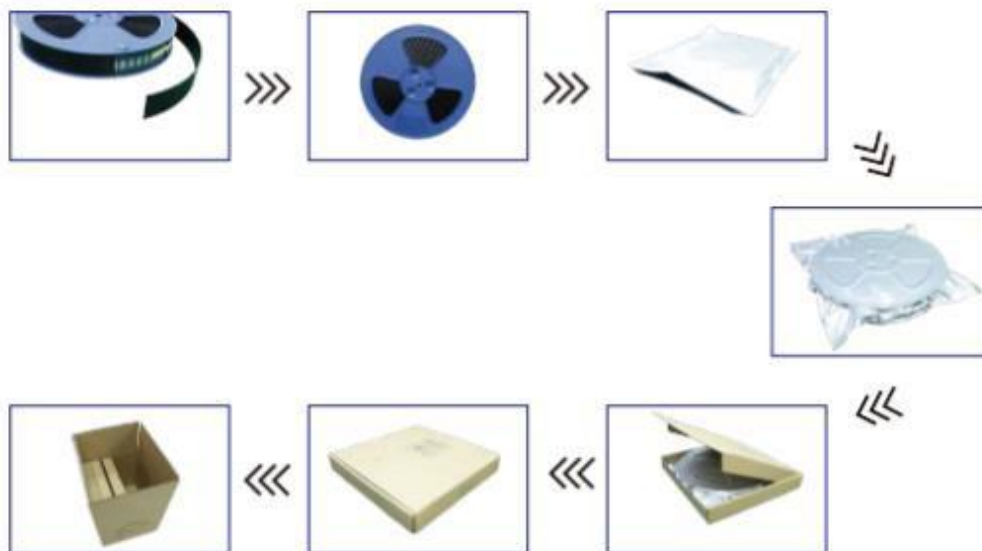


Figure 6. Brief Packaging Process of RW8822-50B1 Modules

6. Thermal Reflow

Referred to IPC/JEDEC standard.

Peak temperature: <250°C

Number of times: ≤2

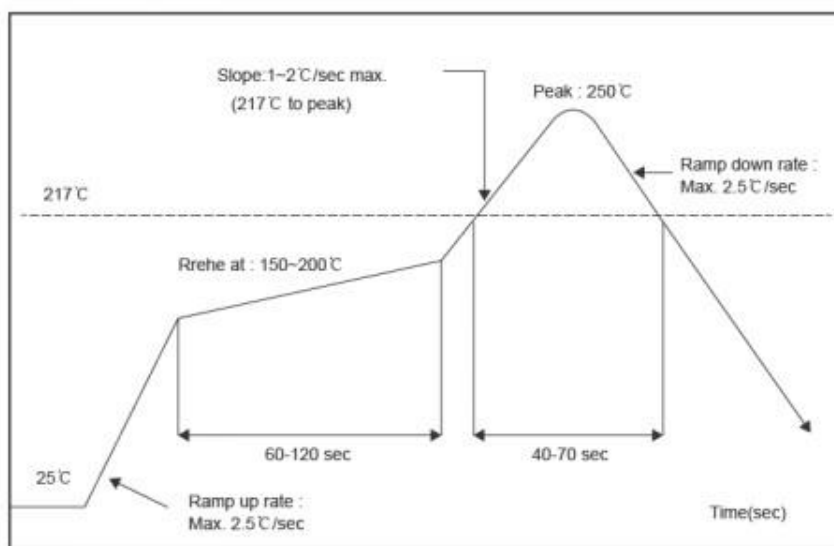


Figure 7. Recommended Reflow for Lead Free Solder

Note: The module is recommended not to go through reflow over twice.

7. Ordering Information

Part NO.	Working Voltage	ANT	Shielding Cover	Remark
RW8822-50B1	3.3V	2 antennas	Included	SDIO
RW8822-50B2	3.3V	3 antennas	Included	SDIO

8. Revision History

Version	Change Content	Reviser	Date
V0.1	Draft Version	Phil Ye	2022.3.31
V1.0	Initial Version	Phil Ye	2022.5.12
V1.1	Changed Pin15 description	Phil Ye	2022.5.12

Product specification

PRODUCT NAME:2.4/5GAntenna

Model :RF11C02085S

Applicant : ItonTechnologyCorp

Address : 7 Floor East, Building C, Shenzhen International Innovation
Center, No.1006 Shennan Rd. Futian Dis


Contents

1. Specification.....	3
2. Finished picture.....	4
3. Network analyzer test data.....	4
4. Efficiency.....	5
5. 3D Raditation Pattern.....	6
6. ROHS / Raw material list.....	8

1.Specification

Main technical specifications	
Frequency Range (MHZ)	2400~2500,5150-5845
Impedance(Ω)	50
Peak Gain(dBi)	3.3
VSWR	≤ 2.0
Admitted Power	1W
Polarization	Linear,Vertical
Radiation	Omni-directional
Connector Type	Cable+Connector
Physical Properties	
Antenna cover	FPC
Operating Temp	-20℃~+70℃
Storage Temp	-20℃~+70℃


2.Finished picture

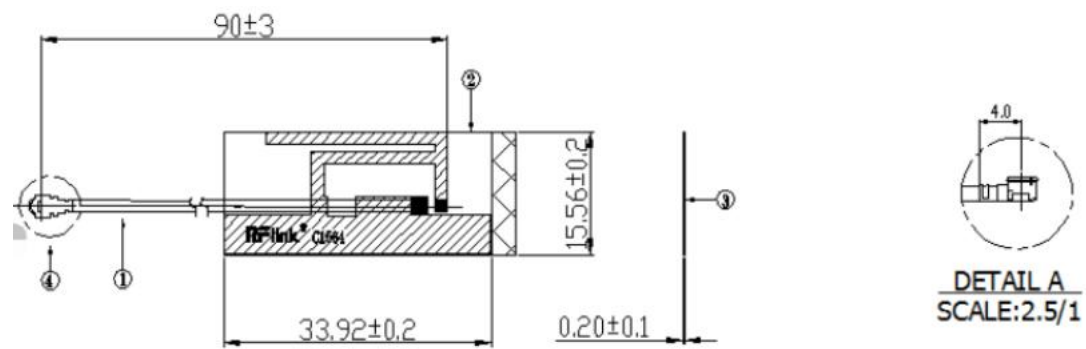


3.Network analyzer test data




4.Efficiency

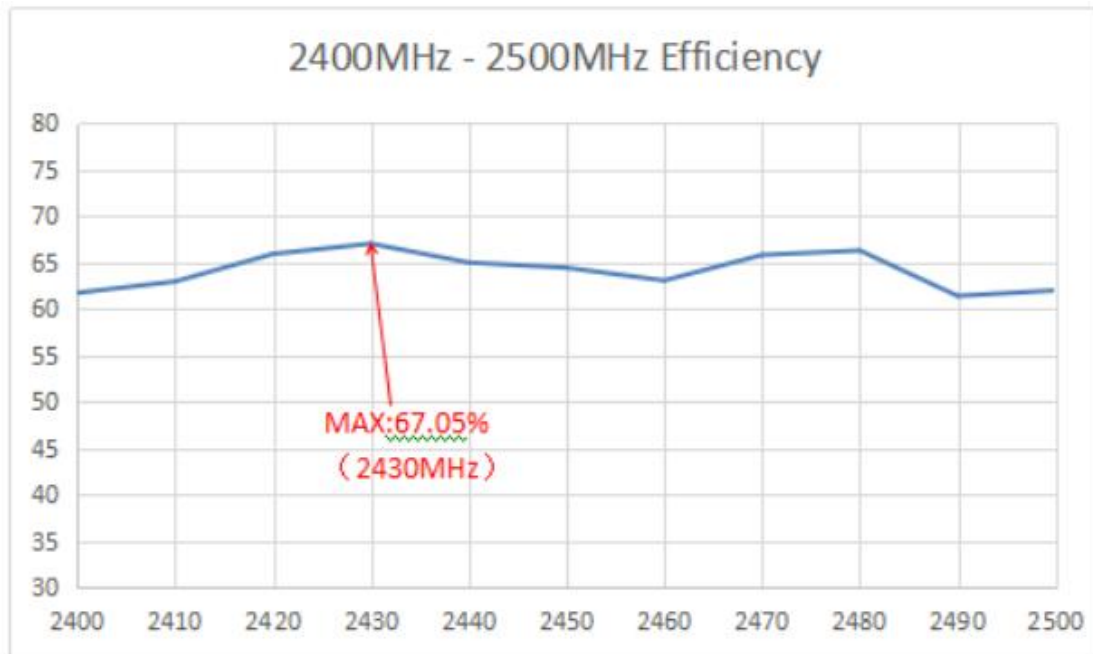




5.3D Raditation Pattern

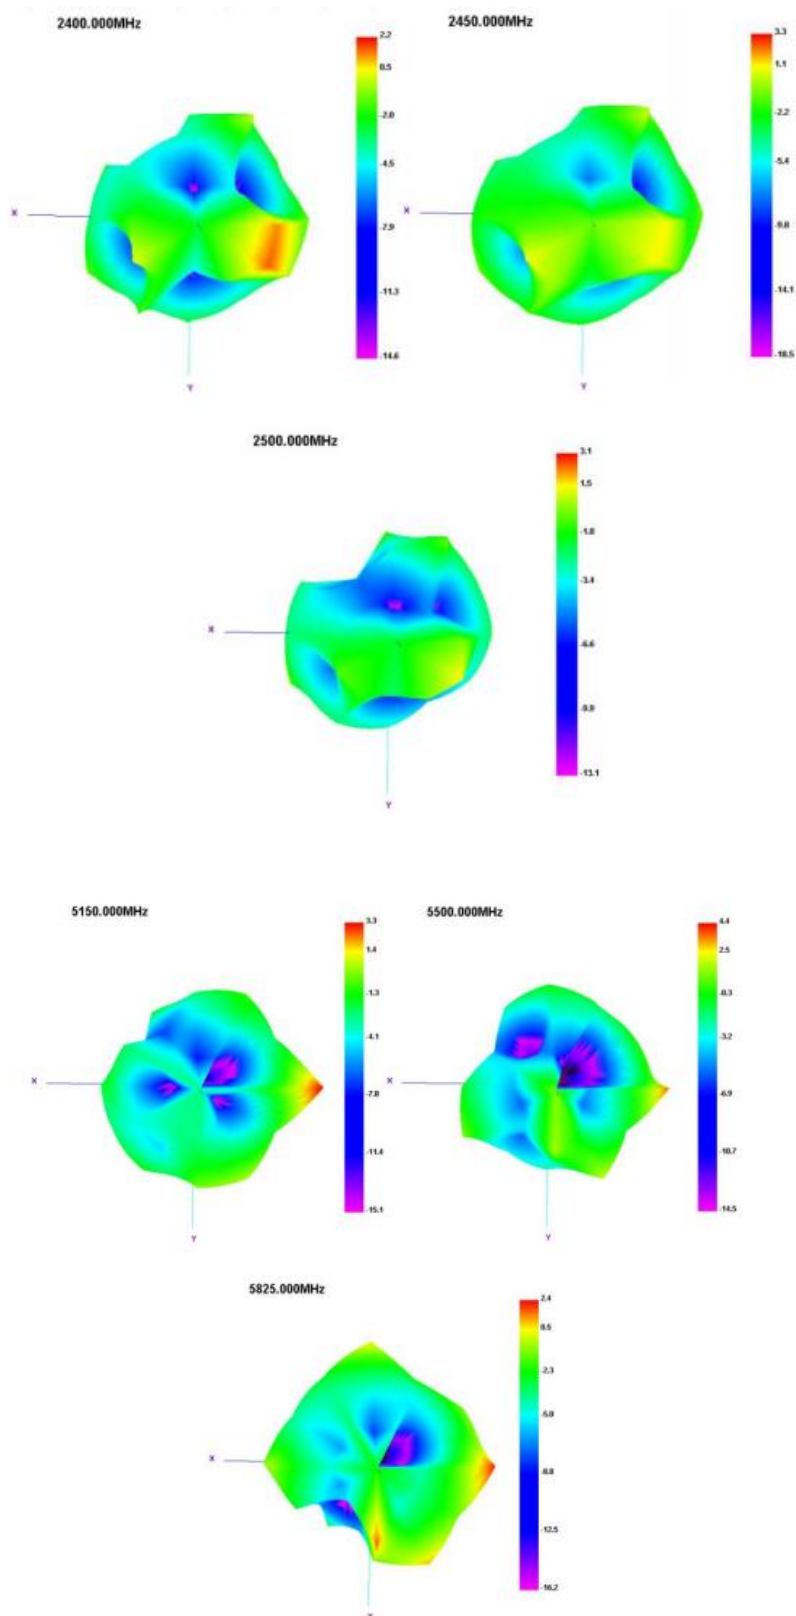


2.4G 高中低三个频点 XOZ 面 (E1 面) 增益图




5G 高中低三个频点 XOZ 面 (E1 面) 增益图



2.4G 高中低三个频点 XOY 面 (H 面) 增益图




5G 高中低三个频点 XOY 面 (H 面) 增益图



2.4G 高中低三个频点 YOZ 面 (E2 面) 增益图



5G 高中低三个频点 YOZ 面 (E2 面) 增益图

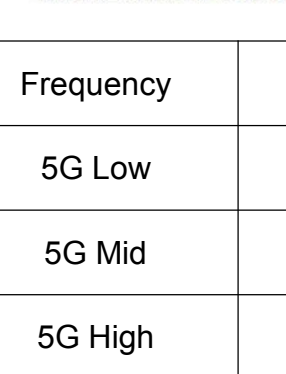

Frequency	Gain	Frequency	Gain
2.4G Low	2.2	5G Low	3.3
2.4G Mid	3.3	5G Mid	3.3
2.4G High	3.1	5G High	2.4

6.ROHS / Raw material list

RF11C02085S RoHS compliant

No.	Component Name	Raw material main material	Quantity	Unit	Material Manufacturers	UL certification No.	Remarks
1	1.13 cable	Tin plating/FPE	1	PCS	Kai Bo/Hai Lian Tong	/	
2	FPC	PI	1	PCS	Dong Zhi Yu/Ying Tong	/	
3	Connector	Copper	1	PCS	Ke Xin Cheng	/	

FCC

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

***RF warning for Mobile device:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

The OEM must certify the final end product to comply with unintentional radiators (FCC Sections 15.107 and 15.109) before declaring compliance of the final product to Part 15 of the FCC rules and regulations. Integration into devices that are directly or indirectly connected to AC lines must add with Class II Permissive Change.

The OEM must comply with the FCC labeling requirements. If the module's label is not visible when installed, then an additional permanent label must be applied on the outside of the finished product which states: "Contains transmitter module FCC ID:VYV-RW8822-50B1".

Additionally, the following statement should be included on the label and in the final product's user manual:

"This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:


- (1) This device may not cause harmful interferences, and
 - (2) this device must accept any interference received, including interference that may cause undesired operation."
- The module is limited to installation in applications. Separate approval is required for all other operating configurations, including portable configuration with respect to Part 2.1093 and different antenna configurations. A module or modules can only be used without additional authorizations if they have been tested and granted under the same intended end - use operational conditions, including simultaneous transmission operations. When they have not been tested and

granted in this manner, additional testing and/or FCC application filing may be required. The most straightforward approach to address additional testing conditions is to have the grantee responsible for the certification of at least one of the modules submit a permissive change application. When having a module grantee file a permissive change is not practical or feasible, the following guidance provides some additional options for host manufacturers. Integrations using modules where additional testing and/or FCC application filing(s) may be required are: (A) a module used in devices requiring additional RF exposure compliance information (e.g., MPE evaluation or SAR testing); (B) limited and/or split modules not meeting all of the module requirements; and (C) simultaneous transmissions for independent collocated transmitters not previously granted together. This Module is full modular approval, it is limited to OEM installation ONLY. Integration into devices that are directly or indirectly connected to AC lines must add with Class II Permissive Change. (OEM) Integrator has to assure compliance of the entire end product include the integrated Module.


Additional measurements (15B) and/or equipment authorizations (e.g. Verification) may need to be addressed depending on co-location or simultaneous transmission issues if applicable. (OEM) Integrator is reminded to assure that these installation instructions will not be made available to the end user

FPC antenna specification

You can see antenna size is 33.92mm*15.56mm* From below Specification.

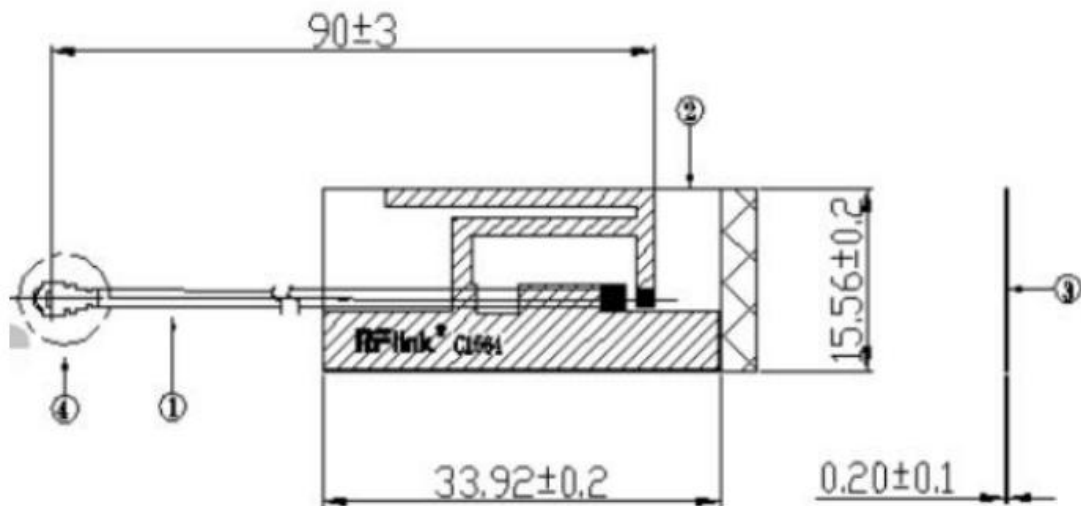

Please refer to the chart below for PCB size of RF line terminal.

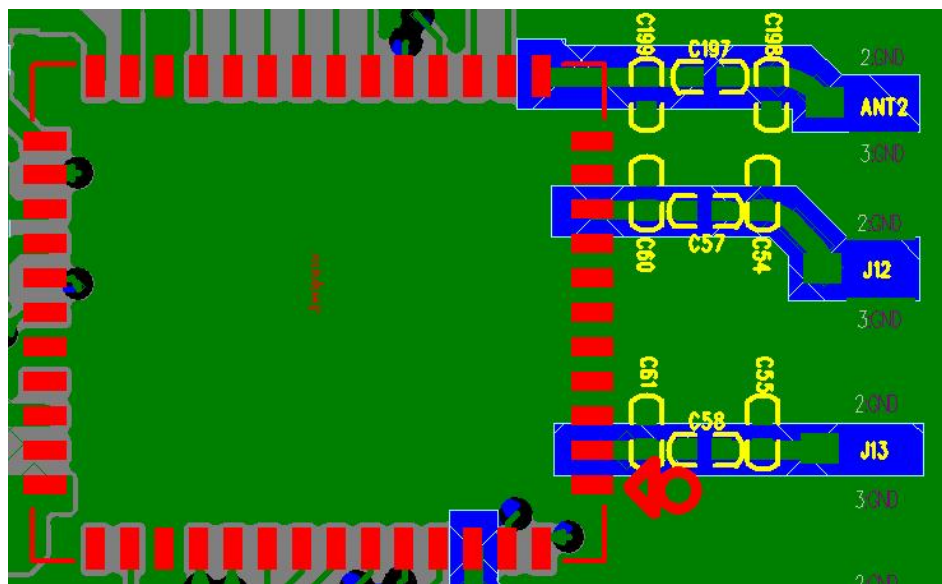

Scrape a GND off the side of the J12 ,J13 and ANT2,connect the FPC antenna to the PCB at the position of the J12 ,J13 and ANT2 connector.

[The line between the FPC antenna and the WiFi module] must be 50 ohm.

C57 ,C58 and C197 are 0R resistors.