

LUMARY SMART Wi-Fi LED DOWNLIGHT START GUIDE



LUMARY SMART DEVICE START GUIDE

Thank you for purchasing Lumary products. Ready to get started? Download the Lumary App to manage your devices straight from your phone and tablet. Easily connect to your home Wi-Fi and control multiple devices with touching fingertips. Thank you for your support, we will be dedicated to your service and continue to optimize the application and products.

Contents

Product & Notes	3
Product Installation	4
Application Connection	5-15
FAQ	16-19
Important Information	20-21
App-To-App Voice Control	22-29

Product&Notes

What's in the Box



- LUMAYR SMART Wi-Fi LED DOWNLIGHT START GUIDE




Get Ready

- Know your Wi-Fi network and password.
- Make sure your mobile device is running iOS 13.3 or higher and Android 9.0 or higher.
- Make sure you're connecting to a 2.4GHz Wi-Fi network (Lumary can't connect to 5GHz networks).

Attention

1. Do handle carefully in transportation.
2. Do not disassemble the fixture for non-professional.
3. The fixture work under AC high voltage and current, it should be installed where can't be touched easily. The connection must be completely sealed and be earthed.
4. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
5. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similarly qualified person.
6. The surface where it's positioned must be firm enough to ensure safety.
7. Ensure the voltage of the electricity system is in the range of working voltage for the fixture. Otherwise, lifetime of fixtures will be influenced.
8. Installation and maintenance should be operated by a professional.

Instruction Manual





How do I reset the device and what does the blinking light mean?

Reset the LED Downlight by pressing switch 5 times (turn on-off-on-off-on).



-Reset once [press switch 5 times (turn on-off-on-off-on)] to reach Easy Mode, which is the primary way the app will try to connect. (When in Easy Mode, you'll see the light flashing quickly, 2x per second)-Reset again [press switch (turn on-off-on-off-on till light flashing quickly, then turn on-off-on-off-on till light flashing slowly.)] to reach AP Mode, which is the Backup Mode to help connect. (When in AP Mode, you'll see the light blinking slowly, every 3 seconds).

Install the "Lumary" APP

1. Find and install the "Lumary" app on App Store, Google Play.

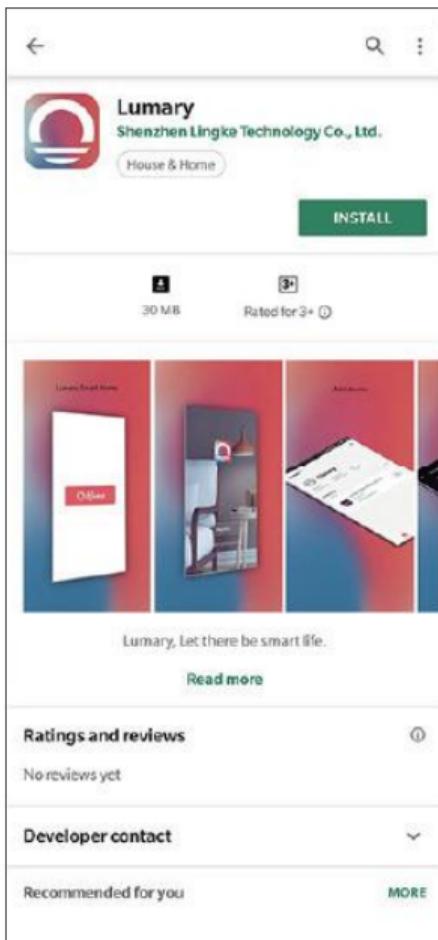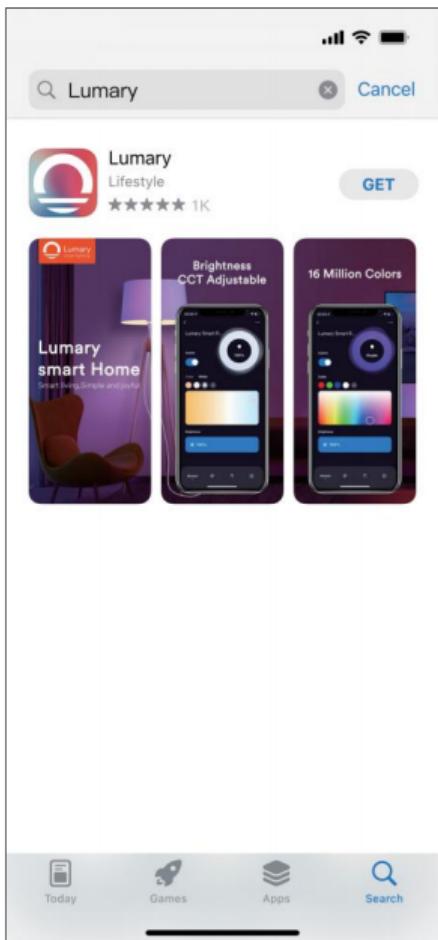

2. Register a Lumary account.

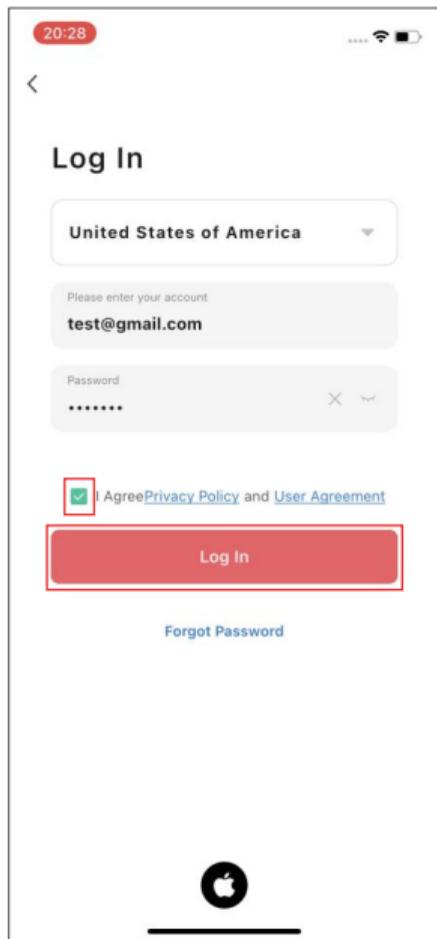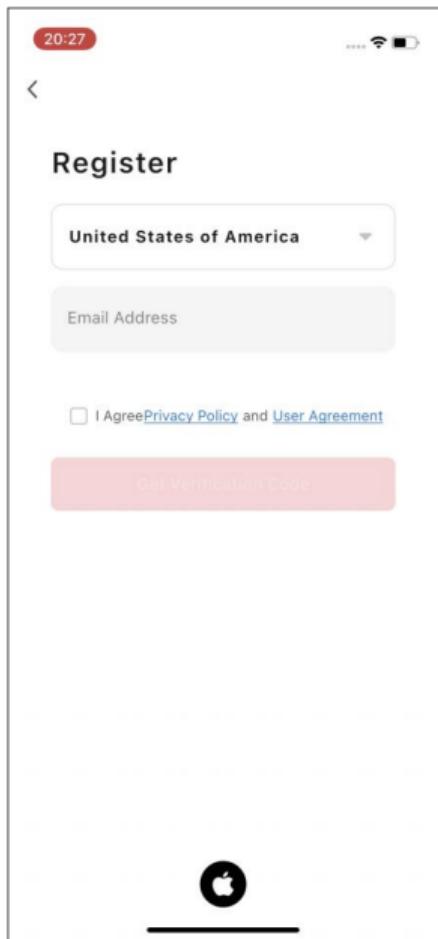


Enter your mobile phone number
or email address.

Note: Please select your region and country.

Log into the App.


3. Connect:Easy Mode.

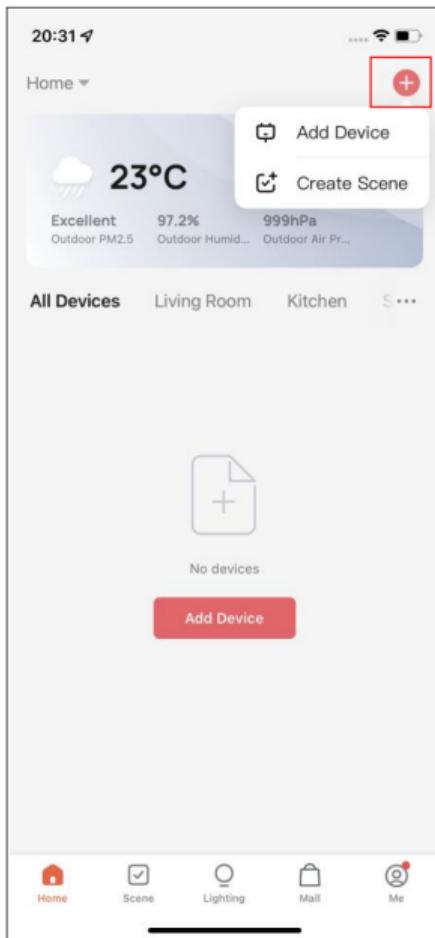

Open the Lumary App.In the top corner of the Devices screen,click(+) the Home,click "+" and "Add Device".

Choose Lighting>>Light Source(BLE+Wi-Fi)
Select upper right corner"EZ Mode".


NOTE: Lumary can't connect to 5GHz networks.
***If the connection fails, try to connect using AP Mode.**

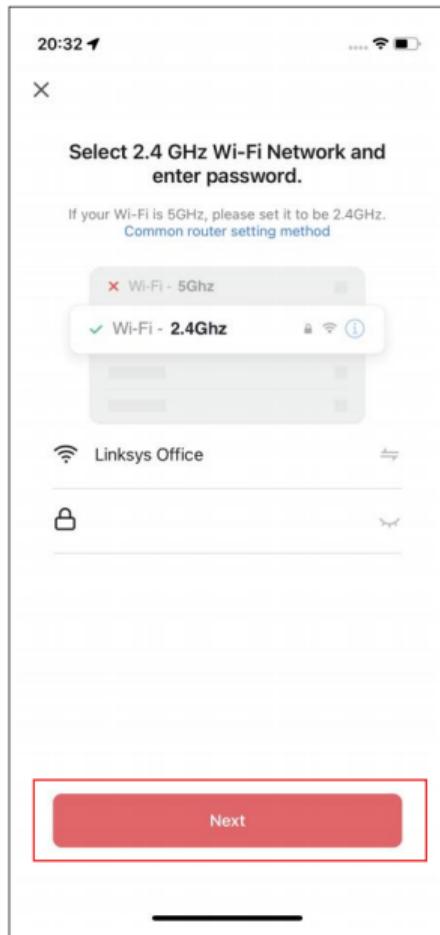

Make sure light rapidly flashing white.
if not, reset to reach Easy Mode to
connect press "Next" in the App.

Enter your Wi-Fi network
and password.



4. Connect:AP Mode

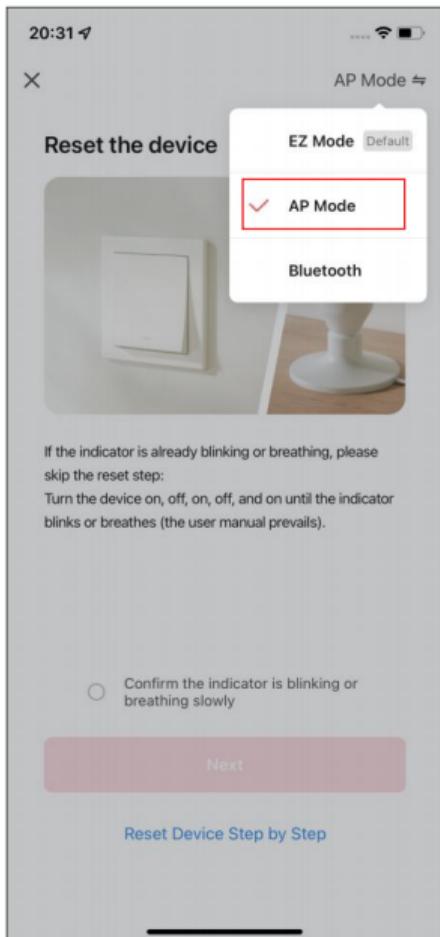

Open the Lumary App. In the top corner of the Home, click "+" choose "Light Source(BLE+Wi-Fi)". select upper right corner "AP Mode".




Make sure light is slowly flashing white. If not, reset to reach AP Mode.

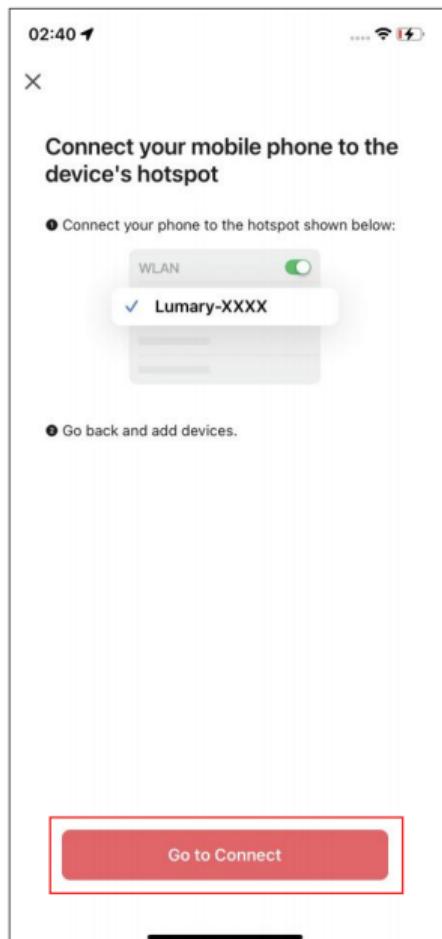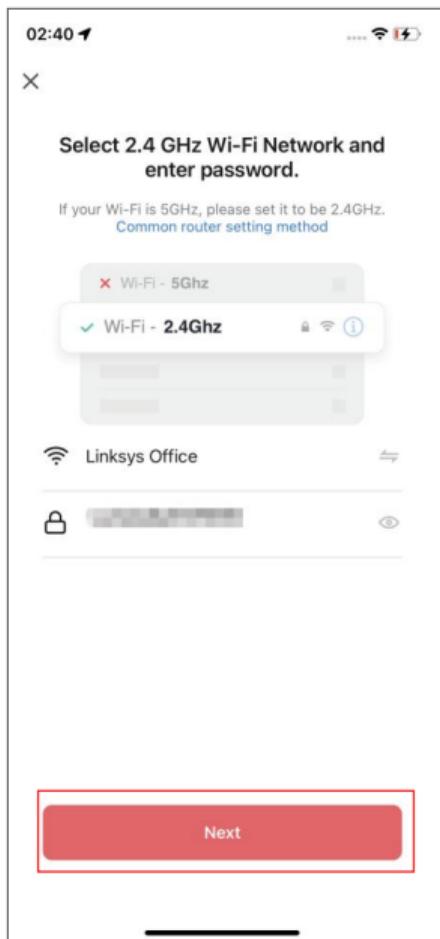


Enter your Wi-Fi network and password.

Press "Next" and enter your Wi-Fi details.

NOTE: Lumary can't connect to 5GHz networks.
*If the connection fails, try to connect using AP Mode.


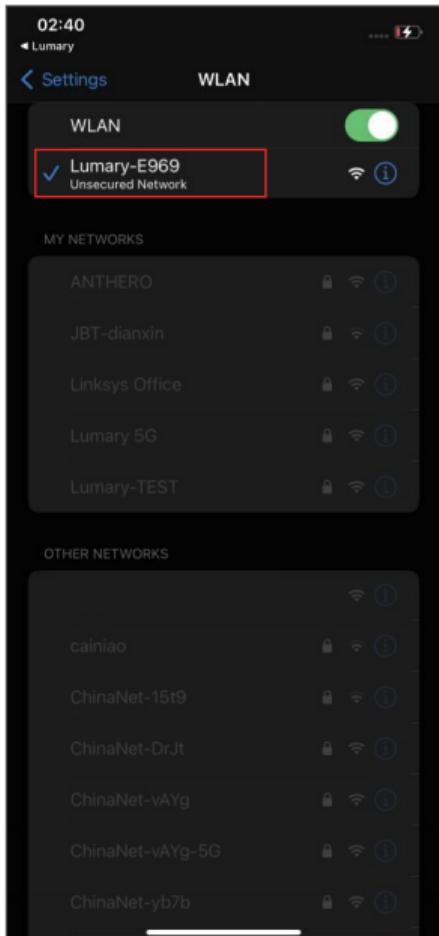


Follow the instructions to choose the device from your WiFi list.

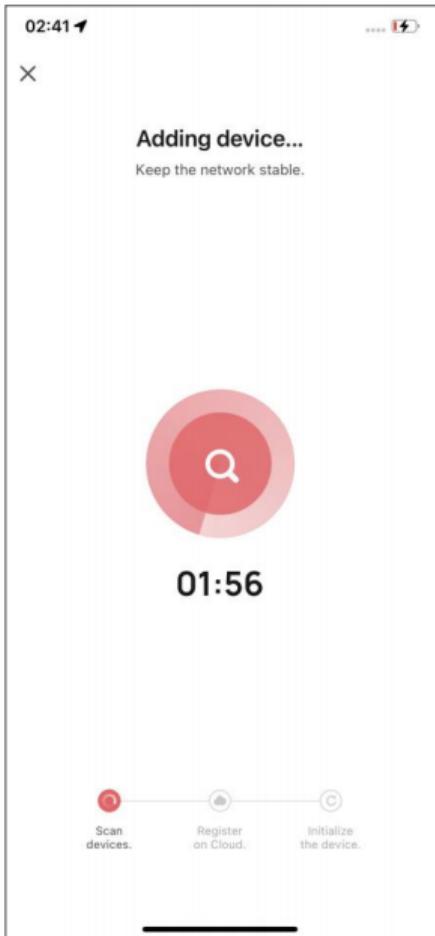

The Lumary App will connect to your devices.

5. Connect:Bluetooth

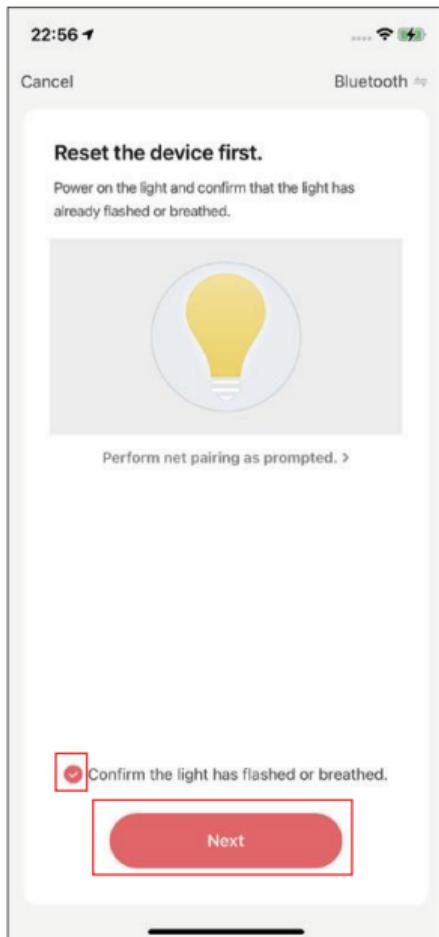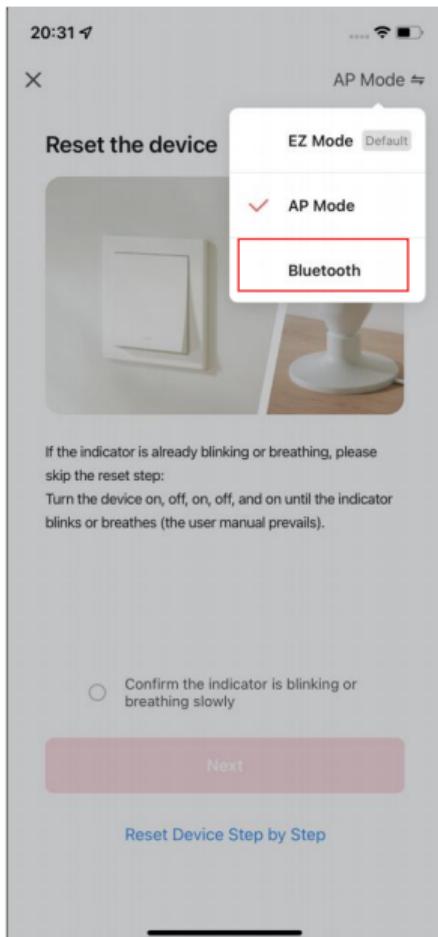


Open the Lumary App. In the top corner of the Devices screen, click "+". Choose "Light Source(BLE+Wi-Fi)". Select upper right Corner "Bluetooth".



Make sure light is rapidly flashing white. If not, reset to reach Easy Mode to connect. Press "Next" in the App.

Group Control



1. Log in to Lumary APP, tap the smart device and enter into, click "..." in the top right corner.

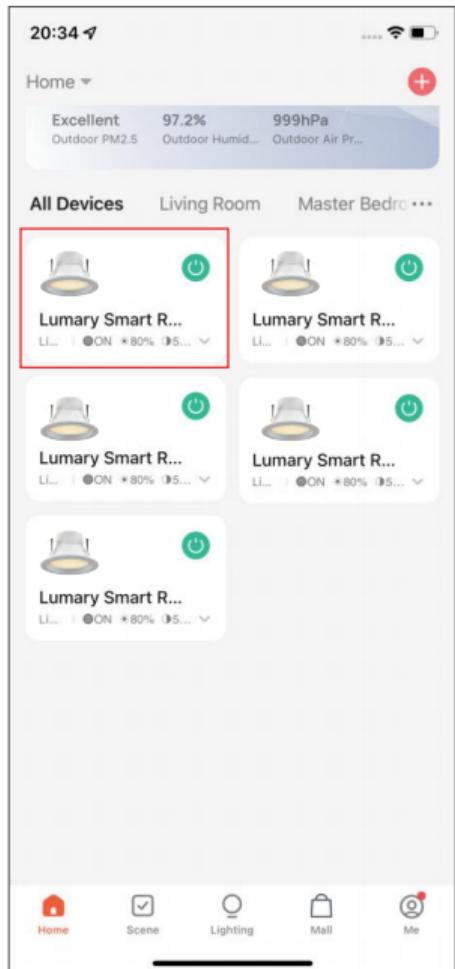

2. Click "Create Group", then select a device and save.

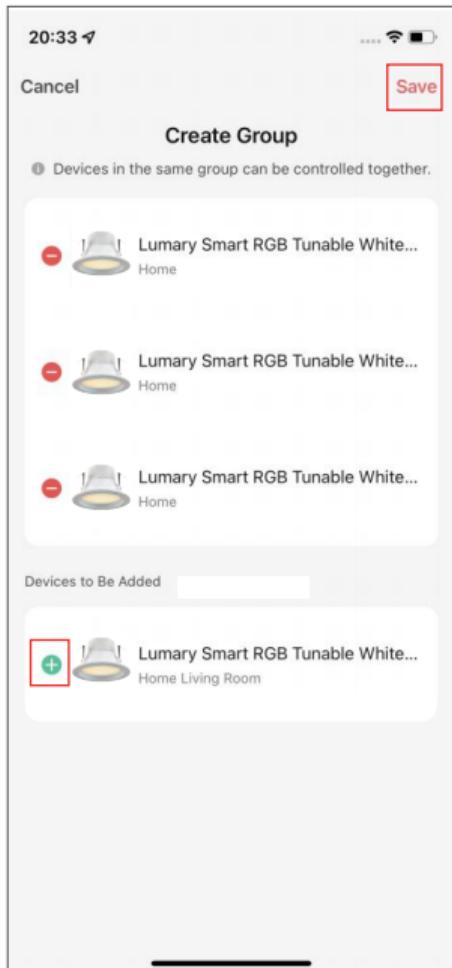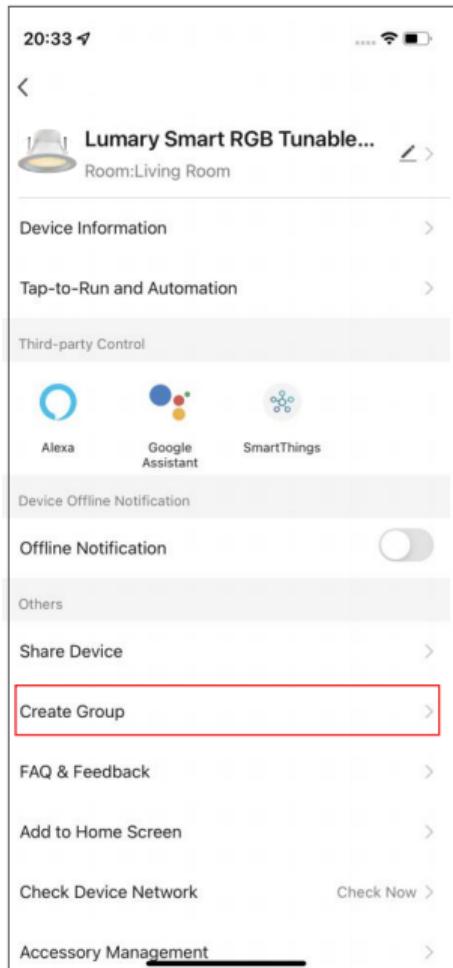

3. You can reset the group name and save it, and the group can control devices.

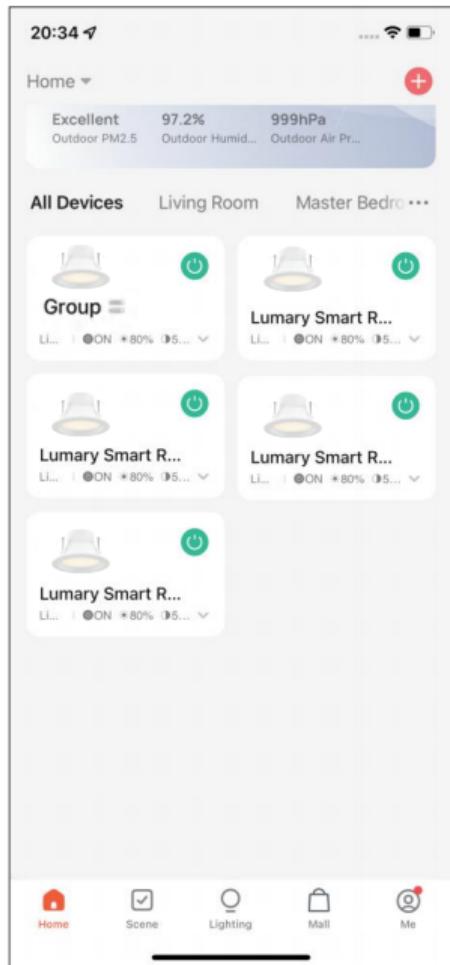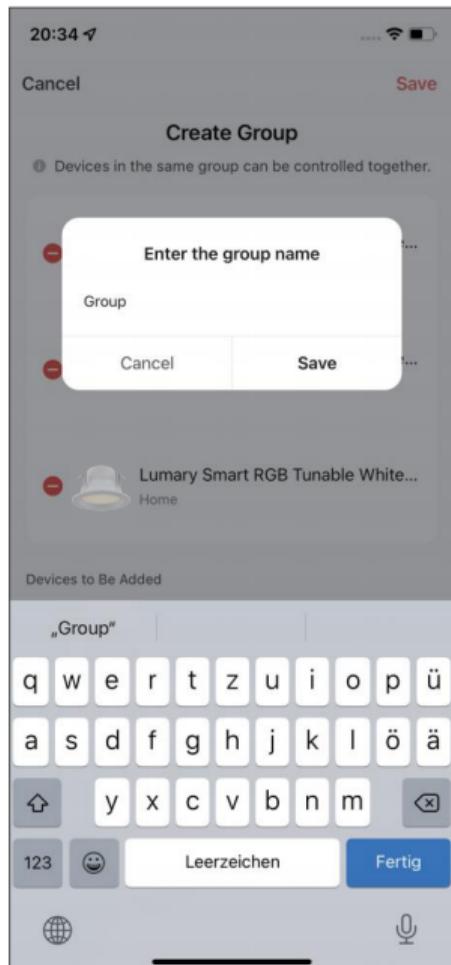

FAQ

1. What should I do, if I don't have internet access to my Lumary product?

If you do not have a network, you will need two mobile phones, one to set up the hotspot and the other to connect to the hotspot and add the device via the app (refer to the guide).

2. If my Wi-Fi internet goes down, will Lumary App still work?

Lumary products need to be connected to Wi-Fi in order to use them remotely, and the device can be controlled simply using the app via the LAN as well as Bluetooth. For example: on, off, dimming, colour temperature, colors.

3. Why does the flickering occur with Lumary products?

Lumary's products are factory set to the default network configuration. If the device has not been connected to the network, it will flash for three minutes each time it is powered on. If the device has not been connected to the network, it will flash for three minutes every time it is powered on. If the device is connected to the network, it will stop flashing and will automatically connect to the network when it is switched off and on via the wall switch after 15 seconds.

4.Can I share with family and friends?

Yes, you can share access to your Lumary devices. In the Lumary App, from your main device list, click on one of the devices press the "..." button on the top right and click on "Share Device" to give or revoke sharing permissions. In order to share, the other user should already have downloaded the Lumary App and registered an account.

5.Can I group multiple Lumary devices together?

Yes, you can group multiple same-type devices by room, location, or however else you want. The same devices can be in multiple groups. For example, if you create a group for "Bedroom" and another group for "Entire House", your Bedroom lights can be included in both groups. From your main device list, click on one of the devices you want to group, press the "..." button on the top right for advanced settings, and click "Create Group". You'll be able to name a new group and choose which devices you'd like to group together.

6.My Lumary device has a funny name. How do I rename it?

From your main device list, click on one of the devices you want to rename, press the "..." button on the top right for advanced settings, and click "Modify Device Name" (or "Modify Group Name"). You'll then be able to choose a more familiar name. It will connect to the network when it is switched off and on via the wall switch after 15 seconds.

7.What's the wireless range?

The range of your home Wi-Fi is heavily dependent on your home router and the conditions of the room. Check with your router specifications for exact range data.

8.What should I do if the device Appears offline or is unreachable?

Make sure your Wi-Fi router is online and in range, and check that you have the latest Lumary functionality by clicking "Check for firmware update" in your device settings. Try to turn off the device >> clear the application cache >> reboot the router >> turn on the device after one minute and check and confirm the device status after five minutes.

9.How many devices can I control?

- The maximum number of timers that can be added to a single device: 30
- Maximum number of devices that can be added in a single home: 120
- The maximum number of Tap-to-Run that a single home can create: 100
- Maximum number of Automation that can be created in a single home: 100
- The maximum number of tasks that can be added in a Tap-to-Run: 150
- The maximum number of tasks that can be added in an Automation: 150
- The maximum number of conditions that can be added in an Automation: 10
- The maximum number of mobile devices that can simultaneously log in to an account is: 200
- The maximum number of Homes that can be created by a single App account is: 20
- The maximum number of home members that can be added in a single home is: 20

- The maximum number of rooms that a single home can create is: 20
- The maximum number of devices that can be added in a single room is: 50
- The maximum number of devices that can be added in a single device group is: 100
- The maximum number of device groups that a single home can create is: 20
- The maximum number of each device group that can be shared with other users is: 20
- The maximum number of each device that can be shared with other users is: 20
- The maximum number of each App account that can be invited by other homes is: 20

10.What should I do,when I find a problem with the purchased product?

Please email us (support@lumary.tech) with your Amazon order ID. We are dedicated to ensuring your 100% satisfaction. Rest assured if the problem is with this product, we'll be more than happy to exchange it for a new one immediately.

11.How do I reset the device?

If the device is connected to the network, press and hold the control button for 5s, the indicator light or light will flash rapidly and enter the network state.

To reconnect to Wi-Fi, Reset the device through the wall switch, on - off - on - off - on

- Reset once (press switch on - off - on - off - on) to reach Easy Mode, indicated by rapidly blinking white light. Refer to connect in Easy Mode.
- Reset again (press switch on - off - on - off -on) to reach AP Mode, indicated by slowly blinking white light. Refer to connect in AP Mode.

Important Information

Troubleshooting

Can't connect to your Wi-Fi network.

Make sure you entered the correct Wi-Fi password during the Wi-Fi setup.

Check whether there are any Internet connection problems. If the Wi-Fi signal is too weak, reset your Wi-Fi router and try again.

Parameter information

Name	Lumary Smart Recessed Downlight
Model	US-DL4/6B-1/2/4/8/12
Input Voltage	100-130VAC,60Hz
Wattage	9W/13W
Color Temperature	RGB +Tunable White(2700K-6500K)
CRI	80
Lumens	810lm/1100lm
Beam Angle	100°
Rated Life	25000h



FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.



VOICE CONTROL GUIDE

Name and Control Each Device by Voice




Voice Control Quick Guide for Amazon Alexa

1. Log in to Lumary APP, tap the smart device and enter into, click "✍" in the top right corner.
2. Tap "Alexa" in Third-party Control.
3. Tap "Sign In With Amazon".

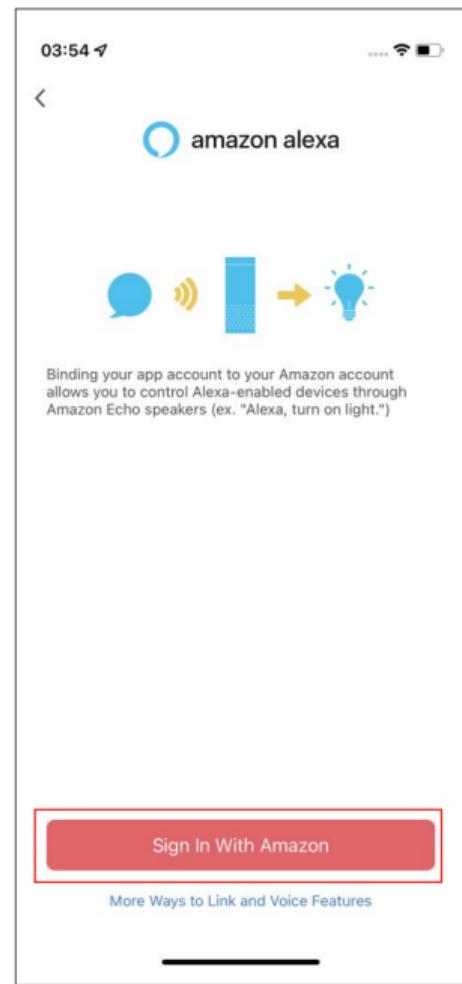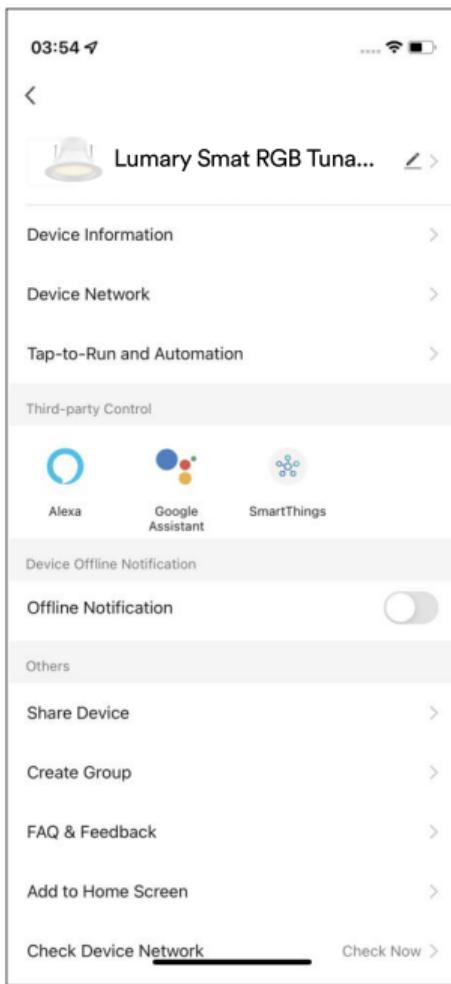

4. Tap "Allow".

5. Linked successfully, when add new device, there is no need to link again, just discover new device in Alexa.

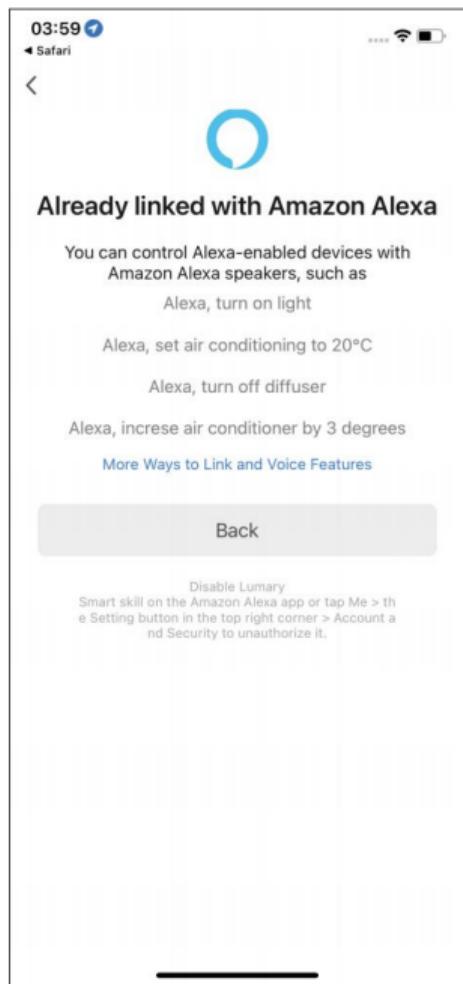



To control your Lumary smart device, just ask Alexa.

Make sure your devices are already set up using the Lumary app.

Things you can say*:

"Alexa, discover my devices."

"Alexa, turn on the bedroom light."

"Alexa, set the bedroom light to orange."

"Alexa, turn off the coffee machine."



"Alexa, set the living room to 50%."

"Alexa, dim porch light."

*Some commands require compatible devices.



Voice Control Quick Guide for Google Assistant

1. Log in to Lumary app, tap the smart device and enter into, click "✍" in the top right corner.
2. Tap "Google Assistant" in Third-party Control.
3. Tap "Link with Google Assistant".

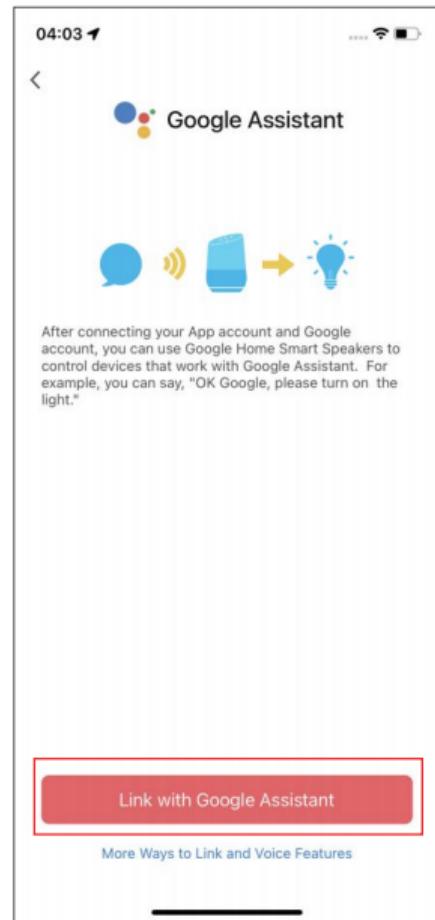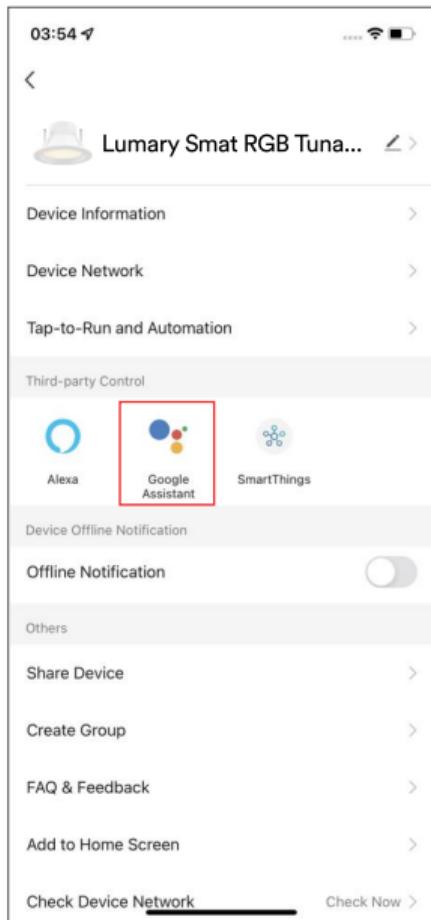

4. Click "Agree and link".

5. Linked successfully, when add new device, there is no need to link again, just discover new device in Google Home.

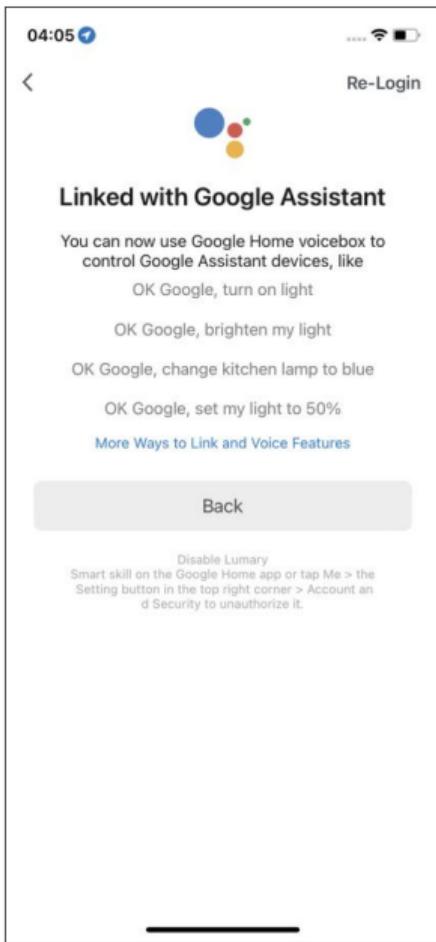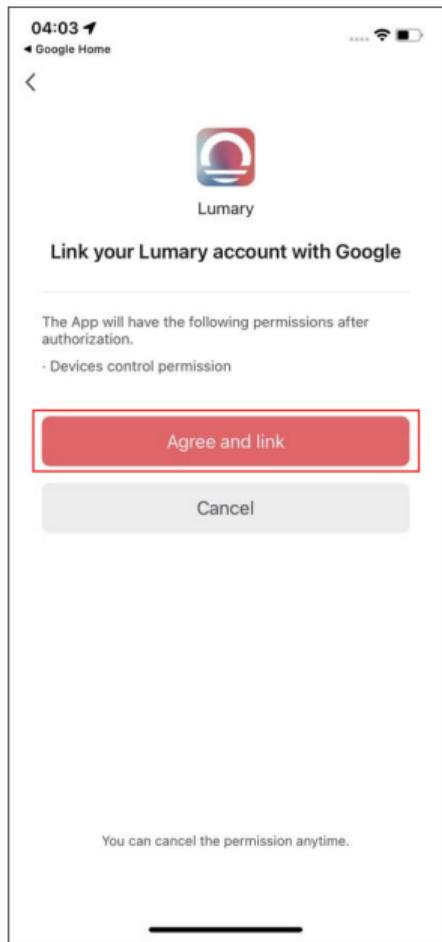



To control your Lumary smart device, just say "Hey Google", and ask.

Make sure your devices are already set up using the Lumary app.

Things you can say*:

"Hey Google, turn on all the lights in my bedroom."

"Hey Google, turn off the light."

"Hey Google, set the bedroom light to orange."

"Hey Google, turn off the coffee machine."

"Hey Google, set the living room to 50%."

"Hey Google, dim porch light."

*Some commands require compatible devices.

If you have any questions about use and operation, you can contact us!

Customer Service Email:

support@lumary.tech

You can also search for our "account name" and "enter URL" on social media platforms or directly scan the following QR code to find us quickly.

- Facebook: US-Smart Home
(<https://www.facebook.com/lumary.tech>)
- YouTube: Lumary Official
(<https://www.youtube.com/channel/UCcEQnWxockzsPwyPOfSppug>)
- Instagram: lumary Smart Home
(<https://www.instagram.com/lumarysmarthome/>)
- Twitter: Lumary @Lumarysmarthome
(<https://twitter.com/Lumarysmarthome>)
- Pinterest: Lumary Smart Home
(<https://www.pinterest.com/LumarySmartHome/>)



Facebook



Youtube



Instagram



Twitter



Pinterest

Can't connect? Need help?



WE
CAN
HELP

HAVING AN EASY TALK TO US BEFORE YOU RETURN
THE PRODUCT WILL FIX A PROBLEM MORE QUICKLY

Lumary support:
support@Lumary.tech

Visit us at: www.lumary.tech