


5.5.4.5.2 Changing the content of settings 1(PRESET1)


- (1) When PRESET1 is selected from CUSTOM items and the "ENT" key is pressed, the PRESET1 screen (See chart below) appears.
 - (2) Select items with up-down keys and contents with left-right keys. The selected items will be enclosed by square frames and the contents will appear in reversed display. (a)
- Repeat this operation when multiple settings are to be made.

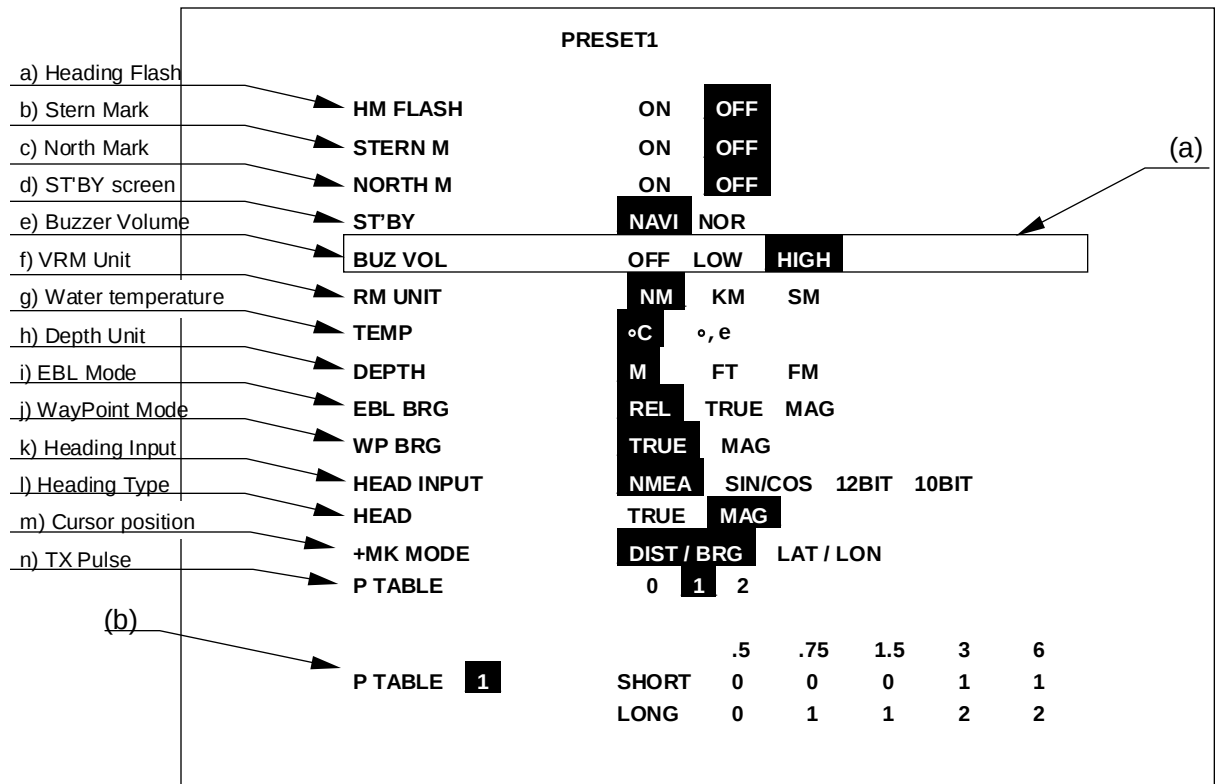

- (3) After the setting is completed, exit from the PRESET1 screen with the "ENT" key.

Note) The contents will be displayed in (b) together with the numbers selected in P TABLE.

- • Heading Flash on
Each revolution of the antenna turns the heading marker on and off.
- b) Stern Mark
Display / non-display of the stern line
- c) North Mark
Display / non-display of the north mark
- • ST'BY screen
Setting the screen display in stand-by
NAVI: Navigation Data screen
NOR: Normal screen
- e) Buzzer Volume
Setting the volume of the buzzer

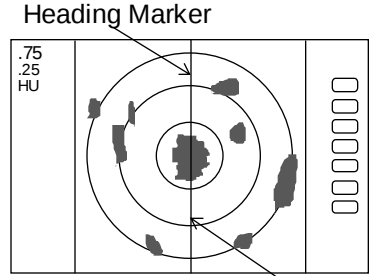- • VRM Unit Setting VRM unit
- • NM: Nautical mile
 - • KM: Kilometer
 - • SM: Statute mile
- g) Water temperature Setting water temperature unit
- °C: Celsius
 - F: Fahrenheit
- 
- h) Depth Unit Setting Depth unit
- M: Meter
 - FT: Feet
 - FM: Fathom
- i) EBL Mode Setting Mode of EBL
- REL: Relative bearing from HM
 - TRUE: True bearing
 - MAG: Magnetic bearing
- j) WayPoint Mode Setting WayPoint bearing mode
- TRUE: True bearing
 - MAG: Magnetic bearing
- k) Heading Source Setting Heading source;
- NMEA
 - SIN/COS: Compass Data with SIN/COS signal
 - 12BIT: Compass Data with 12bits serial signal
 - 10BIT: Compass Data with 10bits serial signal
- l) Heading Type Heading Information Type setting
- MAG: Magnetic bearing
 - TRUE: True bearing
- m) Cross cursor position display Mode
- DIST/BRG: Range and Bearing indication
 - LAT/LON: Latitude and Longitude indication
- n) Transmitting pulse width Pulse setting for Range (Note:)

Note: P TABLE

P TABLE 0	PUSLE TYPE	•0.25 NM	0.5 NM	0.75 NM	1.5 NM	3 NM	6 NM	•12 NM
	SHORT	0	0	0	0	0	1	2
	LONG	0	0	0	1	1	2	2

P TABLE 1	SHORT	0	0	• 0	0	1	1	2
	LONG	0	0	1	1	2	2	2

P TABLE 2	SHORT	0	0	0	1	1	1	2
	LONG	0	1	1	2	2	2	2

Note • RA40C Pulse width 0 : 0.12 uS, 1 : 0.3 uS, 2 : 0.8 uS
 PA41X/42X Πυλσεωιδη 0 : 0.08 uS, 1 : 0.25 uS, 2 : 0.8 uS

