


Remote Control Outlets

Operating Instructions

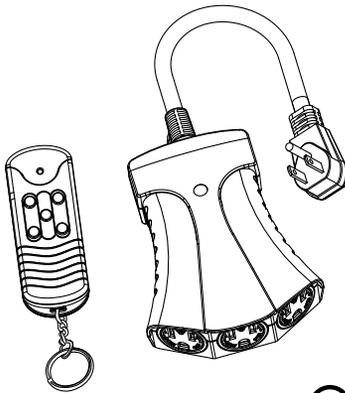

- FOR INDOOR OR OUTDOOR USE -

1

IMPORTANT SAFEGUARDS

Signal Word Definitions

NOTE: These are general definitions only; all may not pertain to the actual product purchased.

DANGER - Indicates an imminently hazardous situation, which, if not avoided, will result in death or serious injury. Usage of this signal word is limited to the most extreme situations.

WARNING - Indicates a potentially hazardous situation, which, if not avoided, could result in death or serious injury.

CAUTION - Indicates a potentially hazardous situation, which, if not avoided, may result in minor/moderate injury or product/property damage. It also alerts against unsafe practices.

When using electrical products, always follow basic safety precautions including the following:



READ ALL INSTRUCTIONS BEFORE USE.

WARNING

Choking Hazard— Small parts.
Not for children under 3 years.

WARNING-- To reduce the risk of fire, electric shock, or serious personal injury:

- Do not immerse the product in water or other liquids.
- This product is not intended for use by children and contains small parts that may pose a choking hazard to children under the age of three. Keep the product out of the reach of children and pets.
- Do not use an electrical device or appliance with this product whose electrical specifications exceed those specified in the "Electrical Specifications" section of this manual.

CAUTION-- To reduce the risk of personal injury or product/property damage:

- This product is intended for non-commercial, non-industrial use in the remote control of two electrical outlets. Do not use this product for any other purpose.

2

WARNING: This product is equipped with a three-prong grounding pin plug to reduce the risk of electric shock. This plug will fit into a grounded outlet only one way. This is a safety feature. Never use the plug with an extension cord unless you can fully insert the plug into the extension cord. Do not alter the plug. Do not attempt to defeat the safety purpose of the grounding plug.



IMPORTANT INFORMATION REQUIRED BY THE FCC

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

MODEL : TR-010
FCC ID : PAGTR-010

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

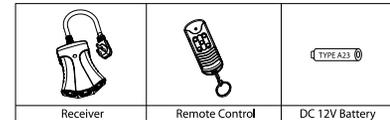


3

INSTALLATION:

- Mount or hang the RECEIVER on the wall near a wall grounded electrical 120V 60Hz outlet which the power supply cord of the RECEIVER will plug in to.
- Plug the cord of the device you wish to control remotely at the bottom of the RECEIVER.
- The heat dissipation hole of the bottom must be stuck on the wall closely.
- The device must be mounted in an attitude that the heat dissipation openings at the bottom enclosure shall be stuck on the wall closely and in a vertical position with the receptacle facing downward and with the receptacles at least 2 feet (610 mm) above the ground level not for water immersion.

Operation:

- Function A - Fading: 3 outlets turn light fading rotational by each outlet (turn off by function E)
- Function B - Chasing: 3 outlets turn light ON/OFF rotational by every 2 outlets (turn off by function E)
- Function C - Flashing: 3 outlets turn light ON/OFF by sec for flashing Event (turn off by function E)
- Function D - Dancing: Cyclic repeat function A to C (turn off by function E)
- Function E - Switch: Turn 3 outlets power ON/OFF as regular remote



Battery Handling and Usage

WARNING: Keep batteries away from children and pets.

- Follow the battery manufacturer's safety and usage instructions.
- Insert the battery observing the proper polarity (+/-) as indicated inside the Battery Compartment.
CAUTION: Failure to properly align the battery polarity can cause personal injury and/or property damage.
- Remove a spent or discharged battery from the product. Remove the battery when not using the product for an extended period.
- Never throw batteries into a fire. Do not expose batteries to fire or other heat sources.
- Dispose or recycle spent/discharged batteries in compliance with all applicable laws. For detailed information, contact your local solid waste authority.

4

Battery Replacement:

- Remove the Battery Compartment Cover from the back of the Remote Control by sliding the Cover in the direction that its treads curve.
- Remove the spent battery and place a new DC 12V Type A23 battery into the Battery Compartment, correctly observing the polarity indications (+/-) inside the Battery Compartment.
- Replace the Battery Compartment Cover.

Electrical Specifications

Voltage	Frequency	Wattage
125VAC	60Hz	1000W

*Maximum combined wattage for items using a tungsten bulb plugged into the Receiver is 1000W. Each receptacle is limited to 333W

Item #A14G0846
WC #533299

©2008 All Rights Reserved

UL is a registered trademark of Underwriters Laboratories Inc. and is used under license.

Distributed By:
East West Distributing Co.
Deerfield, IL 60015-4616

Made in China

5