


---

---

## ORIENTATION

---

---

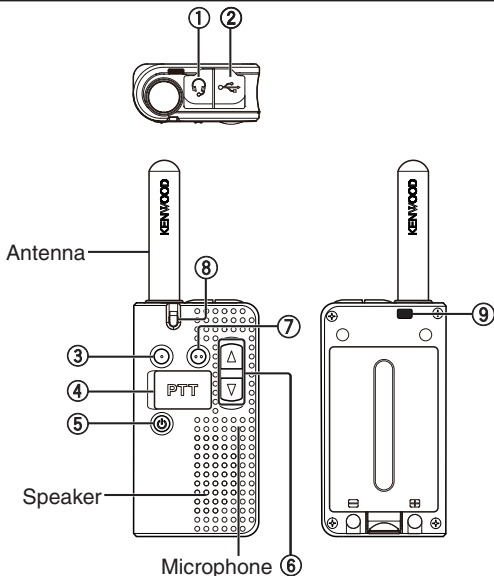

### ① Phone jack (3.5mm)

Connect the earphone/microphone plug to this jack.

### ② Micro USB jack (B Type)

Connect a USB cable to this jack to charge the transceiver battery pack.

### ③ Function key-1

Press and hold this key for 1 second to activate its programmable function.

The default settings are **[Scan]**(press) and **[Super Lock]** (hold).

- For function descriptions and details on how to change the function of the Function key-1, refer to “KEY ASSIGNMENT MODE”.

#### ④ **PTT (Push to Talk) switch**

Press and hold, then speak into the microphone to transmit.

#### ⑤ **Power switch**

Hold for 1 second to turn the transceiver power ON.

Hold for 2 seconds to turn the transceiver power OFF.

Momentarily press this key while the transceiver power is ON to activate the Battery Level Guide. Refer to the Battery Level Guide table.

#### ⑥ **Up/Down key**

Press these keys to adjust the volume, change the channel,

- To change the operating frequency or QT/DQT settings of a channel, refer to “CHANNEL SETUP MODE”.

#### ⑦ **Function key-2**

Press this key to change the function of the Up/Down keys as follows:

Volume Adjustment mode → Channel Select mode.

Hold this key for 1 second to activate its programmable function.

The default setting is **[Monitor]**.

- For function descriptions and details on how to change the function of the Function key-2, refer to “KEY ASSIGNMENT MODE”.

#### ⑧ **LED indicator**

Refer to the LED Indicator Status table.

#### ⑨ **Strap hole**

Connect a commercially available strap here.