

# 正面

LA CROSSE®  
TECHNOLOGY

## TH sensor



MODEL: TX147


DC: 083120

For more product information visit: [bit.ly/laxtech\\_support](http://bit.ly/laxtech_support)


### POWER UP

1. Install 2 “AAA” batteries into your Outdoor Sensor.
2. Install 2 “AAA” batteries into your Wireless Thermometer.
3. Once the sensor is reading to your station, place it outside in a shaded location to protect it from the sun’s heat.

See our mounting information: [bit.ly/th\\_sensor\\_mounting](http://bit.ly/th_sensor_mounting)



TX147  
Outdoor Sensor



308-147  
Wireless Thermometer

### BUTTON FUNCTIONS

|          |   |
|----------|---|
|          | Hold to enter Settings Menu.<br>Press the <b>+</b> button to adjust settings.   |
| <b>+</b> | Press to view HI/LO Temperatures.<br>When viewing HI/LO records; hold to reset records.<br>Hold to search for Outdoor Sensor. |

### SETTINGS

1. Hold the button to enter the Settings Menu.
2. Use **+** button to adjust and the button to confirm and exit.

#### Settings Menu Order:

- 12/24 Hour Format


- Hour

- Minutes

- Fahrenheit or Celsius

### HI/LO TEMPERATURE RECORDS

Press the **+** button to view the HI then the LO Temperature Records. These records are from midnight to midnight.

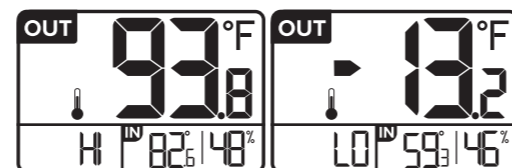

#### Reset HI/LO Records:

While viewing the HI or LO Temperature Records, hold the **+** button to reset all records.

# 反面

### SEARCH FOR OUTDOOR SENSOR

- Hold the **+** button to search for the Outdoor Sensor.
- The Reception Indicator will flash until the sensor signal is received, if no signal is available the search will stop after 3 minutes.
- The Reception Indicator will show solid on screen when the sensor is connected.

### RESTART

When the outdoor readings show dashes:

1. Bring the sensor about five feet from the thermometer.
2. Remove batteries from the sensor, and from the thermometer.
3. Press any button 20 times.
4. After 15 minutes insert batteries into the sensor, and into the thermometer.
5. Wait 15 minutes to establish a strong connection. Place sensor outside in shaded location.

### LOW BATTERY INDICATOR

- When Battery Indicator shows next to outdoor temperature, replace batteries in the Outdoor Sensor.
- When Battery Indicator shows next to the indoor temperature, replace batteries in the thermometer.

### WE’RE HERE TO HELP!

If you require additional support, get in touch with our friendly customer support team based out of La Crosse, WI.

Phone: 1-608-782-1610

Online: [bit.ly/contact\\_techsupport](http://bit.ly/contact_techsupport)

Our knowledgeable customer support team is available:  
Monday-Friday, 8am-6pm CST.

### JOIN THE CONVERSATION

Ask questions, watch detailed setup videos, and provide feedback on our social media outlets!



### SPECIFICATIONS

#### WIRELESS THERMOMETER (308-147)

- Indoor Temperature Range: 32°F to 99°F (0°C to 37°C)
- Indoor Humidity: 10% RH to 99% RH
- Power Requirements: 2 “AAA” Batteries (not included)
- Battery Life: Over 12 months
- Dimensions: 2.76” L x 0.91” W x 2.78” H (7.0cm L x 2.3cm W x 7.05cm H)

#### OUTDOOR SENSOR (TX147)

- Temperature Range: -40°F to 140°F (-40°C to 60°C)
- Transmission Range: 330 ft (100 m) open air RF 433MHz
- Transmission Interval: Every 51 seconds.
- Power Requirements: 2 “AA” Batteries (not included)
- Battery Life: Over 12 Months
- Dimensions: 2.57” L x 0.78” W x 2.6” H (6.52cm L x 1.98cm W x 6.6cm H)

### WARRANTY INFO

La Crosse Technology, Ltd. provides a **1-year limited time warranty** (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.  
La Crosse Technology, Ltd. 2830 S. 26th St., La Crosse, WI 54601  
For Full Warranty Details, Visit: [www.lacrossetechnology.com/pages/warranty](http://www.lacrossetechnology.com/pages/warranty)

### CARE + MAINTENANCE

- Do not mix old and new batteries.
- Do not mix Alkaline, Lithium, standard, or rechargeable batteries.
- Always purchase the correct size and grade of battery most suitable for intended use.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries have with correct polarity (+ / -).
- Remove batteries from equipment that will not to be used for an extended period.
- Promptly remove expired batteries.

### FCC STATEMENT/CANADA STATEMENT.

This device complies with part 15 of the FCC Rules/ Canada Industry licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d’industrie Canada applicables aux appareils radio exempts de licence L’exploitation est autorisée aux deux conditions suivantes:

- 1) l’appareil ne doit pas produire de brouillage; et
- 2) l’utilisateur de l’appareil doit accepter/brouillage radioélectrique subi même si le brouillage est susceptible d’encombrer le fonctionnement, mauvais fonctionnement de l’appareil.

Warning: Changes or modifications to this unit not expressly approved by the part responsible for compliance could void the user’s authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to ISED Rules/ part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

FCC/ IC Radiation Exposure Statement  
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

**WARNING:** This product can expose you to chemicals including styrene, which is known to the State of California to cause cancer. For more information go to: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)