

WIRELESS LIGHT SWITCH

MODEL: 425


FEATURES

- Wireless control socket, no wiring, easy to install.
- Wireless control any light, maximum load up to 300 watts
- Receiver with night light function
- Wireless remote control up to 100 feet away
- Single 12V battery (size 23A)(included)operation of remote control unit, long battery life.
- Wall mount or adhesive any where of remote control unit.

PHYSICAL SPECIFICATION

Remote control unit

1. ON/OFF switch:
send the wireless signal to control the receiver for ON or OFF load.
2. Wall bracket
3. Wall mount screws
4. Adhesive
5. Battery (23A size)

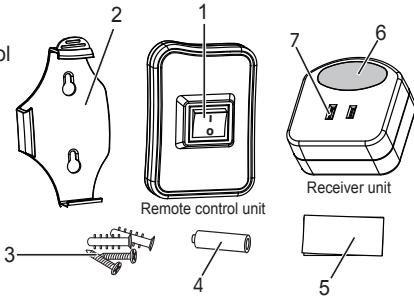

Receiver unit

6. Night light
7. Load socket

ELECTRICAL SPECIFICATION

- Power supply: 12V battery (23A) operation
- Battery life (40mAh alkaline battery):
Standby more than 8 months (ON/OFF 8 times per day).

ENVIRONMENTAL SPECIFICATION


- Operation temperature: 0~40°C
- Storage temperature: -10°C - +60°C
- Operation humidity: <80%

size: 105x150mm
p/n: 610-4250x-000R
white paper print black words

FUNCTIONAL SPECIFICATION

Remote control unit

1. Battery install
Sliding the battery door to open it(fig.1), inset a 12V battery (include) make sure the polarity, replace the battery door.
2. Wall mount the remote control unit
 - a. Wall mount: remove the remote switch from the wall bracket(fig.2).
 - b. Select permanent location for the remote switch.
 - c. Mark the screw hole location with the pencil.
 - d. Using a screwdriver, screw the enclosed screws into the wall, be sure it is secure prior to place the remote switch into the bracket.
3. Adhesive install the remote control unit
 - a. Remove the remote switch from the wall bracket.
 - b. Remove the protective tape from one side of the removable adhesive.
 - c. Adhere the exposed side of the adhesive to the remote switch
 - d. Remove the protective tape from the opposite side of the adhesive.
 - e. Select your location for your remote switch and press into place.



Notes:

- a. Cut a small piece off of the reusable adhesive and test in a discrete location prior to use.
- b. Apply to surfaces above 50°F(10°C), adhesive could soften and lose adhesion above 105°F(40°C).
- c. For best adhesion clean surface with isopropyl rubbing alcohol, wipe lightly, let dry. Do not use household cleaners on surface before adhesion

Receiver unit

1. Plug the receiver onto wall AC socket, the blue night light indicates the unit is correctly installed and power is available. Be sure the remote switch is in the off position.
2. The remote control unit has a single ON/OFF switch. Flip the switch up to turn the receiver socket power on or flip the switch down to turn the socket power off.
3. When the receiver power on the night light will be to off.

For proper operation and safety

- Use only one remote control unit per AC socket.
- Do not overload the AC socket beyond 300 watts. Maximum output load:
120V/60Hz 300W.
- The AC socket should not be used to power extension cords and power strips where multiple devices can be powered.

- For indoor use only.

CAUTION:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes of modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

610-4250x-000R