

PRODUCT SPECIFICATION

802.11a/b/g/n/ac 2Tx2R USB WLAN Module

WCBN3507R(12)

User Manual

CONTENT

PRODUCT FEATURES	7
WI-FI FEATURE	7
COMMON FEATURE.....	8
PRODUCT SPECIFICATIONS.....	9
MAIN CHIPSET	9
RECOMMENDED OPERATION CONDITIONS.....	12
DC CHARACTERISTICS.....	12
POWER ON SEQUENCE TIMING.....	12
PIN ASSIGNMENT.....	13
FOOTPRINT.....	13
MECHANICAL	14
I-PEX CONNECTOR SPEC.....	15
EEPROM INFORMATION	16
WI-FI.....	16
ENVIRONMENTAL	16
OPERATING	16
STORAGE.....	16

FCC Statement:

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- gReorient or relocate the receiving antenna.
- gIncrease the separation between the equipment and receiver.
- gConnect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- gConsult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

This device and its antenna(s) must not be co-located with any other transmitters except in accordance with FCC multi-transmitter product procedures.

Referring to the multi-transmitter policy, multiple-transmitter(s) and module(s) can be operated simultaneously without C2PC.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

IMPORTANT NOTE:

This module is intended for OEM integrator. The OEM integrator is responsible for the compliance to all the rules that apply to the product into which this certified RF module is integrated.

Additional testing and certification may be necessary when multiple modules are used.

20 cm minimum distance has to be able to be maintained between the antenna and the users for the host this module is integrated into. Under such configuration, the FCC radiation exposure limits set forth for an population/uncontrolled environment can be satisfied.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

USERS MANUAL OF THE END PRODUCT:

In the users manual of the end product, the end user has to be informed to keep at least 20 cm separation with the antenna while this end product is installed and operated. The end user has to be informed that the FCC radio•frequency exposure guidelines for an uncontrolled environment can be satisfied. The end user has to also be informed that any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment. If the size of the end product is smaller than 8x10cm, then additional FCC part 15.19 statement is required to be available in the users manual: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following " Contains TX FCC ID: PPQ- WCBN3507R12 ". If the size of the end product is larger than 8x10cm, then the following FCC part 15.19 statement has to also be available on the label: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

OEM Integrator Checklist

The party below will implement the LITE-ON Module in host systems in accordance with the instructions specified in this document and the documents referenced herein.

1. The OEM integrator will ensure the Module is integrated in a host systems using only the approved antenna model(s) described in this document.
2. The OEM integrator will ensure the antenna placement inside the host system will maintain the required spacing to end user for RF Exposure compliance, as specified in this document.
3. If other radios are integrated inside the host with the LITE-ON Module, the OEM integrator will contact its test lab, TCB or LITE-ON to determine if additional FCC compliance evaluation is required to meet FCC collocation rules.
4. The OEM integrator will ensure end user documentation will contain the specified regulatory wording and ensure the host system and the Module itself are labeled as specified in this document.
5. The OEM integrator will ensure the Module is programmed in the factory with compliant transmit power not exceeding the levels specified in this document.

LITE-ON requests that the OEM integrator acknowledge its receipt of this document and the above instructions. You may contact LITE-ON with any questions concerning this document or the responsibilities of the OEM integrator.

IC Statement:

This device complies with Industry Canada license•exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

For product available in the USA/Canada market, only channel 1~11 can be operated.

Selection of other channels is not possible.

Pour les produits disponibles aux États-Unis / Canada du marché, seul le canal 1 à 11 peuvent être exploités. Sélection d'autres canaux n'est pas possible.

This device and its antenna(s) must not be co-located with any other transmitters except in accordance with IC multi-transmitter product procedures.

Referring to the multi-transmitter policy, multiple-transmitter(s) and module(s) can be operated simultaneously without reassessment permissive change.

Cet appareil et son antenne (s) ne doit pas être co-localisés ou fonctionner en association avec une autre antenne ou transmetteur.

The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

les dispositifs fonctionnant dans la bande 5150•5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

The maximum antenna gain permitted for devices in the band 5725•5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate.

le gain maximal d'antenne permis (pour les dispositifs utilisant la bande 5725•5850 MHz) doit se conformer à la limite de p.i.r.e. spécifiée pour l'exploitation point à point et non point à point, selon le cas.

Dynamic Frequency Selection (DFS) for devices operating in the bands 5250• 5350 MHz, 5470•5600 MHz and 5650•5725 MHz.

Sélection dynamique de fréquences (DFS) pour les dispositifs fonctionnant dans les bandes 5250•5350 MHz, 5470•5600 MHz et 5650•5725 MHz.

The maximum antenna gain permitted for devices in the bands 5250•5350 MHz and 5470•5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit.

le gain maximal d'antenne permis pour les dispositifs utilisant les bandes 5250•5350 MHz et 5470•5725 MHz doit se conformer à la limite de p.i.r.e.

Users should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250•5350 MHz and 5650•5850 MHz and that these radars could cause interference and/or damage to LE•LAN devices.

De plus, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c. à d., qu'ils ont la priorité) pour les bandes 5250•5350 MHz et 5650•5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN•EL.

Pour une utilisation en intérieur uniquement.

IMPORTANT NOTE:

IC Radiation Exposure Statement:

This equipment complies with IC RSS•102 radiation exposure limits set forth for an uncontrolled

environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

This module is intended for OEM integrator. The OEM integrator is still responsible for the IC compliance requirement of the end product, which integrates this module.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

USERS MANUAL OF THE END PRODUCT:

In the users manual of the end product, the end user has to be informed to keep at least 20 cm

separation with the antenna while this end product is installed and operated. The end user has to be

informed that the IC radio•frequency exposure guidelines for an uncontrolled environment can be

satisfied. The end user has to also be informed that any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this

equipment. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received,

including interference that may cause undesired operation.

LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following " Contains TX IC: 4491A-WCBN3507R12 ".

PRODUCT FEATURES

WI-FI FEATURE:

- Operate at ISM frequency Band (2.4/5GHz)
- IEEE Standards Support, 802.11a ,802.11b, 802.11g, 802.11n and 802.11ac
- Support for both 20 MHz and 40 MHz channel width
- Enterprise level security supporting: WPS2.0,WAPI, WPA, WPA2
- Support 2 transmission and 2 receiving, transmission rate can up to 300Mbps (Physical Rate) in downstream and upstream
- Dual-stream IEEE 802.11ac support for 80MHz channels provides PHY layer rates up to 867Mbps
- QoS support of WFA WMM, WMMPS
- Support for WI-Fi Direct
- Support Wake On WLAN

COMMON FEATURE:

- MT7612U is a single chip integrated IEEE 802.11 a/b/g/n/ac
- PA, LNA, and T/R switch integration for Wi-Fi
- Best-in-class active and idle power consumption performance
- Fully compliance with USB v2.0 specification
- Support OS: Linux based
- RoHS compliance
- Low Halogen compliance

PRODUCT SPECIFICATIONS

MAIN CHIPSET

Wi-Fi Function	
Standard	IEEE802.11a; IEEE802.11b; IEEE 802.11g; IEEE 802.11n. IEEE802.11ac
Bus Interface	
	USB2.0
Data Rate	802.11a: 54, 48, 36, 24, 18, 12, 9, 6 Mbps
	802.11b: 11, 5.5, 2, 1 Mbps
	802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps
	802.11n: MCS 0 to 15 for HT20MHz MCS 0 to 15 for HT40MHz
	802.11ac: MCS 0 to 8 for HT20MHz MCS 0 to 9 for HT40MHz MCS 0 to 9 for HT80MHz
Media Access Control	
	CSMA/CA with ACK
Modulation Technique	802.11a: 64QAM, 16QAM, QPSK, BPSK
	802.11b: CCK, DQPSK, DBPSK
	802.11g: 64QAM, 16QAM, QPSK, BPSK
	802.11n: 64QAM, 16QAM, QPSK, BPSK
	802.11ac: 256QAM, 64QAM, 16QAM, QPSK, BPSK
Network Architecture	
	Infrastructure mode
Operation Channel	2.4GHz 11: (Ch. 1-11) – United States 13: (Ch. 1-13) – Europe 14: (Ch. 1-14) – Japan
	5GHz 21: USA 19: EU 8: Japan
	802.11bg 2.400 ~ 2.4835 GHz
Frequency Range	
	802.11a 5.15 ~ 5.85 GHz
EVM	CCK < 35%
	OFDM < -25dB
	MCS7(20MHz) < -28dB
	MCS7(40MHz) < -28dB MCS9(80MHz) < -32dB

Frequency Offset	2.4&5GHz -20ppm < Center Frequency < +20ppm	
Receiver Sensitivity	802.11a: -86 dBm@6Mbps -70 dBm@54Mbps	
	802.11b: -88 dBm@1Mbps -82 dBm@11Mbps	
	802.11g: -86 dBm@6Mbps -71 dBm@54Mbps	
	802.11n: 2.4G/5G 20MHz -86 dBm@MCS0 -70 dBm@MCS7 -68 dBm@MCS15	
	40MHz -83 dBm@MCS0 -67 dBm@MCS7 -65 dBm@MCS15	
	802.11ac: 20MHz -64 dBm@MCS8	
	40MHz -62 dBm@MCS8 -59 dBm@MCS9	
	80MHz -59 dBm@MCS8 -56 dBm@MCS9	
	Security	WPS, WPA, WPA2, WEP 64bit & 128bit, IEEE 802.1X, IEEE 802.11i



Operating Voltage 3.3 V ±10% I/O supply voltage

Power Consumption	<i>Mode</i>	<i>Average</i>		<i>Peak</i>	
		<i>2.4G</i>	<i>5G</i>	<i>2.4G</i>	<i>5G</i>
	<i>TX</i>	440mA	450mA	650mA	850mA
<i>RX</i>	300mA	480mA			
<i>Unassociated Idle</i>	40mA				

Antenna Type Dual U.FL connectors for WiFi




RECOMMENDED OPERATION CONDITIONS

Symbol	Rating	Min	Typ	Max	Units
VDD33	3.3V Supply Voltage	2.97	3.3	3.63	V
VDD12	1.2V Supply Voltage	1.14	1.2	1.26	V
VDD15	1.5V Supply Voltage	1.425	1.5	1.575	V

DC CHARACTERISTICS

Symbol	Parameter	Min	Typ	Max	Units
V _{IL}	Input Low Voltage	-0.28	-	0.6	V
V _{IH}	Input High Voltage	2.0	-	3.63	V
V _{OL}	Output Low Voltage	-0.28	-	0.4	
V _{OH}	Output High Voltage	2.4	-	3.63	V

POWER ON SEQUENCE TIMING

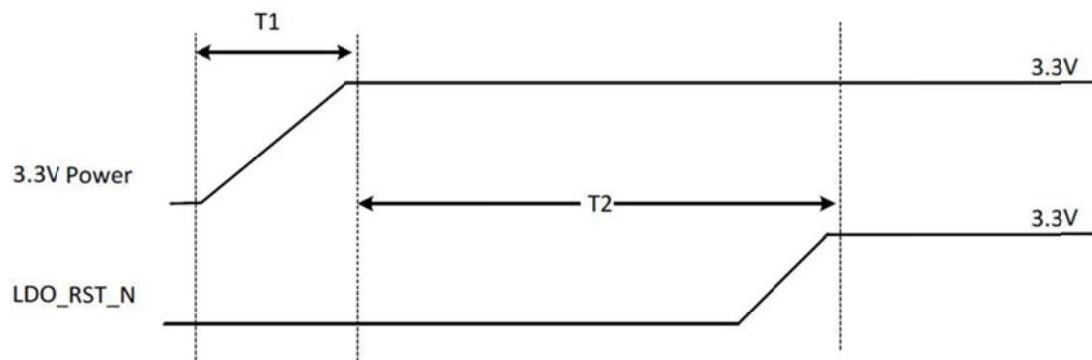


T1: max. 3.5ms
T2 > 0 (LDO_RST_N must be asserted after 3.3V ready)

PIN ASSIGNMENT

Pin.	Pin Define	Description	Status
1	+3.3V	3.3V source	YES
2	+3.3V	3.3V source	YES
3	USB_D-	USB Data-	YES
4	USB_D+	USB Data+	YES
5	GND	Ground	YES
6	RESET#	System reset MT7612U, low active	YES
7	WoWLAN#	Wake up system via wifi, low active	YES
8	GND	Ground	YES
9	WoBT	Wake up system via BT, low active	NC
10	GND	Ground	YES
11	GND	Ground	YES
12	GND	Ground	YES
13	GND	Ground	YES
14	GND	Ground	YES


FOOTPRINT

Top View

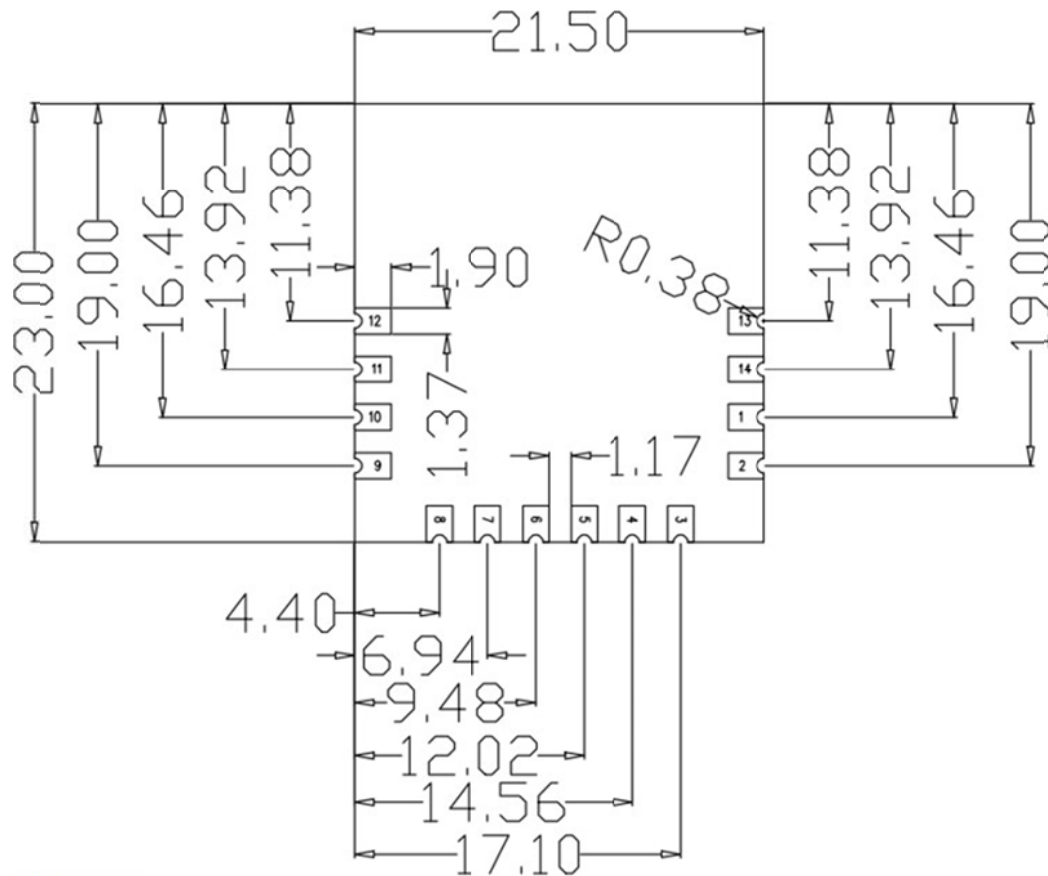

Unit:mm

MECHANICAL

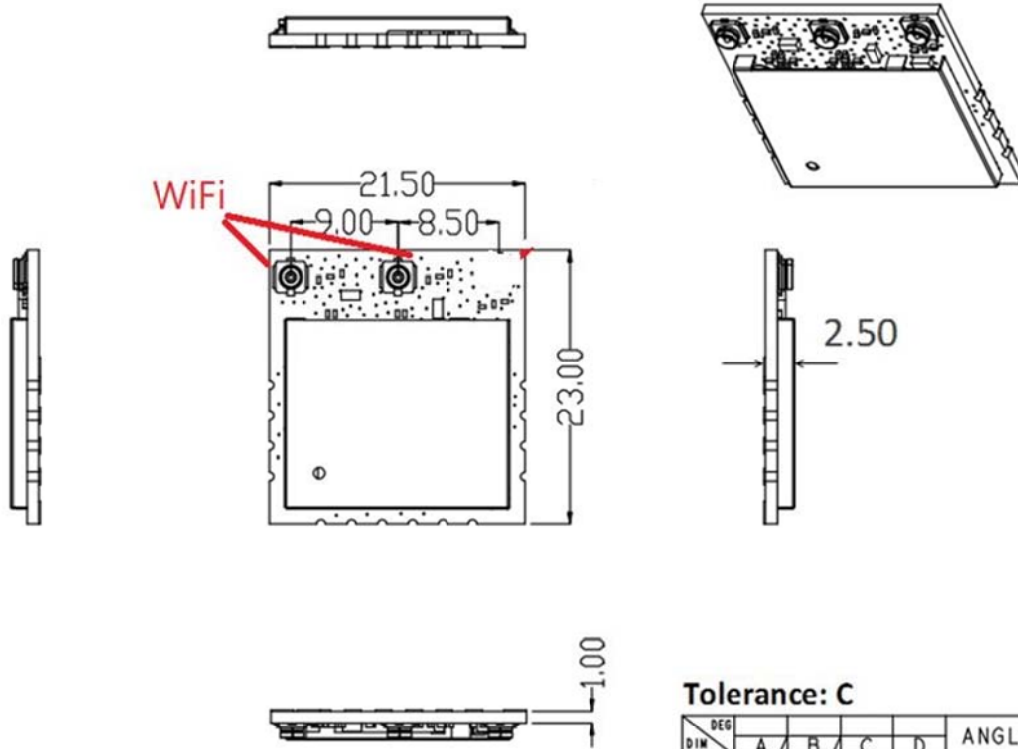

Tolerance: C

DEG	A	B	C	D	ANGLE
DIM					
0-5	±0.05	±0.05	±0.10		0°-30° ±0.1°
5-10	±0.05	±0.10	±0.15		31°-60° ±0.3°
10-50	±0.10	±0.15	±0.20		61°-90° ±0.5°
50-100	±0.15	±0.20	±0.25		
100-	±0.15	±0.20	±0.25		

Unit: mm

I-PEX CONNECTOR SPEC

<p>PART NO. 20431-001E-01</p>			<p>Mating</p> <p>Plug P/N 20278-1-1R-08, 13, 32 20351-1-1R-37</p> <p>4.0±0.4 at 20278-1-1R-08, 13, 32 Plug 4.7±0.4 at 20278-1-1R-18 4.7±0.4 at 20351-1-1R-37</p>							
	<p>Cut out prohibition area パターン禁止エリア</p> <p>Recommended footprint pattern</p>	<p>Plug P/N 20311-011R-08</p>	<p>Notes</p> <p>1. Material (1)ハウジング: LCP, UL94V-0, 白色 (2)コンタクト: 黄銅 Au 0.1µm MIN. over Ni 1.27µm MIN. (3)グラウンドコンタクト: 白銅 Au 0.05µm MIN. over Ni 1.27µm MIN.</p> <p>2. Coplanarity: 0.1mm MAX. 3. Packing: emboss tape 4. Mating partner part No. : 20278-1-1R-08, 13, 32 : 20311-011R-08 : 20351-1-1R-37 5. This is 'Pb-free' connector. 6. RoHS compliant</p>							
<p>GENERAL TOLERANCE</p> <p>6 MAX. ±0.2</p> <p>6 OVER MAX. 30 ±0.3</p> <p>30 OVER MAX. 120 ±0.5</p> <p>ANGLE ±2°</p>	<p>Sect. X-X S=20/1</p>	<table border="1"> <tr> <td>DESIGN D BY K.Obayashi</td> <td>DATE 04/18/05</td> <td rowspan="2"> <p>I-PEX Interconnect and Packaging Electronics TOKYO, JAPAN</p> </td> </tr> <tr> <td>CHK'D BY</td> <td>DATE</td> </tr> <tr> <td>REV. ENCL BY REV. RECORD</td> <td>DATE 2014</td> <td> <p>TITLE MHF series micro coaxial connector receptacle vertical 4 pads type</p> <p>PROJECTION SCALE UNIT DWG. No. SHEET REV. 10/1 mm 20431 1/1 0</p> </td> </tr> </table>	DESIGN D BY K.Obayashi	DATE 04/18/05	<p>I-PEX Interconnect and Packaging Electronics TOKYO, JAPAN</p>	CHK'D BY	DATE	REV. ENCL BY REV. RECORD	DATE 2014	<p>TITLE MHF series micro coaxial connector receptacle vertical 4 pads type</p> <p>PROJECTION SCALE UNIT DWG. No. SHEET REV. 10/1 mm 20431 1/1 0</p>
DESIGN D BY K.Obayashi	DATE 04/18/05	<p>I-PEX Interconnect and Packaging Electronics TOKYO, JAPAN</p>								
CHK'D BY	DATE									
REV. ENCL BY REV. RECORD	DATE 2014	<p>TITLE MHF series micro coaxial connector receptacle vertical 4 pads type</p> <p>PROJECTION SCALE UNIT DWG. No. SHEET REV. 10/1 mm 20431 1/1 0</p>								

EEPROM INFORMATION**Wi-Fi**

Reg Domain	World Wide 2.4G/5G Read from registry; Control by driver
	Offset 0x38 for 5G: 0xFF Offset 0x39 for 2.4G: 0xFF
Vendor ID	0x0E8D
Device ID	0x76A0

ENVIRONMENTAL**OPERATING**

Ambient Operating Temperature: 0 to 70 °C (32 to 158 °F)

Ambient Relative Humidity: 5-90% (non-condensing)

STORAGE

Ambient Temperature: -40 to 80 °C (-40 to 176 °F)

Ambient Relative Humidity: 5-95% (non-condensing)