

# **USER MANUAL**

**802.11a/b/g/n/ac 2Tx2R+BT5.0 USB WLAN Module**

**WCBN3509R, WCBN3509R(AU)**

## PRODUCT FEATURES

### BT FEATURE:

- Bluetooth V5.0 system
  - Backwards compatible with BT version of 1.1, 1.2, 2.0, 2.1, 3.0+HS and 4.0LE
- Bluetooth Class I transmission power
- Support for Simple Pairing (SP) and Enhanced Inquiry Response (EIR) function
- Support for SCATTERNET and up to 7 piconets simultaneously with background inquiry/page scan
- Up to 7 BT link + 32BLE link
- Support wide-band speech and hardware accelerated SBC codec for A2DP streaming
- Packet loss concealment
- Channel quality driven data rate adaptation
- Support Wake On Bluetooth

### WI-FI FEATURE:

- Operate at ISM frequency Band (2.4/5GHz)
- IEEE Standards Support, 802.11a ,802.11b, 802.11g, 802.11n and 802.11ac
- Support for both 20 MHz, 40MHz and 80 MHz channel width in 2.4GHz and 5GHz band
- Enterprise level security supporting: WPS2.0,WAPI, WPA, WPA2
- Support 2 transmission and 2 receiving, transmission rate can up to 300Mbps (Physical Rate) in downstream and upstream
- Dual-stream IEEE 802.11ac support for 80MHz channels provides PHY layer rates up to 867Mbps
- QoS support of WFA WMM, WMMPS
- Support MU-MIMO RX
- Support STBC, LDPC, TX&RX beamforming
- Support Wake On WLAN

### COMMON FEATURE:

- MT7668BU is a single chip integrated IEEE 802.11 a/b/g/n/ac and Bluetooth 5.0 with a single USB interface
- PA, LNA, and T/R switch integration for Wi-Fi and Bluetooth
- Advanced FDD/TDD mode Wi-Fi/Bluetooth coexistence scheme
- Fully compliance with USB v2.0 specification
- RoHS compliance
- Low Halogen compliance

## PRODUCT SPECIFICATIONS

### MAIN CHIPSET

MediaTek MT7668BU

### FUNCTIONAL SPECIFICATIONS

BT Function	
Standard	Bluetooth V5.0LE
Bus Interface	USB2.0
Data Rate	1 Mbps, 2Mbps and Up to 3Mbps
Modulation Scheme	GFSK, $\pi/4$ -DQPSK and 8-DPSK
Frequency Range	2.402~2.480 GHz
Transmit Output Power	+4 ≤ Output Power ≤ +10dBm; Class I Device
Receiver Sensitivity	< 0.1% BER at -88dBm
Wi-Fi Function	
Standard	IEEE802.11a; IEEE802.11b; IEEE 802.11g; IEEE 802.11n. IEEE802.11ac
Bus Interface	USB2.0
Data Rate	<p><b>802.11a:</b> 54, 48, 36, 24, 18, 12, 9, 6 Mbps</p> <p><b>802.11b:</b> 11, 5.5, 2, 1 Mbps</p> <p><b>802.11g:</b> 54, 48, 36, 24, 18, 12, 9, 6 Mbps</p> <p><b>802.11n:</b> MCS 0 to 15 for HT20MHz MCS 0 to 15 for HT40MHz</p> <p><b>802.11ac:</b> MCS 0 to 8 for HT20MHz MCS 0 to 9 for HT40MHz MCS 0 to 9 for HT80MHz</p>
Media Access Control	CSMA/CA with ACK
Modulation Technique	<p><b>802.11a:</b> 64QAM, 16QAM, QPSK, BPSK</p> <p><b>802.11b:</b> CCK, DQPSK, DBPSK</p> <p><b>802.11g:</b> 64QAM, 16QAM, QPSK, BPSK</p> <p><b>802.11n:</b> 64QAM, 16QAM, QPSK, BPSK</p> <p><b>802.11ac:</b> 256QAM, 64QAM, 16QAM, QPSK, BPSK</p>

<b>Network Architecture</b>	Ad-hoc mode (Peer-to-Peer) Infrastructure mode
<b>Operation Channel</b>	<b>2.4GHz</b> 11: (Ch. 1-11) – United States 13: (Ch. 1-13) – Europe 14: (Ch. 1-14) – Japan
	<b>5GHz</b> 21: USA 19: EU 8: Japan
<b>Frequency Range</b>	<b>802.11bg</b> 2.400 ~ 2.4835 GHz <b>802.11a</b> 5.15 ~ 5.85 GHz
<b>EVM</b>	CCK < 35% OFDM < -25dB MCS0(HT20/40MHz) < -5dB MCS7(HT20/40MHz) < -28dB MCS0(VHT20/40/80MHz) < -5dB MCS7(VHT 20/40/80MHz) < -27dB MCS8(VHT 20/40/80MHz) < -30dB MCS9(VHT 20/40/80MHz) < -32dB
<b>Frequency Offset</b>	<b>2.4&amp;5GHz</b> -20ppm < Center Frequency < +20ppm

**Transmit Output Power - single chain @ant;**  
**Tolerance: ±1.5dBm@2.4GHz; ±2dBm@5GHz**

**2.4GHz**

<b>802.11b</b>	<b>1Mbps</b>	<b>2Mbps</b>	<b>5.5Mbps</b>	<b>11Mbps</b>
<b>Tgtpwr (dBm)</b>	16	16	16	16

<b>802.11g</b>	<b>6~24Mbps</b>	<b>36Mbps</b>	<b>48Mbps</b>	<b>54Mbps</b>
<b>Tgtpwr (dBm)</b>	15	15	15	15

<b>802.11n HT20</b>	<b>MCS0</b>	<b>MCS1</b>	<b>MCS2</b>	<b>MCS3</b>	<b>MCS4</b>
<b>Tgtpwr (dBm)</b>	15	15	15	15	15
	<b>MCS5</b>	<b>MCS6</b>	<b>MCS7</b>	<b>MCS8</b>	<b>MCS9</b>
	15	15	15		

<b>802.11n HT40</b>	<b>MCS0</b>	<b>MCS1</b>	<b>MCS2</b>	<b>MCS3</b>	<b>MCS4</b>
<b>Tgtpwr (dBm)</b>	15	15	15	15	15
	<b>MCS5</b>	<b>MCS6</b>	<b>MCS7</b>	<b>MCS8</b>	<b>MCS9</b>
	15	15	15		

**5GHz**

<b>802.11a</b>	<b>6~24Mbps</b>	<b>36Mbps</b>	<b>48Mbps</b>	<b>54Mbps</b>
<b>Tgtpwr (dBm)</b>	14	14	14	14

<b>802.11n HT20</b>	<b>MCS0</b>	<b>MCS1</b>	<b>MCS2</b>	<b>MCS3</b>	<b>MCS4</b>
<b>Tgtpwr (dBm)</b>	14	14	14	14	14
	<b>MCS5</b>	<b>MCS6</b>	<b>MCS7</b>	<b>MCS8</b>	<b>MCS9</b>
	14	14	14		

<b>802.11n HT40</b>	<b>MCS0</b>	<b>MCS1</b>	<b>MCS2</b>	<b>MCS3</b>	<b>MCS4</b>
<b>Tgtpwr (dBm)</b>	13	13	13	13	13
	<b>MCS5</b>	<b>MCS6</b>	<b>MCS7</b>	<b>MCS8</b>	<b>MCS9</b>
	13	13	13		

<b>802.11ac VHT20</b>	<b>MCS0</b>	<b>MCS1</b>	<b>MCS2</b>	<b>MCS3</b>	<b>MCS4</b>
<b>Tgtpwr (dBm)</b>	14	14	14	14	14
	<b>MCS5</b>	<b>MCS6</b>	<b>MCS7</b>	<b>MCS8</b>	<b>MCS9</b>
	14	14	14	14	

<b>802.11ac VHT40</b>	<b>MCS0</b>	<b>MCS1</b>	<b>MCS2</b>	<b>MCS3</b>	<b>MCS4</b>
<b>Tgtpwr (dBm)</b>	13	13	13	13	13
	<b>MCS5</b>	<b>MCS6</b>	<b>MCS7</b>	<b>MCS8</b>	<b>MCS9</b>
	13	13	13	13	13

<b>802.11ac VHT80</b>	<b>MCS0</b>	<b>MCS1</b>	<b>MCS2</b>	<b>MCS3</b>	<b>MCS4</b>
<b>Tgtpwr (dBm)</b>	12	12	12	12	12
	<b>MCS5</b>	<b>MCS6</b>	<b>MCS7</b>	<b>MCS8</b>	<b>MCS9</b>
	12	12	12	12	12

**Receiver Sensitivity**

<b>Frequency Band</b>	<b>Rate</b>	<b>Condition</b>	<b>Typical (ISS) (dBm)</b>
<b>2.4G</b>	11b-1M	PER < 8%	-94
	11b-11M	PER < 8%	-86
	11g-6M	PER < 10%	-90
	11g-54M	PER < 10%	-73
	11n-HT20MCS0	PER < 10%	-87
	11n-HT20MCS7	PER < 10%	-70
	11n-HT40MCS0	PER < 10%	-84
<b>5G</b>	11n-HT40MCS7	PER < 10%	-67
	11a-6M	PER < 10%	-88
	11a-54M	PER < 10%	-71
	11ac-VHT20MCS0	PER < 10%	-85
	11ac-VHT20MCS7	PER < 10%	-68
	11ac-VHT20MCS8	PER < 10%	-65
	11ac-VHT40MCS0	PER < 10%	-82
	11ac-VHT40MCS7	PER < 10%	-65
	11ac-VHT40MCS9	PER < 10%	-61
11ac-VHT80MCS0	PER < 10%	-80	
11ac-VHT80MCS7	PER < 10%	-63	

	11ac-VHT80MCS9	PER < 10%	-57		
<b>Security</b>	WPS, WPA, WPA2, WEP 64bit & 128bit, IEEE 802.1X, IEEE 802.11i				
<b>Common Function</b>					
<b>Operating Voltage</b>	3.3 V ±10% I/O supply voltage				
<b>Power Consumption</b>	<i>Mode</i>	<i>Average</i>		<i>Peak</i>	
		<i>2.4G</i>	<i>5G</i>	<i>2.4G</i>	<i>5G</i>
	<i>TX</i>	<i>TBDmA</i>	<i>TBDmA</i>	<i>TBDmA</i>	<i>TBDmA</i>
	<i>RX</i>	<i>TBDmA</i>	<i>TBDmA</i>		
	<i>Unassociated Idle</i>	<i>TBDmA</i>			
<b>Antenna Type</b>	Triple U.FL connectors for WiFi&BT				


### RECOMMENDED OPERATION CONDITIONS

Symbol	Rating	Min	Typ	Max	Units
VDD33	3.3V Supply Voltage	2.97	3.3	3.63	V
VDD18	1.8V Supply Voltage	1.7	1.8	1.9	V
T <sub>AMBIENT</sub>	Ambient Temperature	-10	-	70	°C

### DC CHARACTERISTICS

Symbol	Parameter	Min	Typ	Max	Units
V <sub>IL</sub>	Input Low Voltage	-0.28	-	0.6	V
V <sub>IH</sub>	Input High Voltage	2.0	-	3.63	V
V <sub>OL</sub>	Output Low Voltage	-0.28	-	0.4	V
V <sub>OH</sub>	Output High Voltage	2.9	-	3.63	V

### POWER ON SEQUENCE TIMING

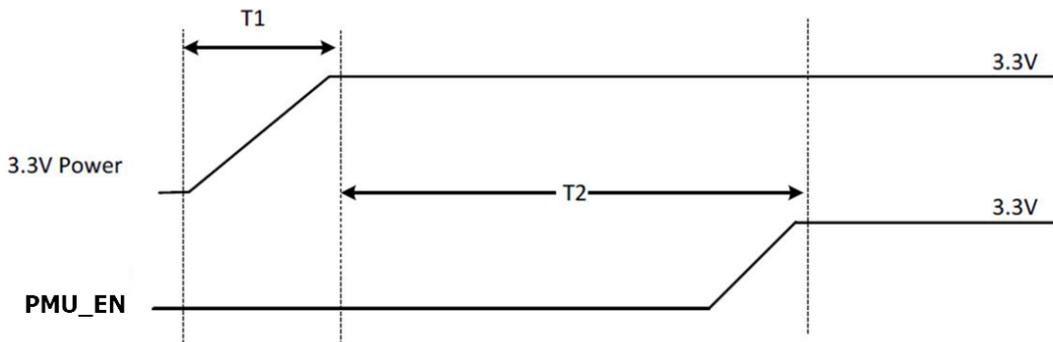

T1: max. 5ms


T2 > 1ms (LDO\_RST\_N must be asserted after 3.3V ready)

**PIN ASSIGNMENT**

Pin.	Pin Define	Description	Status
1	+3.3V	3.3V source	YES
2	+3.3V	3.3V source	YES
3	USB_D-	USB Data-	YES
4	USB_D+	USB Data+	YES
5	GND	Ground	YES
6	RESET#	System reset MT7668BU, low active	YES
7	WoWLAN#	Wake up system via wifi, low active	YES
8	GND	Ground	YES
9	WoBT	Wake up system via BT, low active	YES
10	GND	Ground	YES
11	GND	Ground	YES
12	GND	Ground	YES
13	GND	Ground	YES
14	GND	Ground	YES


**FOOTPRINT**

*Top View*

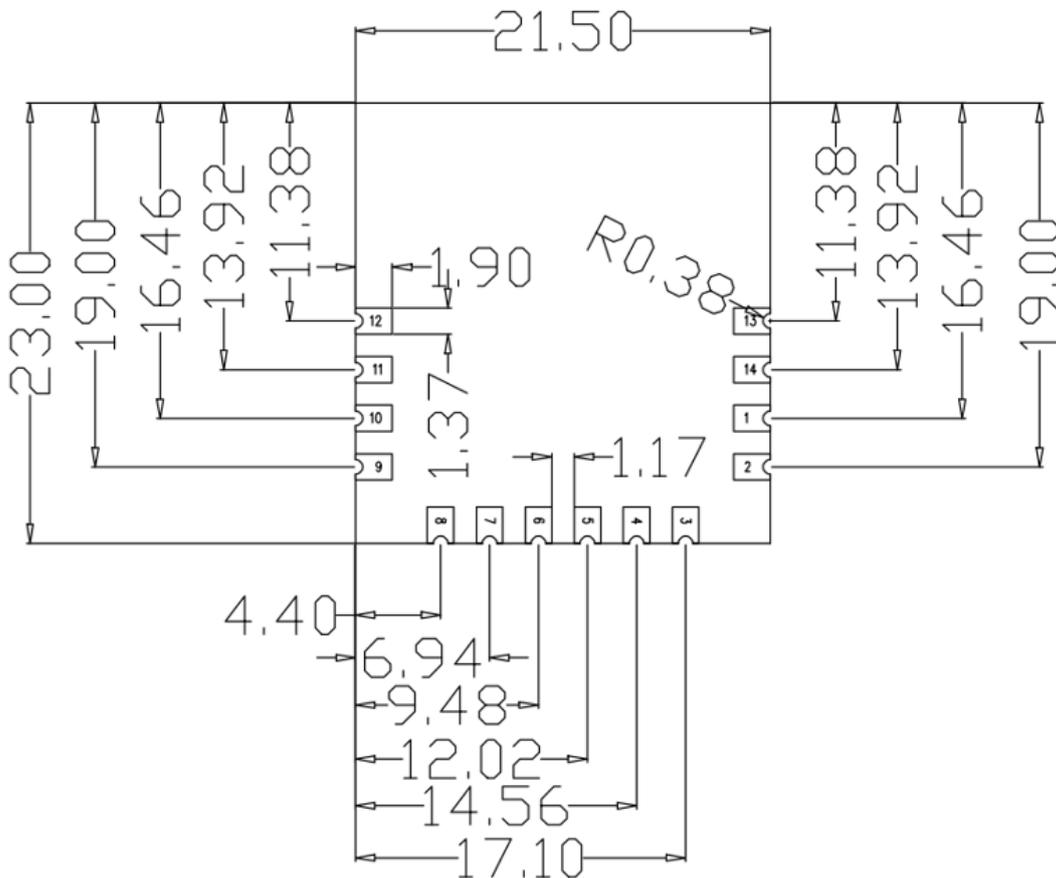

**Unit:mm**

**MECHANICAL**

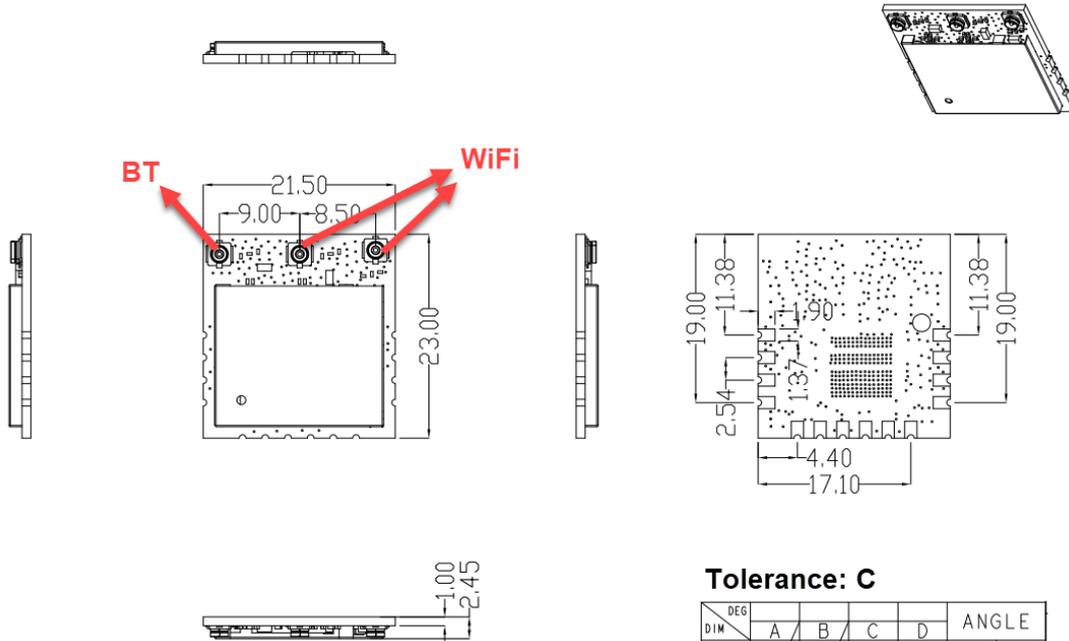

**Tolerance: C**

DIM	DEG				ANGLE
	A	B	C	D	
0-5	±0.02	±0.05	±0.10		0°-30° ±0.1°
5-10	±0.05	±0.10	±0.15		31°-60° ±0.3°
10-50	±0.10	±0.15	±0.20		61°-90° ±0.5°
50-100	±0.15	±0.20	±0.25		
100-	±0.15%	±0.20%	±0.25%		

**Unit: mm**

**EEPROM INFORMATION**

**Wi-Fi**

<b>Reg Domain</b>	World Wide <b>2.4G/5G</b> Read from registry; Control by driver
<b>Vendor ID</b>	0x0E8D
<b>Device ID</b>	0x7668

**ENVIRONMENTAL**

**OPERATING**

Ambient Operating Temperature: -10 to 70 °C (14 to 158 °F)

Ambient Relative Humidity: 5-90% (non-condensing)

**STORAGE**

Ambient Temperature: -40 to 80 °C (-40 to 176 °F)

Ambient Relative Humidity: 5-95% (non-condensing)

**WARNINGS**

## FCC Statement:

## Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

This device and its antenna(s) must not be co-located with any other transmitters except in accordance with FCC multi-transmitter product procedures.

Referring to the multi-transmitter policy, multiple-transmitter(s) and module(s) can be operated simultaneously without C2P.

This device is restricted for indoor use.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter

**IMPORTANT NOTE:****FCC Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

**IMPORTANT NOTE:**

This module is intended for OEM integrator. The OEM integrator is responsible for the compliance to all the rules that apply to the product into which this certified RF module is integrated.

Additional testing and certification may be necessary when multiple modules are used.

20 cm minimum distance has to be able to be maintained between the antenna and the users for the host this module is integrated into. Under such configuration, the FCC radiation exposure limits set forth for an population/uncontrolled environment can be satisfied.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

**USERS MANUAL OF THE END PRODUCT:**

In the users manual of the end product, the end user has to be informed to keep at least 20 cm separation with the antenna while this end product is installed and operated. The end user has to be informed that the FCC radio-frequency exposure guidelines for an uncontrolled environment can be satisfied. The end user has to also be informed that any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment. If the size of the end product is smaller than 8x10cm, then additional FCC part 15.19 statement is required to be available in the users manual: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

This device is restricted to **indoor** use.

**LABEL OF THE END PRODUCT:**

The final end product must be labeled in a visible area with the following " Contains TX FCC ID: PPQ-WCBN3509R ". If the size of the end product is larger than 8x10cm, then the following FCC part 15.19 statement has to also be available on the label: This device

complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

IC Statement:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;

L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

For product available in the USA/Canada market, only channel 1~11 can be operated.

Selection of other channels is not possible.

Pour les produits disponibles aux États-Unis / Canada du marché, seul le canal 1 à 11 peuvent être exploités. Sélection d'autres canaux n'est pas possible.

This device and its antenna(s) must not be co-located with any other transmitters except in accordance with IC multi-transmitter product procedures.

Referring to the multi-transmitter policy, multiple-transmitter(s) and module(s) can be operated simultaneously without reassessment permissive change.

Cet appareil et son antenne (s) ne doit pas être co-localisés ou fonctionnement en association avec une autre antenne ou transmetteur.

The device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

The maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate.

le gain maximal d'antenne permis (pour les dispositifs utilisant la bande 5725-5850 MHz) doit se conformer à la limite de p.i.r.e. spécifiée pour l'exploitation point à point et non point à point, selon le cas.

Dynamic Frequency Selection (DFS) for devices operating in the bands 5250- 5350 MHz, 5470-5600 MHz and 5650-5725 MHz.

Sélection dynamique de fréquences (DFS) pour les dispositifs fonctionnant dans les bandes 5250-5350 MHz, 5470-5600 MHz et 5650-5725 MHz.

The maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit.

le gain maximal d'antenne permis pour les dispositifs utilisant les bandes 5250-5350 MHz et 5470-5725 MHz doit se conformer à la limite de p.i.r.e.

Users should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

De plus, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250-5350 MHz et 5650-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

For indoor use only.

Pour une utilisation en intérieur uniquement.

#### IMPORTANT NOTE:

##### IC Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

This radio transmitter (IC: 4491A-WCBN3509R) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list,

having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio (IC: 4491A-WCBN3509R) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

The transmitter module may not be co-located with any other transmitter or antenna.

Le module émetteur peut ne pas être coïmplanté avec un autre émetteur ou antenne.

This module is intended for OEM integrator. The OEM integrator is still responsible for the IC compliance requirement of the end product, which integrates this module.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

#### USERS MANUAL OF THE END PRODUCT:

In the users manual of the end product, the end user has to be informed to keep at least 20 cm separation with the antenna while this end product is installed and operated. The end user has to be informed that the IC radio-frequency exposure guidelines for an uncontrolled environment can be satisfied. The end user has to also be informed that any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

The transmitter module may not be co-located with any other transmitter or antenna.

Le module émetteur peut ne pas être coïmplanté avec un autre émetteur ou antenne.

#### LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following " Contains TX IC : 4491A-WCBN3509R".

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Remark
1	HONGBO	290-10569	PIFA	I-Pex	2.4G+5G	Group 1
2	HONGBO	290-10569	PIFA	I-Pex	2.4G+5G	
3	HONGBO	290-10569	PIFA	I-Pex	BT	
4	PSA	RFMTA401030IML B702	PIFA	I-Pex	2.4G+5G	Group 2
5	PSA	RFMTA401030IML B702	PIFA	I-Pex	2.4G+5G	
6	PSA	RFMTA401030IML B702	PIFA	I-Pex	BT	
7	HONGBO	290-10843	PIFA	I-Pex	2.4G+5G	Group 3
8	HONGBO	290-10843	PIFA	I-Pex	2.4G+5G	
9	HONGBO	290-10843	PIFA	I-Pex	BT	
10	PSA	RFMTA401050IML B706	PIFA	I-Pex	2.4G+5G	Group 4
11	PSA	RFMTA401050IML B706	PIFA	I-Pex	2.4G+5G	
12	PSA	RFMTA401050IML B706	PIFA	I-Pex	BT	
13	HONGBO	290-10844	PIFA	I-Pex	2.4G+5G	Group 5
14	HONGBO	290-10844	PIFA	I-Pex	2.4G+5G	
15	HONGBO	290-10844	PIFA	I-Pex	BT	
16	PSA	RFMTA401080IML B704	PIFA	I-Pex	2.4G+5G	Group 6
17	PSA	RFMTA401080IML B704	PIFA	I-Pex	2.4G+5G	
18	PSA	RFMTA401080IML B704	PIFA	I-Pex	BT	
19	PSA	RFMTA340730IML B305	PIFA	I-Pex	2.4G+5G	Group 7
20	PSA	RFMTA340715IML B302	PIFA	I-Pex	2.4G+5G	
21	PSA	RFMTA340730IML B305	PIFA	I-Pex	BT	

Ant.	Port	Gain (dBi)			Remark
		2.4G	5G	BT	
1	1	3.74	3.8	-	Group 1
2	2	3.74	3.8	-	
3	3	-	-	3.74	
4	1	3.74	3.8	-	Group 2
5	2	3.74	3.8	-	
6	3	-	-	3.74	
7	1	3.05	1.59	-	Group 3
8	2	3.05	1.59	-	
9	3	-	-	3.05	
10	1	3.05	1.59	-	Group 4
11	2	3.05	1.59	-	
12	3	-	-	3.05	
13	1	2.38	1.49	-	Group 5
14	2	2.38	1.49	-	
15	3	-	-	2.38	
16	1	1.72	1.25	-	Group 6
17	2	1.72	1.25	-	
18	3	-	-	1.72	
19	1	-0.5	3.28	-	Group 7
20	2	-1.68	3.08	-	
21	3	-	-	-0.5	

Japan Statement:

5GHz product for indoor use only.

CE Statement:

This equipment complies with EU radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.