

Ordering Information

Catalog No.	Finishes	Mountings	Lamps
26038 WH	Matte White	ProSpec™ Track System	PAR38 250W Max.
26038 BK	Matte Black		

Features

- Track attachment fitting:** die-cast aluminum with separate mechanical and electrical functions. Fitting cannot be engaged or disengaged while fixture is powered. Polarity is not a concern with ProSpec track because of its symmetrical positioning of circuits within the track, adapters are reversed to access one or the other circuits.
- Stem:** 5/8" O.D. .049" wall, stainless steel.
- Locking feature:** die-cast aluminum mechanism permits the locking of the horizontal and vertical positions simultaneously by clamping jaws. When the stainless steel braking lever is released, the horizontal and vertical functions remain fully tensioned to hold aiming positions. Adjustment range is: Horizontal 0-340°; Vertical 0° (NADIR) - 90°.
- Lampholder:** porcelain, medium base, nickel plated screw shell, #18 ga. braided SF-1 leads.
- Housing:** 20 ga. (.036) steel, hemmed front edge for stiffness, prevents chipping and enhances appearance.
- Lamp and accessory support:** .032 steel, flared for easy entry of accessory cartridge, matte black finish.
- Lens retaining ring:** .125" spring steel.
- Accessory cartridge:** formed aluminum, installs and removes with a twist and lock action. Holds three accessories max. and cross blade baffle; black matte finish.
- Cross blade baffle:** .070 extruded aluminum, black matte finish. 1" deep, removable.
- Lever:** energizes fixture electrically by 90° rotation.
- Clamping tabs:** expands or releases gripper springs from track ledge; gripper springs hold attachment fitting securely within track.

Finish

All painted finishes are powder coated baked enamel.

Options & Accessories

Accessories: 4 3/4" dia. series. Filters, lenses, screens and louvers. 150W max. when using accessories.

Electrical

Electrical components: Polycarbonate moldings.
Contacts: Heavy gauge 1/2 hard brass developed for Lightolier's "U" shaped track conductors.

Labels

UL, I.B.E.W.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®




Lighting Data

Aiming Angle:

- L** Beam length
- W** Beam width
- C** Distance to center of beam
- D** Distance
- A** Aiming angle
- FC** Footcandles

L and **W** are the outer points where the candlepower drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

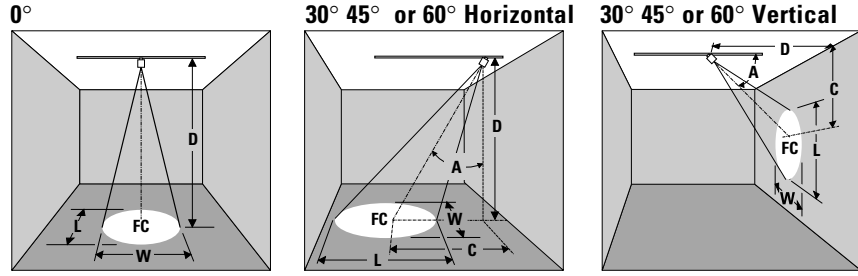

LAMP	Beam Spread 50% Max CP	Beam Center C.P. Candelas	Rated Life-Hrs	0° AIMING ANGLE					A=30° AIMING ANGLE					A=45° AIMING ANGLE					A=60° AIMING ANGLE																																																												
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W																																																									
90W PAR38 NSP (T-H)	9°	19500	2500	10' 195	1.6'	1.6'	8' 4.6'	198	1.7'	1.5'	6' 6.0'	192	1.9'	1.3'	4' 6.9'	152	2.6'	1.3'	15' 87	2.4'	2.4'	12' 6.9'	88	2.5'	2.2'	9' 9.0'	85	2.9'	2.0'	6' 10.4'	60	3.8'	1.9'	20' 49	3.1'	3.1'	16' 9.2'	49	3.4'	2.9'	12' 12.0'	48	3.8'	2.7'	8' 13.9'	38	5.1'	2.5'	25' 31	3.9'	3.9'	20' 11.5'	32	4.2'	3.6'	15' 15.0'	31	4.8'	3.3'	10' 17.3'	24	6.4'	3.1'																
90W PAR38 SP (T-H)	12°	14500	2500	8' 227	1.7'	1.7'	7' 4.0'	192	2.0'	1.7'	5' 5.0'	205	2.1'	1.5'	3' 5.2'	201	2.6'	1.3'	12' 101	2.5'	2.5'	10' 5.8'	94	2.8'	2.4'	7' 7.0'	105	3.0'	2.1'	4' 6.9'	113	3.5'	1.7'	16' 57	3.4'	3.4'	13' 7.5'	56	3.7'	3.2'	9' 9.0'	63	3.8'	2.7'	11' 11.0'	42	4.7'	3.3'	6' 10.4'	50	5.2'	2.5'	20' 36	4.2'	4.2'	16' 9.2'	37	4.5'	3.9'	11' 11.0'	42	4.7'	3.3'	6' 10.4'	50	5.2'	2.5'												
90W PAR38 FL (T-H)	28°	4500	2500	6' 125	3.0'	3.0'	5' 2.8'	117	3.4'	2.9'	3' 3.0'	177	3.2'	2.1'	2' 3.5'	141	4.9'	2.0'	10' 45	5.0'	5.0'	7' 4.0'	60	4.8'	4.0'	5' 5.0'	64	5.3'	3.5'	3' 5.2	63	7.4'	3.0'	7' 7.0'	32	7.4'	4.8'	4' 6.9'	35	9.8'	4.0'	12' 45	5.0'	5.0'	9' 5.2'	36	6.1'	5.2'	7' 7.0'	32	7.4'	4.8'	4' 6.9'	35	9.8'	4.0'	12' 45	5.0'	5.0'	9' 5.2'	36	6.1'	5.2'	7' 7.0'	32	7.4'	4.8'	4' 6.9'	35	9.8'	4.0'								
90W PAR38 WFL (T-H)	60°	1300	2500	3' 144	3.5'	3.5'	3' 1.7'	94	5.2'	4.0'	2' 2.0'	115	6.9'	3.3'	1' 1.7'	163	NA	2.3'	5' 52	5.8'	5.8'	5' 2.9'	34	8.7'	6.7'	3' 3.0'	51	10.4'	4.9'	2' 3.5	41	NA	4.6'	7' 27	8.1'	8.1'	7' 4.0'	17	12.1'	9.3'	4' 4.0'	29	13.9'	6.5'	3' 5.2'	18	NA	6.9'	9' 9.2'	20	9.6'	6.3'	4' 6.9'	10	NA	9.2'	7' 27	8.1'	8.1'	7' 4.0'	17	12.1'	9.3'	4' 4.0'	29	13.9'	6.5'	3' 5.2'	18	NA	6.9'	9' 9.2'	20	9.6'	6.3'	4' 6.9'	10	NA	9.2'
100W PAR38 SP (T-H IR)	10°	29000	3000	10' 290	1.7'	1.7'	8' 4.6'	294	1.9'	1.6'	6' 6.0'	285	2.1'	1.5'	4' 6.9'	227	2.9'	1.4'	15' 129	2.6'	2.6'	12' 6.9'	131	2.8'	2.4'	9' 9.0'	127	3.2'	2.2'	6' 10.4'	101	4.3'	2.1'	20' 73	3.5'	3.5'	16' 9.2'	74	3.7'	3.2'	12' 12.0'	71	4.2'	3.0'	8' 13.9'	57	5.7'	2.8'	15' 15.0'	46	5.3'	3.7'	10' 17.3'	36	7.2'	3.5'	25' 46	4.4'	4.4'	20' 11.5'	47	4.7'	4.0'	15' 15.0'	46	5.3'	3.7'	10' 17.3'	36	7.2'	3.5'								
100W PAR38 NFL (T-H IR)	27°	7500	3000	7' 153	3.4'	3.4'	6' 3.5'	135	3.9'	3.3'	4' 4.0'	166	4.1'	2.7'	2' 3.5'	234	4.6'	1.9'	10' 75	4.8'	4.8'	9' 5.2'	60	5.9'	5.0'	6' 6.0'	74	6.1'	4.1'	3' 5.2'	104	7.0'	2.9'	7' 7.0'	41	8.2'	5.4'	4' 6.9'	59	9.3'	3.6'	13' 44	6.2'	6.2'	15' 8.7'	22	9.8'	8.3'	10' 10.0'	27	10.2'	6.8'	5' 8.7'	38	11.6'	4.8'	16' 29	7.7'	7.7'	15' 8.7'	22	9.8'	8.3'	10' 10.0'	27	10.2'	6.8'	5' 8.7'	38	11.6'	4.8'								
100W PAR38 FL (T-H IR)	40°	3400	3000	6' 94	4.4'	4.4'	5' 2.9'	88	5.1'	4.2'	3' 3.0'	134	5.0'	3.1'	2' 3.5'	106	9.7'	2.9'	8' 53	5.8'	5.8'	7' 4.0'	45	7.1'	5.9'	5' 5.0'	48	8.4'	3.1'	3' 5.2	47	14.5'	4.4'	7' 7.0'	25	11.7'	7.2'	4' 6.9'	27	19.3'	5.8'	10' 34	7.3'	7.3'	11' 6.4'	18	11.2'	9.2'	9' 9.0'	15	15.1'	9.3'	5' 8.7'	17	24.2'	7.3'	12' 24	8.7'	8.7'	11' 6.4'	18	11.2'	9.2'	9' 9.0'	15	15.1'	9.3'	5' 8.7'	17	24.2'	7.3'								
120W PAR38 NSP (T-H)	10°	25000	3000	10' 250	1.7'	1.7'	8' 4.6'	254	1.9'	1.6'	6' 6.0'	246	2.1'	1.5'	4' 6.9'	195	2.9'	1.4'	15' 111	2.6'	2.6'	12' 6.9'	113	2.8'	2.4'	9' 9.0'	109	3.2'	2.2'	6' 10.4'	87	4.3'	2.1'	20' 63	3.5'	3.5'	16' 9.2'	63	3.7'	3.2'	12' 12.0'	61	4.2'	3.0'	8' 13.9'	49	5.7'	2.8'	15' 15.0'	39	5.3'	3.7'	10' 17.3'	31	7.2'	3.5'	25' 40	4.4'	4.4'	20' 11.5'	41	4.7'	4.0'	15' 15.0'	39	5.3'	3.7'	10' 17.3'	31	7.2'	3.5'								
120W PAR38 FL (T-H)	30°	5000	3000	6' 139	3.2'	3.2'	5' 2.9'	130	3.7'	3.1'	3' 3.0'	196	3.5'	2.3'	2' 3.5'	156	5.5'	2.1'	8' 87	4.3'	4.3'	7' 4.0'	66	5.1'	4.3'	6' 6.0'	71	5.8'	3.8'	3' 5.2'	69	6.2'	3.2'	7' 7.0'	36	8.1'	5.3'	4' 6.9'	39	10.9'	4.3'	12' 35	6.4'	6.4'	11' 6.4'	27	8.1'	6.8'	9' 9.0'	22	10.4'	6.6'	5' 8.7'	25	13.7'	5.4'	16' 29	7.7'	7.7'	15' 8.7'	22	9.8'	8.3'	10' 10.0'	27	10.2'	6.8'	5' 8.7'	38	11.6'	4.8'								
120W PAR38 WFL (T-H)	50°	2000	3000	4' 125	3.7'	3.7'	3' 1.7'	144	4.0'	3.2'	2' 2.0'	161	4.1'	2.7'	1' 1.7'	250	10.7'	1.9'	6' 6.0'	5.6'	5.6'	5' 2.9'	52	6.7'	5.4'	3' 3.0'	79	7.2'	4.0'	2' 3.5	63	21.5'	3.7'	7' 7.0'	28	32.2'	5.6'	4' 6.9'	28	42.9'	7.5'	10' 34	7.3'	7.3'	11' 6.4'	18	11.2'	9.2'	9' 9.0'	15	15.1'	9.3'	5' 8.7'	17	24.2'	7.3'	12' 24	8.7'	8.7'	11' 6.4'	18	11.2'	9.2'	9' 9.0'	15	15.1'	9.3'	5' 8.7'	17	24.2'	7.3'								
250W PAR38 SP (T-H)	11°	40000	4200	15' 178	2.9'	2.9'	10' 5.6'	260	2.6'	2.2'	8' 8.0'	221	3.1'	2.2'	5' 8.7'	200	4.0'	1.9'	20' 100	3.9'	3.9'	15' 8.7'	115	3.9'	3.3'	12' 12.0'	98	4.7'	3.3'	8' 13.9'	78	6.3'	3.1'	11' 19.1'	41	8.7'	4.2'	14' 24.2'	26	11.1'	5.4'	25' 64	4.8'	4.8'	25' 14.4'	42	6.4'	5.6'	20' 20.0'	35	7.8'	5.4'	14' 24.2'	26	11.1'	5.4'	25' 64	4.8'	4.8'	25' 14.4'	42	6.4'	5.6'	20' 20.0'	35	7.8'	5.4'	14' 24.2'	26	11.1'	5.4'								
250W PAR38 FL (T-H)	32°	8000	4200	7' 163	4.0'	4.0'	6' 3.5'	144	4.7'	4.0'	4' 4.0'	177	5.0'	3.2'	2' 3.5'	250	6.1'	2.3'	10' 80	5.7'	5.7'	9' 5.2'	64	7.1'	6.0'	6' 6.0'	79	7.5'	4.9'	3' 5.2'	111	9.1'	3.4'	4' 6.9'	63	12.2'	4.6'	13' 47	7.5'	7.5'	12' 6.9'	35	9.4'	7.9'	10' 10.0'	28	12.5'	8.1'	8' 8.0'	44	10.0'	6.5'	5' 8.7'	40	15.2'	5.7'	16' 31	9.2'	9.2'	15' 8.7'	23	11.8'	9.9'	10' 10.0'	28	12.5'	8.1'	5' 8.7'	40	15.2'	5.7'								

Job Information **Type:**

Lightolier a Genlyte Thomas Company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER