


# User's Manual

## LT-800 Stationary Transmitter

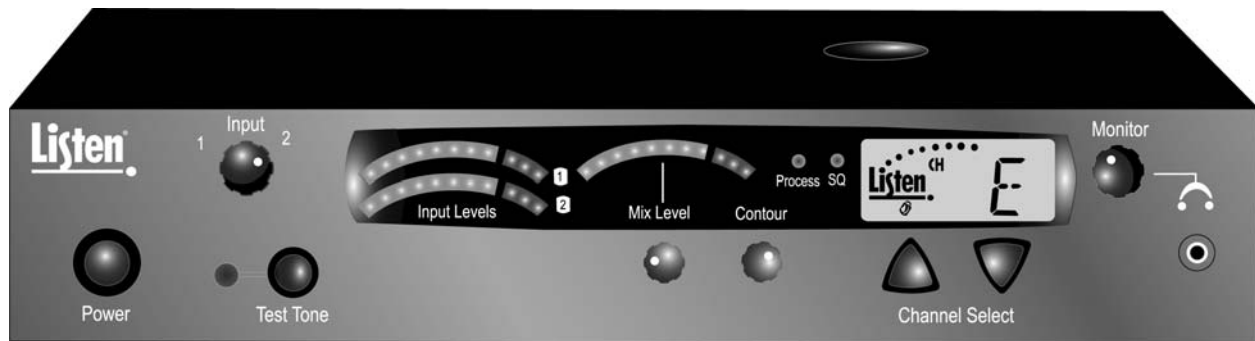

Don't miss a single sound. Listen.

**Listen<sup>®</sup>**  
www.ListenTech.com

Listen Technologies Corporation  
8535 South 700 West, Suite A  
Sandy, Utah 84070-2515 U.S.A.  
Telephone: 1.801.233.8992  
Toll Free (North America): 1.800.330.0891  
Fax: 1.801.233.8995  
E-mail: info@ListenTech.com

Dear Valued Customer,

Thank you for choosing Listen! All of us at Listen are dedicated to providing you the highest quality products and prompt, efficient customer care. Our products are manufactured in an ISO-9000 factory that has been independently certified to the highest quality standards. We stand ready to answer any questions you might have during installation or in the operation of our products. Should there be any problems with your Listen products, we are ready to help you in any way we can. We appreciate any comments you may have on how we might improve our products or our service. Here's how to reach us:

Telephone: 1.801.233.8992

Fax: 1.801.233.8995

Toll Free (North America): 1.800.330.0891

E-Mail: [support@ListenTech.com](mailto:support@ListenTech.com)

Web: [www.ListenTech.com](http://www.ListenTech.com)

Thank you... and enjoy your listening experience!

Best regards,

The Listen Team



Russell Gentner, President

## LT-800 Package Contents

- LT-800 Stationary Transmitter (72 MHz or 216 MHz)
- LA-201 120 VAC Power Supply
- LA-121 BNC Adapter (72 MHz model only)
- User Manual
- Quick Reference Sticker



## Listen Part Number

72 MHz: LT-800-072

216 MHz: LT-800-216

## Optional Accessories

See pages 19-20

## Table of Contents

Specifications .....	2
Block Diagram .....	3
Quick Reference .....	4
Setup Instructions .....	5
Phonak Compatibility .....	5
Operating Instructions .....	7
Audio Control .....	7
Compatibility with other Manufacturers .....	8
Listen SQ™ .....	9
Process Mode .....	9
Basic and Expanded Mode .....	9
RF Reception Maximization Strategies .....	10
Coaxial Cable .....	10
Channel Selection .....	11
72 MHz Frequency Compatibility Table .....	12
216 MHz Frequency Compatibility Table .....	13
Phonak Frequency Compatibility Table .....	14
Troubleshooting .....	15
Compliance Notice .....	17
FCC Statement .....	17
Warranty .....	18
Contact .....	18
Optional Accessories .....	19

## Specifications


### Architectural Specifications

The stationary FM transmitter shall be capable of broadcasting on 57 channels. The transmitter shall have a SNR of 80dB or greater. The output power shall be adjustable to quarter, half or full. Channel tuning shall be capable of being locked. The device shall broadcast on both wide and narrow band channels. The device shall have an audio frequency response of 63 Hz to 15k Hz,  $\pm 3$ dB at 72 MHz, or of 63 Hz to 10k Hz,  $\pm 3$ dB at 216 MHz. It shall have two mixing audio inputs. The device shall have the following audio controls: input level, mix level and an adjustable low pass filter. The device shall have an audio processor that is capable of automatic gain control and limiting. The Listen LT-800 is specified.

### Specifications


Specification		LT-800-072	LT-800-216
RF	RF Frequency Range	72.025 - 75.975 MHz	216.025 - 216.975 MHz
	Number of Channels	57 (17 wide, 40 narrow)	57 (19 wide, 38 narrow)
	Frequency Accuracy	+/- .005% stability 0 to 50C	
	Transmitter Stability	50 PPM	
	Output Power	8,000uV at 3m	100mW (Max allowed by FCC)
	Antenna	Several available. See www.ListenTech.com for details	
	Antenna Connector	BNC	BNC
Compliance		FCC Part 15, Industry Canada	
** All system specifications are wireless end-to-end			
Audio	System Frequency Response	63Hz - 15kHz (±3dB)	63Hz - 10kHz (± 3dB)
	System Signal to Noise Ratio (A-weighted)	SQ enabled: 80dB; SQ disabled 60dB	SQ enabled: 80dB; SQ disabled 50dB
	System Distortion	<2% total harmonic distortion (THD) at 80% deviation	<2% total harmonic distortion (THD) at 80% deviation
	Audio Input 1	Rear panel. Female-XLR and 1/4 in combo connector, balanced, 0/-55dBu (line/mic) nominal input level adjustable, -30/+21dBu (mic/line) maximum input level, impedance 20k/1k ohms (line/mic), phantom power +12VDC	
	Audio Input 2	Rear panel. (2) Phono connectors, unbalanced, -10/+10dBu nominal input level adjustable, +30dBu maximum, impedance 100k ohms	
	Combined Audio Output (Mix)	Rear panel. (2) Phono connectors, unbalanced, 0dBu nominal output level, +19dBu maximum, impedance 10 ohms.	
	Headphone Output	Front panel. (1) 3.5mm connector, unbalanced, adjustable output level, +14dBu maximum, impedance 10 ohms. 350mW, 32 ohms, 3.5mm stereo.	
Controls	Front Panel	Power, Test Tone on/off, Channel up/down, Input Level, Mix Level, Contour, Headset Level	
	Rear Panel	Input 1 Level (Line, Mic, Mic-Phantom Power), Input 2 Level (-10/+10 dBu), RF Power (low, mid, high)	
	Internal Adjustments	Compression ratio for audio processor	
	Programming	SQ on/off, Processing on/off	
Indicators	Input 1 and Input 2, Mix VU Meters	8 Green, 2 Red	
	SQ and Processing	Indicated by a green LED when on	
	RF Power	Indicated on the LCD Display	
	Power	Red LED illuminates when the unit is powered up	
Power	LCD Display	Channel designation, lock status, RF Power Level	
	Test Tone	Red LED illuminates when test tone enabled	
	Power Supply Type	In-line power supply, Listen part number LA-201	
	Power Supply Input	120VAC, 60 Hz, 19 watts	
Physical	Power Supply Output	15VAC, 1000mA	
	Power Supply Connector	.02 in (5.0mm) OD x .01 in (2.5mm) ID, barrel type	
	Compliance	UL Listed	
	Dimensions	8.0 in (20.3cm) W x 8.0 in (20.3cm) D x 1.75 in (4.45cm) H	
Physical	Unit Weight	3.0 lbs (1.4kg)	
	Unit Weight with LA-201 Power Supply	4.4 lbs (2.0kg)	
	Shipping Weight	5.0 lbs (2. kg)	
	Rack Mounting	1 rack unit, optional rack mount not included. Order Listen part number LA-326.	
Environmental	Temperature - Operation	-10 C (14 F) to +40° (104 F)	
	Temperature - Storage	-20 C (-4 F) to +50° (122 F)	
	Humidity	0 to 95% relative humidity, non-condensing	

## LT-800 Block Diagram

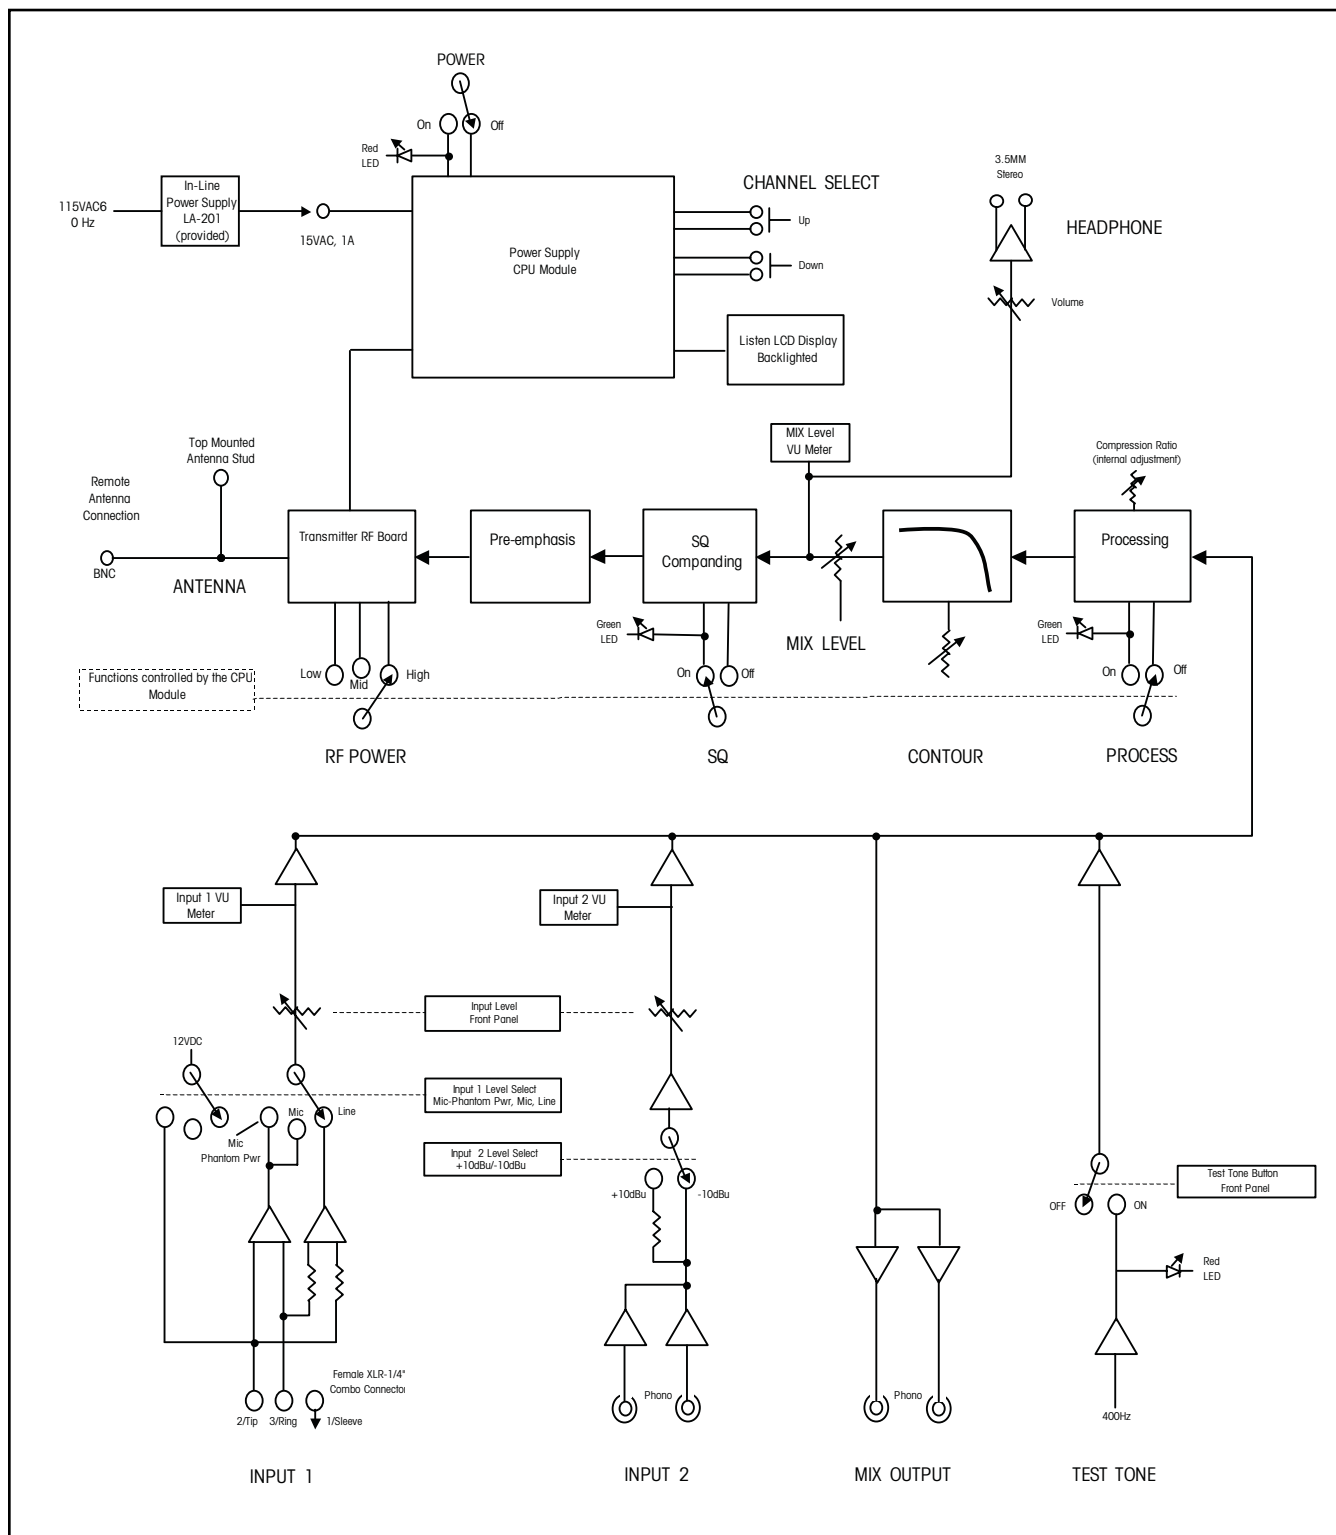


## Quick Reference

### LT-800 Front Panel: Controls & Displays

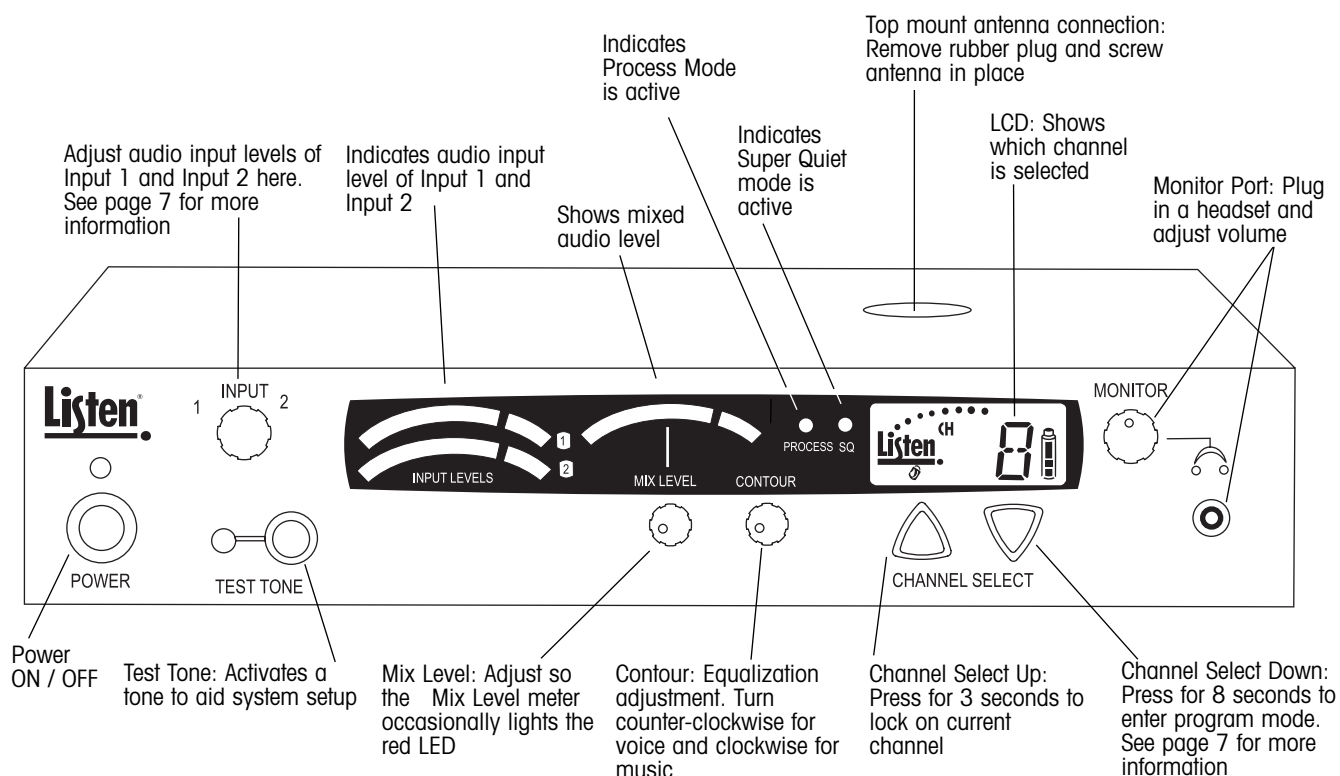

### LT-800 Back Panel: Connections & Settings

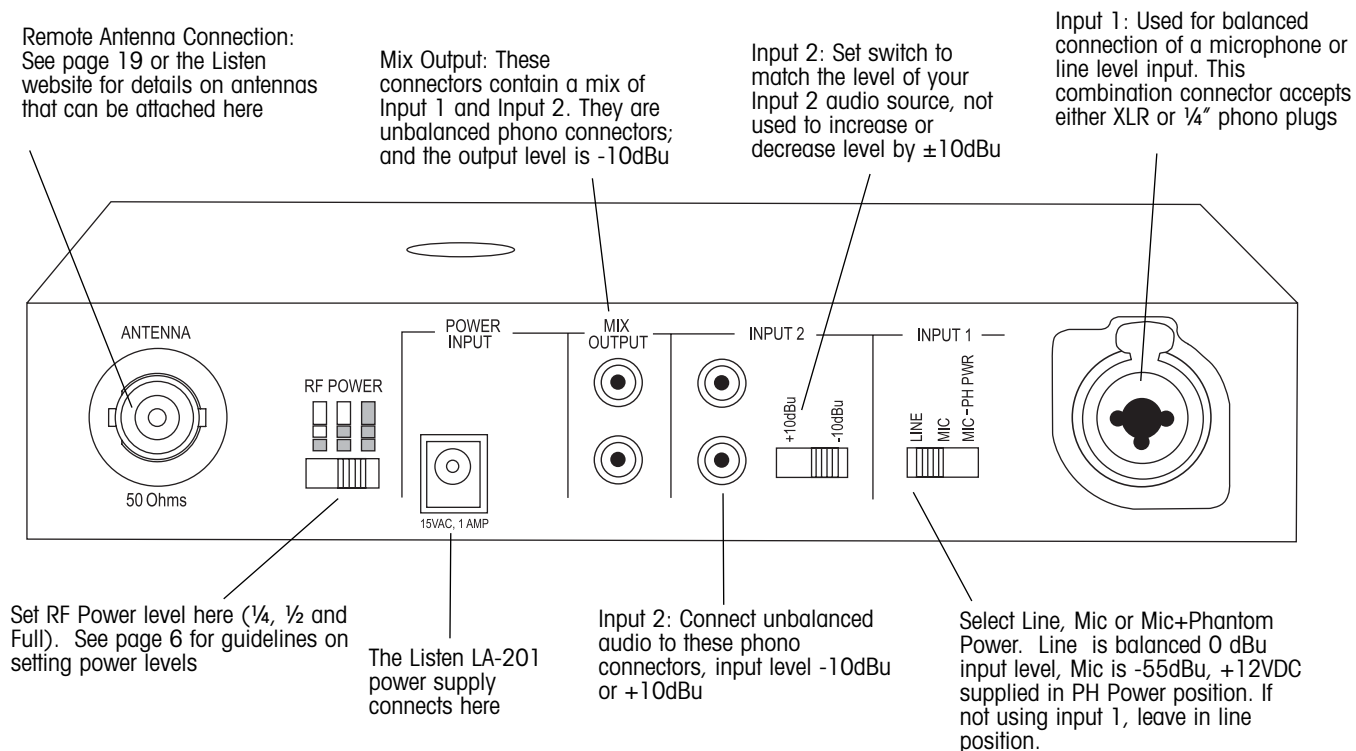

## LT-800 Setup Instructions


### 1 Unpack the Product

Remove outer packaging and plastic cover. Inspect for physical damage.


### 2 Mount in Rack (if necessary)

If rack mounting the unit, install the optional rack mount kit (part LA-326) according to the instructions included with the kit, then install the LT-800 in the rack.

**NOTE:** If rack mounting, you will need to use a rear connection antenna.




Rack Mount with dual unit installed  
Shown with LR-100 and LT-800




Rack Mount with single unit installed  
Shown with LT-800

### 3 Connect Antenna

Connect the antenna (not included) according to the installation instructions. Only use an antenna supplied by Listen. If you are connecting the antenna directly to the top of the LT-800, you will need to remove the rubber plug on top of the unit. If you are using a remote antenna connected to the rear of the unit, do not connect an antenna to the top connector. See page 19 for antenna options, or refer to the Listen website for remote antenna options.

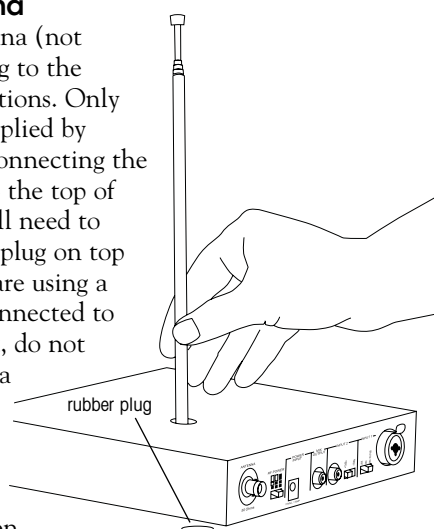

LT-800 shown with top mount antenna  
connected through top of unit  
(part numbers LA-101,  
LA-106 (72 MHz) or  
LA-102 (216 MHz))




LA-122 Remote Antenna  
See RF Reception Maximization  
Strategies and Coaxial Cable on  
page 10.

Coax antenna connection.  
Rear of LT-800 shown.

### 4 Connect Power

Plug the power supply into the power connector on the back panel, then plug the power supply into an outlet. Only use a Listen approved power supply (The LA-201, an in-line transformer, is the approved power supply for this unit).

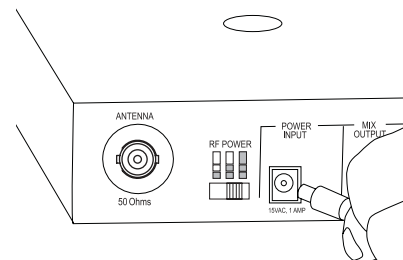


### 5 Select Phonak Compatibility (if necessary)

If you will be using Phonak receivers with your LT-800 (216 MHz only), the transmitter can become completely compatible through software control. When switched to this mode, the LT-800 transmitter will display the Phonak channels. By integrating Phonak channels and compatibility into the LT-800-216, it is more convenient to use Phonak receivers with Listen transmitters. ([www.phonak.com](http://www.phonak.com))

#### To Select Phonak Mode:

Press and hold down the channel select "up" button while powering on the unit. The LCD will display a "P" momentarily upon power up indicating that the transmitter is in the Phonak Channel Mode. The channels displayed will now match Phonak channels. To return to the Listen channel designations, repeat this process. The LCD will display an "L" momentarily upon power up indicating that you are in the Listen Channel Mode.

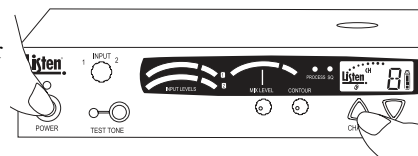


### 6 Select Channel Mode (if necessary)

Your transmitter has been shipped to you with only a limited number of channels available (Basic Mode). If all channels (Expanded Mode) are required, use the following procedure.

#### To Select Expanded Mode:

To enable or disable the Expanded Mode, press and hold the channel select "down" button while powering on the unit. When the Basic Mode is enabled, "L/O" (lockout) will be displayed on the LCD display as shown below. This indicator is extinguished when in the Expanded Mode.

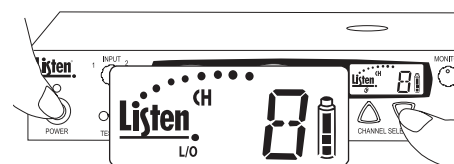


## LT-800 Setup Instructions continued

### 7 Set SQ (Super Quiet) and Process Features

Your transmitter is shipped to you with SQ (super quiet) enabled and Process disabled. For a detailed description of these features and when to use them, please refer to page 9.


*To Disable or Enable SQ and Process Features:*  
With the unit on press and hold the channel select "Down" button for 8 seconds. The program (PGM) icon will appear on the LCD.

Once in the program mode,  the SQ and Process features can be turned on and off by pressing the channel select buttons.

- Press the channel select "Up" button to toggle between Process On and Off.
- Press the channel select "Down" button to toggle




between SQ On and Off.  
If the green LED is



displayed on the front panel, that feature is enabled. Once you have enabled or disabled the features as desired, let the transmitter exit the program mode by waiting 5 seconds.

### 8 Set RF Power

Set the RF POWER switch on the back of the unit to Full, 1/2 or 1/4 (Level is indicated on the LCD display). The amount of transmitted RF power that you will need depends on your application. If you are operating multiple transmitters in the same environment, it is best to set the transmitter's output power to its lowest level to reduce the possibility of interference.

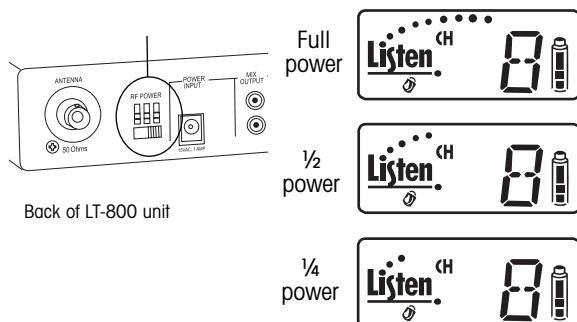


### 9 Connect Audio Inputs

The LT-800 has two audio input options: Input 1 and Input 2. Input 1 is a balanced connection using either an XLR or 1/4" phono connector. Input 2 has two unbalanced mixing phono connectors. Use Input 1 if you are using a microphone or if you have a balanced connection such as from a professional audio mixer (you can also use Input 1 for unbalanced connections). Use Input 2 to connect to an unbalanced audio source.


#### Input 1

Connect the audio source(s) to one or both audio input connections. Input 1 offers a choice of balanced XLR or 1/4" phono connector.

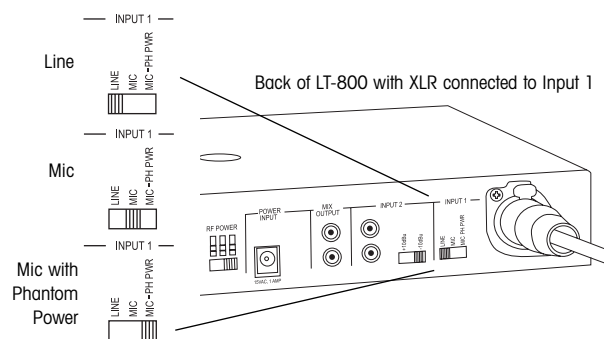


Plug your microphone into Input 1 and move the input select switch to Mic (for dynamic microphones) or Mic + PH Power (for condenser microphones).

Plug your balanced or unbalanced audio source into Input 1. Use the following diagram.

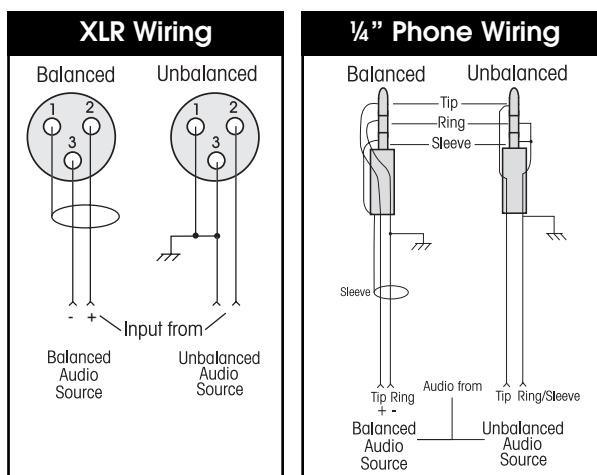

#### Input 2

Plug your unbalanced audio source into Input 2 and select the audio level switch for -10dBu or +10dBu, to match the audio level coming from your equipment.





## LT-800 Operating Instructions


## LT-800 Audio Control

### 1 Power Unit On

Turn power on by pressing the power button.

### 2 Select a Channel

Select the transmit channel by pressing the channel select UP and DOWN buttons. See Channel Selection on page 11 for more information.

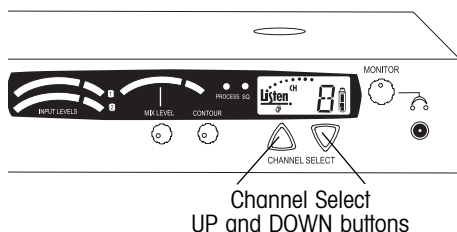

NOTE: The LT-800 is shipped with only limited channels (Basic Mode). To select from all channels (Expanded Mode) refer to page 5. (for a more detailed description of Basic and Expanded Mode refer to page 9)


### 3 Lock on Channel

Once you determine your transmit channel, you can lock the transmitter on that channel. To lock a channel hold the Channel Select "Up" button for 3 seconds until the padlock icon appears on the display. To unlock, repeat this process and the padlock icon will disappear.



### 4 Test Tone (if necessary)


To broadcast a test tone, press the test tone button. This helps to test receivers when no audio source is available.



Press Test Tone button here


### 1 Adjust Audio Input Level

Adjust the input knob counterclockwise to add gain to Input 1. This will decrease gain to Input 2. Adjust input knob clockwise to add gain to Input 2. This will decrease gain to Input 1. If you have two audio sources connected to both Input 1 and 2, adjust the level of one input using the VU meter, then adjust the output level of the other audio source. Adjust the input level until the left VU meter(s) occasionally illuminate the red LEDs. Illumination of the red LEDs indicates the unit is in limiting. Limiting is required so that the unit does not over-modulate the transmitter. If you don't want any audio limiting to occur, make sure the red LEDs never illuminate. If you want a highly limited signal, turn the audio gain up so the red LEDs illuminate often.




### 2 Adjust Contour

Adjust the Contour knob counterclockwise if your audio source is mostly voice. Adjust the knob clockwise if your audio source is mostly music. The Contour knob adjusts the relative equalization of the unit. This equalization boosts or cuts frequencies above 5 kHz.



### 3 Adjust Mix Level

Adjust the mix level until the right VU meter occasionally illuminates the red LED. This is the level adjustment for the combined output from Input 1 and Input 2.

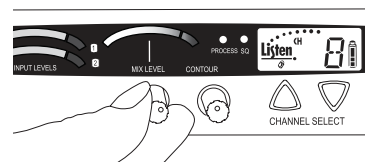

## LT-800 Compatibility with Other Manufacturers

If you are using another manufacturers' receivers with the LT-800, determine the frequency of their receivers then refer to Listen's Frequency Compatibility Tables (pages 12-14) to find the LT-800 channel that corresponds with the receiver's frequency. We recommend verifying corresponding channel designations on these tables to ensure compatibility and provide the best possible reception.

The LT-800 is Phonak compatible and can be set to display Phonak specific channels. See page 5 to set Channel Mode and page 14 for specific channel designations.

## Listen SQ™ (Super Quiet) - Improving Your Listening Experience

People are accustomed to listening to low noise, high fidelity audio (delivered via CD, DVD, etc.). FM radio systems, such as those made by Listen, have more inherent noise compared to most sound systems. To minimize noise, Listen uses a noise reduction technology called ListenSQ™. Both the transmitter and receiver must have the SQ feature enabled to achieve the desired results. SQ is available on new Listen systems, including the system you received in this shipment. If you are planning to use this product with older Listen systems that do not have Listen SQ, or equipment not manufactured by Listen, you must disable Listen SQ.

Your Listen LT-800 has been shipped to you with the SQ feature enabled. You may need to disable the SQ function for one or more of the following reasons:

1. You are using your new Listen LT-800 with older version Listen receivers that do not have the SQ function.
2. You are using your new Listen LT-800 with equipment supplied by other manufacturers (Listen is the only manufacturer using SQ Technology).
3. You expect that end users will bring and use their own receivers that don't have the SQ function.

NOTE: See page 6 to enable or disable SQ (Super Quiet).

### SQ Summary

- SQ is NOT squelch
- SQ improves noise performance by at least 20dB
- SQ is NOT compatible with older version Listen products
- SQ is NOT compatible with other manufacturers' products
- To work properly, SQ must be enabled for both the transmitter and receivers
- SQ can be disabled to permit operation with older Listen products or other manufacturers' products

## Process Mode

Process mode is used for Audio Gain Control (AGC). With the process mode enabled, the LT-800 will automatically adjust for inconsistent signal input levels by raising or lowering the signal level accordingly to provide a consistent sound output level. This feature should be used in applications where a consistent sound level is important and the input levels vary substantially. Typically you would not want to engage the Process Mode when a speaker's emphasis is critical to the message they are conveying.

## Basic and Expanded Mode

In the default Listen channel mode, only the most commonly used channels are available. This is called "Basic Mode". When the LT-800 is in Basic Mode, "L/O" (lock-out) will be displayed on the LCD, meaning some transmission channels are unavailable. If the channel needed is not available in Basic Mode, access to all transmission channels is achieved in "Expanded Mode". To access Expanded Mode press and hold the channel select "down" button while powering on the unit. To return to Basic Mode, repeat the same process of powering on the unit while holding the "down" button.

## RF Reception Maximization Strategies

For proper and dependable operation, Listen receivers need to receive a strong and consistent signal from the originating transmitter. Note that on portable receivers the headset wire is the receiving antenna. The following strategies should be used maximize this signal:

1. When designing and installing your system, keep in mind that the location of both the transmitting and receiving antennas is critical to maximize broadcast range.
2. Eliminate or minimize obstructions between the transmitting and receiving antenna.
3. Minimize the distance between the transmitting and receiving antennas.
4. Move transmitting and receiving antennas away from metal or conductive objects.
5. Place the transmitting antenna as high as possible.
6. Orient both transmitting and receiving antennas vertically.
7. Position the RF Power switch on the back of the LT-800 to full RF Power, unless lower power is necessary (see page 6).
8. Keep coaxial cable from transmitter to antenna as short as possible.

**CAUTION:** When installing antennas, ensure the antenna is clear of power lines.

Coaxial cable, connectors, and optional antenna mounting kits are available from Listen. See page 19, visit [www.ListenTech.com](http://www.ListenTech.com) or ask your dealer for details.

## Coaxial Cable

The antenna for the LT-800 can be mounted directly on the unit if desired. However, you may find that the unit will provide better performance when the antenna is located elsewhere. If you plan to mount the antenna in a different location other than the top of the unit, you must use cable and connectors rated at 50 ohms. Although cable used for cable TV installations looks similar to this cable, it will not work with your Listen system.

If you need to run cable over a length greater than 50 feet for 216 MHz applications or greater than 100 feet for 72 MHz applications or to maximize broadcast range, Listen recommends that you use RG-8 cable rather than RG-58. RG-8 is a lower loss cable, meaning that more of your signal will reach the antenna.

Long cable runs can result in signal degradation due to the “loss” characteristics of the cable. When using RG-58 with a 72 MHz transmitter, there is an average\* loss of 4 dB per 100 feet of cable and at 216 MHz using RG-58 an average\* loss of 8 dB per 100 feet of cable. (A 3dB loss means half of your power has been lost.) However, it is better to suffer coaxial power loss than to try to shoot your signal through obstacles! Obstacles, especially metal, can create drop-outs or reflections of your signal that will result in poor listening conditions.

\*NOTE: There are many varieties of 50 ohm, RG-58 and RG-8 cables. You may purchase a cable that is better or worse than this value. Please check with the cable vendor or manufacturer for exact specifications.

## Channel Selection

It is important to choose channels that are free from interference to achieve proper operation of your Listen equipment. This process is trial and error. Before turning on the transmitter, listen to the wide band channels on the receivers (lettered channels at 72 MHz and channels that start with a “2” for 216 MHz when using a Listen receiver). Listen to the audio through the headphone or via the speaker and choose a channel with the least amount of interference. Unless you are interfacing with an existing narrowband transmission system, always use a wide band channel.

### If you are using multiple channels follow this process:

1. **Same Space** If you are using multiple transmitters in the same space, the highest number of channels that will work simultaneously is six at 72 MHz and three at 216 MHz. With all of the transmitters off, listen for interference on all the wide band channels with a Listen receiver. Using the frequency compatibility tables on pages 12-13, eliminate any channels that have noticeable interference. Now choose the channels with the widest channel spacing. It is recommended that adjacent channels be spaced at least 300k Hz apart. If there is no interference the following channels are recommended. For a 72 MHz system, use channels A, C, E, I, J and H. For a 216 MHz system, use channels 2A, 2K and 2V.
2. **Distributed Spacing** If you are using transmitters that are distributed over a large area, you can achieve more simultaneous broadcast channels. However, it is critical that your receiver(s) be located as close to its transmitter as possible. You can use adjacent channels (see frequency compatibility tables on pages 12-13) in this case as long as the adjacent channel transmitter is at least 50% further away from the receiver than the original transmitter. Example: The transmitter for the receiver on channel E is 100 feet from the receiver. The adjacent channel transmitter on channel D should be at least 150 feet away.

It is highly recommended that after channel selection has been achieved, you lock the channel so that it cannot be changed by the user. To accomplish LOCK on the LT-800, press the “UP” button for 3 seconds. Repeat the process to unlock.

### Notes in regard to using 72 MHz and 216 MHz systems:

1. 72 MHz is a secondary frequency band. This means that other transmitters are licensed to use these frequencies. Thus, you may experience interference from paging transmitters and other types of transmissions. You will need to find a clear channel by listening to all the wide band channels.
2. 216 MHz is a primary frequency band and no other types of transmissions are authorized to use it. Thus, you will find the highest probability of clear channels in this band. However, you may experience intermodulation of the TV Channel 13 aural carrier if there is a channel 13 transmitter in your area and you are close to the transmitter. If you cannot find a clear channel in 216 MHz band due to channel 13, it is recommended that you switch to a 72 MHz system.

### Wide Band Recommendation

Listen recommends that you always use a wide band channel unless you need to be compatible with existing narrow band receivers from other manufacturers. Wide band channels have lower noise than their narrow band counterparts.

#### At 72MHz

The LT-800 at 72 MHz operates on 17 wide band channels and 40 narrow band channels.

- Letters= Wide Band Channels (Example: E)
- Numbers= Narrow Band Channels (Example: 32)

#### At 216MHz

The LT-800 at 216 MHz operates on 19 wide band channels and 38 narrow band channels.

- “2” as left digit= Wide Band Channel (Example: 2C)
- “1” and “3” as left digits= Narrow Band Channels (Examples: 1A; 3R)

## 72 MHz Compatibility Chart

Frequency MHz	Listen	Phonic Ear	Comtek	Phonak	Williams*	Gentner	Telex	Drake
72.0250	1	1	1	A1	(11, 1)			
72.0500					(2)	1		
72.0750	2	2	2	A2	(12, 3)			
72.1000	A	A	A	A	A, (13, 4)	2	A	72.1
72.1250	3	3	3	A3	(14, 5)			
72.1500					(6)	3		
72.1750	4	4	4	A4	(15, 7)			
72.2000	K	K	K	K	K, (8)	4	B	72.2
72.2250	5	5	5	K5	(16, 9)			
72.2500					(10)	5		
72.2750	6	6	6	K6	(17, 11)			
72.3000	B	B	B	B	B, (18, 12)	6	C	72.3
72.3250	7	7	7	B7	(19, 13)			
72.3500					(14)	7		
72.3750	8	8	8	B8	(20, 15)			
72.4000	N	N	N	N	N, (16)	8	D	72.4
72.4250	9	9	9	N9	(21, 17)			
72.4500					(18)	9		
72.4750	10	10	10	N0	(22, 19)			
72.5000	C	C	C	C	C, (23, 20)	10	E	72.5
72.5250	11	11	11	C1	(24, 21)			
72.5500					(22)	11		
72.5750	12	12	12	C2	(25, 33)			
72.6000	O	O	O	O	O, (24)	12	F	72.6
72.6250	13	13	13	O2	(26, 25)			
72.6500					(26)	13		
72.6750	14	14	14	4	(27)			
72.7000	D	D	D	D	D, (28)	14	G	72.7
72.7250	15	15	15	D5	(29)			
72.7500					(30)	15		
72.7750	16	16	16	D6	(30, 31)			
72.8000	P	P	P	P	P, (32)	16	H	72.8
72.8250	17	17	17	P7	(31, 33)			
72.8500					(34)	17		
72.8750	18	18	18	P8	(32, 35)			
72.9000	E	E	E	E	E, (33, 36)	18	I	72.9
72.9250	19	19	19	E9	(34, 37)			
72.9500					(38)	19		
72.9750	20	20	20	E0	(35, 39)			
74.6250	33	33	33	E3	(36, 40)			
74.6500					(41)	20		
74.6750	34	34	34	E4	(37, 42)			
74.7000	I	I	I	I	I, (38, 43)	21	O	
74.7250	35	35	35	I5	(39, 44)			
74.7500					(45)	22		
74.7750	36	36	36	I6	(40, 46)			
75.2250	37	37	37	I7	(41, 47)			
75.2500					(48)	23		
75.2750	38	38	38	I8	(42, 49)			
75.3000	J	J	J	J	J, (43, 50)	24	P	
75.3250	39	39	39	J9	(55, 51)			
75.3500					(52)	25		
75.3750	40	40	40	J0	(45, 53)			
75.4000	R	R	R	R	R, (54)	26	Q	
75.4250	21	21	21	R1	(46, 55)			
75.4500					(56)	27		
75.4750	22	22	22	R2	(47, 57)			
75.5000	F	F	F	F	F, (48, 58)	28	J	75.5
75.5250	23	23	23	F3	(49, 59)			
75.5500					(60)	29		
75.5750	24	24	24	F4	(50, 61)			
75.6000	S	S	S	S	S, (62)	30	K	75.6
75.6250	25	25	25	S5	(51, 63)			
75.6500					(64)	31		
75.6750	26	26	26	S6	(52, 65)			
75.7000	G	G	G	G	G, (53, 66)	32	L	75.7
75.7250	27	27	27	G7	(54, 67)			
75.7500					(68)	33		
75.7750	28	28	28	G8	(55, 69)			
75.8000	T	T	T	T	T, (70)	34	M	75.8
75.8250	29	29	29	T9	(56, 71)			
75.8500					(72)	35		
75.8750	30	30	30	T0	(57, 73)			
75.9000	H	H	H	H	H, (58, 74)	36	N	75.9
75.9250	31	31	31	H1	(59, 75)			
75.9500					(76)	37		
75.9750	32	32	32	H2	(60, 77)			

Wideband frequencies are indicated in highlighted rows. The highlighted channels also indicated those channels available in the “basic” mode (default). All channels can be accessed when in the “expanded” channel mode (see page 9 for more information).

## 216 MHz Compatibility Chart

Frequency MHz	Listen	Phonic Ear	Comtek	Phonak	Williams	Gentner	CSI	AVR	Light Speed
216.0125	1A		1	1				C01	N01
216.0250	2A	41	41	41		1	1		
216.0375	3A		2	2					
216.0625	1B		3	21					
216.0750	2B	42	42	42		2	10		
216.0875	3B		4	4					
216.1125	1C		5	5				C05	
216.1250	2C	43	43	43	A	3	6		
216.1375	3C		6	22					
216.1625	1D		7	23					
216.1750	2D	44	44	44	B	4	14		
216.1875	3D		8	8					
216.2125	1E		9	9				C09	N09
216.2250	2E	45	45	45	C	5	2		
216.2375	3E		10	24					
216.2625	1F		11	25					
216.2750	2F	46	46	46	D	6	11		
216.2875	3F		12	12				C12	N12
216.3125	1G		13	13					
216.3250	2G	47	47	47	E	7	7		
216.3375	3G		14	26					
216.3625	1H		15	27					
216.3750	2H	48	48	48	F	8	15		
216.3875	3H		16	16				C18	N18
216.4125	1J		17	17				C21	
216.4250	2J	49	49	49	G	9	18		
216.4375	3J		18	18					
216.5125	1K		21	61					
216.5250	2K	51	51	29	H	10	3		
216.5375	3K		22	62					
216.5625	1L		23	28					
216.5750	2L	52	52	52	I	11	12		
216.5875	3L		24	64				C24	N64
216.6125	1M		25	65				C25	
216.6250	2M	53	53	53	J	12	8		
216.6375	3M		26	81					
216.6625	1N		27	82					
216.6750	2N	54	54	54	K	13	16		
216.6875	3N		28	68					
216.7125	1P		29	69				C29	
216.7250	2P	55	55	55	L	14	19		
216.7375	3P		30	83					
216.7625	1R		31	84					
216.7750	2R	56	56	56		15	4		
216.7875	3R		32	72				C32	N72
216.8125	1S		33	73				C33	
216.8250	2S	57	57	57			13		
216.8375	3S		34	76					
216.8625	1T		35	85					
216.8750	2T	58	58	58			9		
216.8875	3T		36	86					
216.9125	1U		37	77				C37	N77
216.9250	2U	59	59	59			17		
216.9375	3U		38	88					
216.9625	1V		39	79				C39	
216.9750	2V	60	60	60			5		
216.9875	3V		40	80				C40	N80

Wideband frequencies are indicated in highlighted rows. The highlighted channels also indicated those channels available in the “basic” mode (default). All channels can be accessed when in the “expanded” channel mode (see page 9 for more information).

## Phonak Frequency Chart

Frequency MHz	Listen	Phonak
216.0125	1A	1
216.0250	2A	41
216.0375	3A	2
216.0625	1B	21
216.0750	2B	42
216.0875	3B	4
216.1125	1C	5
216.1250	2C	43
216.1375	3C	22
216.1625	1D	23
216.1750	2D	44
216.1875	3D	8
216.2125	1E	9
216.2250	2E	45
216.2375	3E	24
216.2625	1F	25
216.2750	2F	46
216.2875	3F	12
216.3125	1G	13
216.3250	2G	47
216.3375	3G	26
216.3625	1H	27
216.3750	2H	48
216.3875	3H	16
216.4125	1J	17
216.4250	2J	49
216.4375	3J	18
216.5125	1K	61
216.5250	2K	29
216.5375	3K	62
216.5625	1L	28
216.5750	2L	52
216.5875	3L	64
216.6125	1M	65
216.6250	2M	53
216.6375	3M	81
216.6625	1N	82
216.6750	2N	54
216.6875	3N	68
216.7125	1P	69
216.7250	2P	55
216.7375	3P	83
216.7625	1R	84
216.7750	2R	56
216.7875	3R	72
216.8125	1S	73
216.8250	2S	57
216.8375	3S	76
216.8625	1T	85
216.8750	2T	58
216.8875	3T	86
216.9125	1U	77
216.9250	2U	59
216.9375	3U	88
216.9625	1V	79
216.9750	2V	60
216.9875	3V	80

Wideband frequencies are indicated in highlighted rows. The highlighted channels also indicated those channels available in the “basic” mode (default). All channels can be accessed when in the “expanded” channel mode (see page 9 for more information).



## LT-800 Troubleshooting

### The LT-800 has no power

Make sure the LA-201 power transformer is connected to a power source and is connected to the jack marked "Power Input". Make sure the POWER button is pressed in.

### There is no audio or the audio level is too low

Make sure that your audio source is properly connected to Input 1 and/or Input 2. The Input 1 or Input 2 switches must be in the correct position for the appropriate input level. For example: if you are using the output of a mixer on Input 2, the switch should be in the -10dBu position. If it were to be in the +10dBu position, the level would be too low. Also, check the Input knob to ensure it is properly adjusted. You should be able to see the VU meter deflect on Input 1 or Input 2 corresponding with the input level of the audio source. You can listen to the audio source by connecting a headset to the front panel jack and adjusting the Monitor volume control.

If the level of audio into the transmitter is low and can't be corrected using the level input switches, the audio processor can be turned on to boost the signal (see page 6 to set, page 9 for description of Process Mode).

### The audio is distorted

Check to make sure you have the input level select switches in the proper position. You may be providing too much audio level for the input stage to handle. Make sure the SQ mode is set correctly on both the LT-800 and the receivers you are using. If your receivers do not have SQ, make sure the SQ mode is turned off (see page 6).

### There is hum in the audio

Make sure you have properly grounded the audio source to the LT-800. Check the connections from the audio source to the LT-800. If you can, try to use a balanced audio source - this will reduce the chance of creating hum. Connect a ground wire from the LT-800 to ground and/or to the ground of the source audio.

### There is a tone

The Test Tone button has been pressed (its LED light is on). Push the Test Tone button to turn off the tone.

### The Audio Input 1 sounds "finny"

If you are using an unbalanced audio source, make sure Pin 3 on the XLR or the ring on the 1/4" plug is grounded (see page 6).

### I cannot pick up the signal on the receiver

Check to make sure the receiver and the transmitter are using the same frequency band (i.e. 72 MHz or 216 MHz) and that they are on the same channel. Make sure the LT-800 has an antenna connected. Ensure that the receiver has an antenna (for portable products the headset is the receiving antenna).

### I can pick up the signal on the receiver, but it sounds like it's not tuned in

Check to make sure the transmitter and receiver are on exactly the same channel. It's a good idea to lock the channels once they have been set. To lock the LT-800, press the UP button for a 3 seconds (see page 7).

## LT-800 Troubleshooting

### **I'm using another brand of receiver - how do I tell which channel to use**

Refer to Listen's Frequency Compatibility Tables (pages 12-13). Adjust Listen's transmitter to the same frequency as the other major brand. Since Listen products can access 57 channels, they will most likely receive on the same fixed channel or channels of other major brands. If you are using another brand of receiver, make sure you have turned off the SQ feature on the Listen product(s).

### **There is not sufficient range**

First make sure that the receivers you are using are operating properly, then make sure that you have an antenna connected either to the top of the LT-800 transmitter or connected to the back of the unit (but not both!). The antenna should be as high as possible and free of obstacles. In addition make sure you are using the correct antenna type for your unit. You might want to use a remote antenna (provided by Listen) that can be mounted on a mast or wall. Try using different frequencies to find one with less interference.

### **There is interference in my transmission**

Ensure that the transmitter and receivers are on the same channel. Verify that there are no other transmitters on the same channel or a close channel to the one exhibiting interference. Try different channels until you find a clear channel. If this does not work, try a different frequency band (i.e. if you are using 72 MHz, try 216 MHz or vice versa). Please contact Listen support for assistance and a return authorization (RMA) number to exchange product for alternate frequency equipment.

### **End users are adjusting the unit**

First, lock the channel by pressing and holding the channel select UP button for 3 seconds. Consider removing the Input, Mix Level and Contour knobs. You can order a rack mount kit from Listen which offers a security cover that will limit access to the unit.

### **I am using other manufacturers' receivers and the sound is distorted**

The receiver is probably not designed to handle the +25 kHz deviation of the Listen transmitter. This can be corrected by turning the Mix Level knob down. Another possibility is that you have enabled the SQ function of the LT-800, and this feature is not available in other companies' products. You will need to disable SQ in this event (see page 6).

If you are using Phonak receivers, the transmitter is capable of operating in the Phonak mode (please refer to page 5).

### **Several transmitters are operating in the same environment**

For this, you'll need to choose your transmitting frequencies carefully. See page 11 for more details.

### **Can I have two antennae connected to my transmitter**

No. The LT-800 transmitter can use only one antenna connection at a time. You may connect either a top mount antenna through the top antenna port, or a remote antenna connected to the BNC connection on the rear of the unit. If multiple antennae are simultaneously connected to both ports the transmitter will have extremely poor broadcast performance and range.

## Compliance Notice

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) These devices may not cause harmful interference, and (2) these devices must accept any interference received, including interference that may cause undesirable operation.

### **Listen's LT-800 Transmitter (216 MHz only)**

Listen's LT-800 transmitter is authorized by rule under the Low Power Radio Service (47 C.F.R. Part 95) and must not cause harmful interference to TV reception or United States Navy SPASUR installations. You do not need an FCC license to operate these transmitters. These transmitters may only be used to provide: auditory assistance to persons with disabilities, persons who require language translation, or persons in educational settings; health care services to the ill; law enforcement tracking services under agreement with a law enforcement agency; or automated maritime telecommunications system (AMTS) network control communications. Two-way voice communications and all other types of uses not mentioned above are expressly prohibited.

This device must be installed by a trained audio professional or certified dealer of Listen. The user can't make any modifications to the unit without expressed written consent of Listen Technologies Corporation. Any modifications made will void the FCC compliance, Listen warranty and the user's authority to operate Listen's equipment.

## FCC Statement

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment has been certified to comply with the limits for a class B computing device, pursuant to FCC and IC Rules. In order to maintain compliance with FCC and IC regulations, shielded cables must be used with this equipment. Operation with non-approved equipment or unshielded cables is likely to result in interference to radio and TV reception. The user is cautioned that changes and modifications made to the equipment without the approval of manufacturer could void the user's authority to operate this equipment.

## Warranty

Listen Technologies Corporation (Listen®) warrants the LT-800 Stationary Transmitter to be free from defects in workmanship and material under normal use and conditions for the useful lifetime of the product from date of purchase. This warranty is only available to the original end purchaser of the product and cannot be transferred. Warranty is only valid if warranty card has been returned within 90 days of purchase. This warranty is void if damage occurred because of misuse or if the product has been repaired or modified by anyone other than a factory authorized service technician. Warranty does not cover normal wear and tear on the product or any other physical damage unless the damage was the result of a manufacturing defect. Listen is not liable for consequential damages due to any failure of equipment to perform as intended. Listen shall bear no responsibility or obligation with respect to the manner of use of any equipment sold by it. Listen specifically disclaims and negates any warranty of merchantability or fitness of use of such equipment including, without limitation, any warranty that the use of such equipment for any purpose will comply with applicable laws and regulations. The terms of the warranty are governed by the laws of the state of Utah, U.S.A. Listen will only accept returned products with prepaid shipping and with a return merchandise authorization number (RMA). To receive a return merchandise authorization number call 1.800.330.0891 or 1.801.233.8992. Please see [www.ListenTech.com](http://www.ListenTech.com) or contact Listen for complete warranty details.

## Contacting Listen


If technical service is needed, please contact Listen. Pre-authorization is required before returning Listen products. If products were damaged in shipment, please contact the carrier, then contact Listen for replacement or repair requirements payable by the carrier.

Listen's corporate headquarters are located in Sandy, Utah U.S.A. and are open Monday through Friday, 8am to 5pm Mountain Time.

<b>Address:</b>	8535 South 700 West Suite A Sandy, UT 84070-2515 U.S.A.	<b>Web Site:</b>	<a href="http://www.ListenTech.com">www.ListenTech.com</a>
		<b>Email:</b>	<a href="mailto:techsupport@ListenTech.com">techsupport@ListenTech.com</a>
<b>Phone:</b>	1.801.233.8992 1.800.330.0891 (North America)		
<b>Fax:</b>	1.801.233.8995		

## Optional Accessories

### Antenna Options

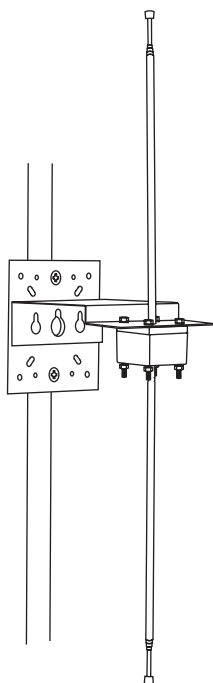


**LA-122 Universal Antenna Kit**


The single solution for all of your indoor remote antenna needs. Includes: 72 and 216 MHz components; flexible and rigid dipoles and monopole radials; hardware for multiple mounting configurations; and 25 feet (7.6m) of RG-58 coax cable.




**72 MHz Helical**  
(Top Mount)  
LA-101 for 72 MHz



**90 Degree Helical**  
(Rear Mount)  
LA-123 for 72 MHz or  
LA-124 for 216 MHz




**Telescoping**  
(Top Mount)  
LA-106 for 72 MHz or  
LA-102 for 216 MHz



**216 MHz Ground Plane**  
(Remote Mount, outdoor)  
LA-107 for 216 MHz


### Rack Mount Options



**LA-326 Rack Mounting Kit**

Includes components for single and dual rack configuration and a security cover

NOTE: Rack mounted units cannot use the LA-106, LA-102 or LA-101 top mounted antenna.

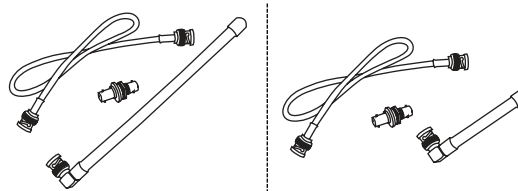


**Antenna Kit for the LA-326 Rack Mount Kit**  
LA-125 for 72 MHz and LA-126 for 216 MHz  
(LA-326 also required)

## Optional Accessories continued


### Cable & Connectors Options



**RG-58 Coaxial Cable**  
LA-112

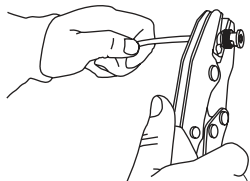

**Installation of BNC Connectors**  
LA-114



**BNC Connector for RG-58**  
LA-127




**BNC Connector for RG-8**  
LA-128

**RG-8 Coaxial Cable**  
LA-113

available by the foot

### Microphone Options



**Lapel**  
LA-261




**Over-the-Head**  
LA-262




**Over-the-Ear**  
LA-268



**Noise Cancelling**  
LA-270



**Hand Held**  
LA-274



**Collar**  
LA-276



**Conference**  
LA-277



**Behind-the-head**  
LA-278



**Phono Converter**  
LA-280

NOTE: To use Listen microphones you must use a converter (LA-280) to adapt the 3.5 mm connection to a 1/4" phono connection.





[www.ListenTech.com](http://www.ListenTech.com)

Listen Technologies Corporation  
8535 South 700 West, Suite A  
Sandy, Utah 84070-2515 U.S.A.  
Telephone: 1.801.233.8992  
Toll Free (North America): 1.800.330.0891  
Fax: 1.801.233.8995  
E-mail: [info@ListenTech.com](mailto:info@ListenTech.com)