

# BT-7228 / Bluetooth Foldable Keyboard

## (Jupiter Series)

### User's Manual

Congratulations and thanks you choosing the Lexking BT-7228(Jupiter) Bluetooth foldable keyboard as your means of communication between Apple Smartphone(iPhone 3GS4/4S), iPad(iPad 2, New iPad) and most of Android OS 3.0 or 4.0 above device. BT-7228, the “Jupiter”series is a special design by magnets and Pogo Pin connection, it is a unique designed, manufactured by Lexking Technology Co., Ltd.

Before you starting use this device, please detail READ this user's manual:

#### Contents:

- 1.Package and Encloses
- 2.OS compatible
- 3.Prodcut function description
- 4.Operating
- 5.Troubleshooting
6. Product Guarantee and Announcement
- 7.Radio frequency Warning

#### **Package and Encloses**


- 1.BT-7228 Foldable Keyboard\*1  
(260 mAh capacity Lithium-Ion rechargeable battery embedded inside)
- 2.USB cable\*1
- 3.Stand\*1(only can support iPhone or Smartpone)
- 4.Cloth Bag\*1-Optional
- 5.User's manual\*1

#### **OS Compatible:**

- 1.iOS : iPhone 4S/4/3GS, iPad, iPad2, New iPad
- 2.Android : Compatible part of Android OS 2.3.5 above and all Android OS 3.0, 4.0 above device
- 3.Mac OS X : Mac OS 10.6 above
- 4.Window OS : XP / Vita / 7  
(Easily to link Notebook or external Bluetooth dongle embedded with Personal Computer)

#### **Product profile and function descriptions**

(iOS means iPhone, iPad device OS)

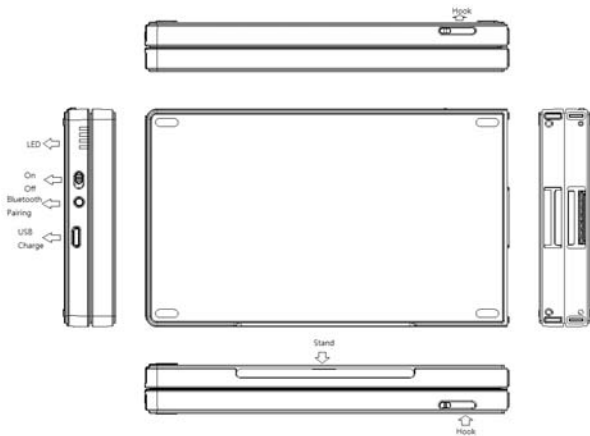

LED signal description(4 LEDs from up to down)

LED1→(Blue color)

When it glitter 3 times, it represent power on status or glitter is stand for pairing status.

LED2→(Blue color)

It represent upper case status of your press CapsLock key when LED light on.

LED3→(Red color)

When you put attached USB cable into Micro USB connector during charging battery power, this LED will lighted on till battery charge full then snuff out.

LED4→(Blue color)

When this LED glitter, it represent battery low status during you typing each key, it need to recharge battery power immediately, if you don't recharge battery, LED will glitter untill power all shut down.

Slider Switch→

On/Off slider power switch

I D paring switch→

Bluetooth pairing button

USB 充電接頭

Micro USB connector for Charge

Smartphone Stand

Internal stand only for Smartphone use

Metal Hook

Support BT-7228 Left/Right side keyboard stable connect in typing when you seated then put BT-7228 on thigh.

**Operating/使用方式：**

Before you starting use this keyboard, please detail READ below operating information;

**A.Please recharge full battery power before you first time use BT-7228)**

Charging Way:

(Please put standard USB “A” type connector into you PC or Notebook then put another side micro USB connector into BT-7228 foldable keyboard, it will automatically charge)

**B.First step, Connect to your iPhone or iPad**

- 1.Take out BT-7228 from package box
- 2.Open foldable keyboard then close put Left-Right side keyboard, it will automatically connect by magnets force.
- 3.Up push On/Off button to On status then LED1 will glitter, it is mean power on status for waiting pairing with iPad or iPhone.
- 4.Open your iDevice Bluetooth device searching mode for searching then you will find “BT-7228 or BT-7228JA” information shown on your iDevice, please select the icon then press “Enter” key, your iDevice will automatically connect with BT-7228.
- 5.When you will not use BT-7228 for long time, please remember to switch off button then cut off power for saving power. If you want to use it again, you just turn on power on switch then BT-7228 will automatically connect with your iDevice, it is no need to pairing again.

**C.Android and Mac OS 10. X above connect**

Follow above item “A” procedure are similar to connect with part of Android OS 2.3.5 above, all 3.0 above Tablet. OS 4.0 Smartphone and Mac OX 10.6 above.

**D.Connect with Notebook and Personal Computer which embedded external Bluetooth dongle**

Ex. Connect Window 7 OS

- 1.Open Control Panel
- 2.Select “Device and Printer”
- 3.Select “Add New Device, then you will find “BT -7228”, select this icon, the BT-7228 will automatically connect with your Notebook or Personal Computer.

(Please note, may you have to key-in passwords for pairing process as shown on Notebook or Personal Computer due to the Notebook or PC inside Bluetooth driver is belong to old version)


- 4.You can use BT-7228 when you connect device successfully.

**Above pairing procedures are same as Window OS Vista, XP.**

**Recharge way**

When LED2 glitter, it is mean battery low, please put USB cable into BT-7228 and Notebook(or PC) USB port or put AC to DC USB adapter(DC5V / 0.1A) for charge, it will spend around 2~3 hours for fully charged.

## Hotkey functions definition:

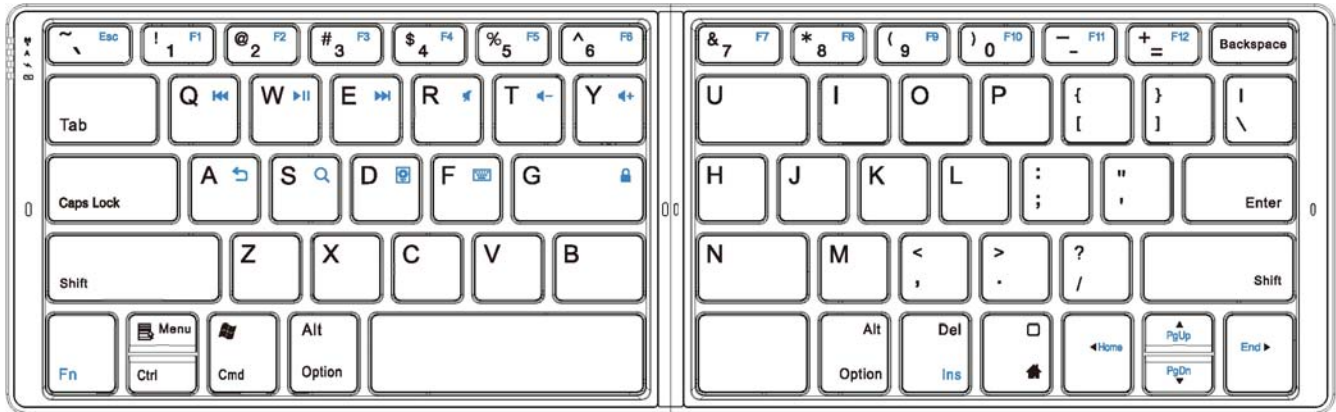

Fn+""→Esc

Fn+"1"→F1

Fn+"2"→F2

Fn+"3"→F3

Fn+"4"→F4

Fn+"5"→F5

Fn+"6"→F6

Fn+"7"→F7

Fn+"8"→F8

Fn+"9"→F9

Fn+"0"→F10

Fn+"-"→F11

Fn+"="→F12

Fn+"Q"→ Previous/

Fn+"W"→ Pause/Play

Fn+"E"→ Next

Fn+"R"→ Mute

Fn+"T"→Volume down

Fn+"Y"→Volume up

Fn+"A"→Return(under Android)

Fn+"S"→ iPhone or iPad Search

Fn+"D"→ iOS Slider show/iOS

**(this function only for iPad or iPhone 5.0 OS backward/此功能只有在 iPad 適用)**

Fn+"F"→ iOS Keyboard

Fn+"G"→iPhone or iPad key locked/iPhone or iPad

Fn→Function key

Fn+"Del"→Ins


Fn+"Arrow (Up)"→PgUp

Fn+"Arrow(Down)"→ PgDn

Fn+"Arrow(Right)"→End

Fn+”Arrow(Left)”→Home

\*Japanese version

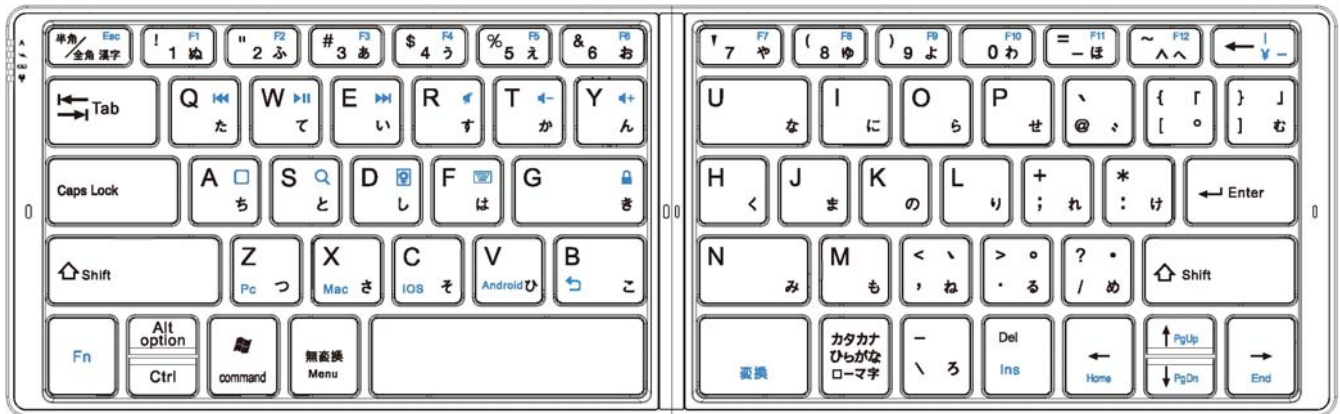

Except above hotkey, Japan version are including some below hotkeys function

Fn+”Backspace,←” →Japanese dollars sign

Fn+”Z”→Pc mode(for Window OS typing)

Fn+”X”→Mac mode(for Mac OS typing)

Fn+”C”→iOS mode

(Support "Roman Alphabet" directly input in iPad or iPhone Japanese version)

Fn+”V”→Android typing mode

(Support normal typing under Andorid OS, like english input method and Menu key typing)

Fn+”B”→Return key(only can use in Android OS)

Fn+”Right Spacebar”→變換

Note:

Under iOS, the language input method switching can be used;

Please press Window key(command key) then press Spacebar key together for change different language of input method.

## **Troubleshooting**

### **Q1 : You can't pairing BT-7228**

1 : Due to power saving design concern, if you didn't touch ID button key over pass 30 minutes , please re-open On/Off switch again then you just press ID button for pairing.

2.Or within 30 minutes you can try to press ID pairing button, you can pairing between iDevice and BT-7228.

3.Please make sure batter power is fully enough for workin g, you can ch eck LED4 if glitter, if so, please recharge battery power immediately.

### **Q2 : BT-7228 connect with iDevice successfully but it is still not working:**

1.Please m ake su re Lith ium-Ion b attery pow er is fu lly en ough for wo rking, you can ch eck LED4 if glitter, if so, please recharge battery power.

2.Please make sure that does BT-7228 work on metal surface, if so, please move out metal surface for operate.

### **Q3 : How to change input methods of language when you typing**

3.1 Under iOS (iPad, iPhone), you can press windows key (command key) then press Spacebar key for switching different language of input method.

3.2 Under Android OS, you can **try to** press shift key then press spacebar key for switching different input method.

(Due to Android OS is belong to open system, may something mobile or Tablet can't use "Shift+Spacebar" to switch this function)

4. If you still can smoothly troubleshooting the problem, please reach Lexking customer service people as below information or return BT-7128 back to purchased shop by keep original package.

[services@lexking.com](mailto:services@lexking.com)

[www.lexking.com](http://www.lexking.com)

### **Product Guarantee and Announcement**

1. 1 year guarantee during normal used.

2. Abnormal use are not including guarantee.

3. Please make sure you take your magnet card (like traditional credit card) away from BT-7228 avoiding the magnet of card lose functions, in other words, please don't directly put magnets card and BT-7228 together.

### **FCC Notice:**

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.