



KM501 User Guide

LG ELECTRONICS INC.

C E 0168


www.lgmobile.com

MMBB0275213(1.0) W

KM501

ENGLISH

Bluetooth QD ID B013379

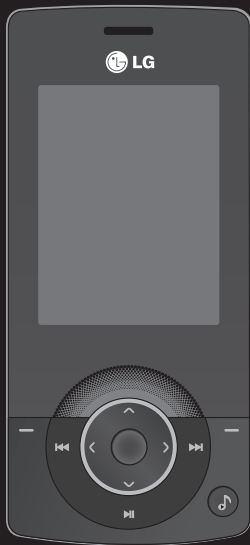

Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.

KM501 User Guide

Congratulations on your purchase of the advanced and compact KM501 phone by LG, designed to operate with the latest digital mobile communication technology.

SET UP	01
YOUR STANDBY SCREEN	02
THE BASICS	03
GET CREATIVE	04
GET ORGANISED	05
THE WEB	06
SETTINGS	07
ACCESSORIES	08

Contents

01 SET UP

Getting to know your phone	8
Installing the SIM and battery	10
Memory card	12
Menu map	13

02 YOUR STANDBY SCREEN

The status bar	14
----------------------	----

03 THE BASICS

Calls	16
Making a call.....	16
Making a call from your contacts	16
Answering and rejecting a call.....	16
In-call options.....	17
Adjusting the call volume	17
Speed dialling.....	18
Viewing your call logs	18
Using call divert.....	19
Using call barring.....	19
Changing the call settings	20

Contacts	21
Searching for a contact.....	21
Adding a new contact	21
Contact options	21
Adding a contact to a group	22
Renaming a group	22
Adding a picture to a contact.....	23
Copying your contacts to your SIM.....	23
Deleting all your contacts	23
Viewing information	23
Messaging	24
Messaging	24
Sending a message	24
Entering text.....	24
Message folders.....	25
Managing your messages	25
Using templates.....	26
Changing your text message settings....	26
Changing your multimedia message settings.....	27
Changing your other settings.....	27

04 GET CREATIVE

Camera	28	Watching a video.....	35
Taking a quick photo.....	28	Using options while video is paused.....	36
After you've taken your photo.....	28	Sending a video clip.....	36
Using your toolbar options.....	28	Using the video options menu.....	36
Changing the image size.....	29	Others.....	36
Viewing your saved photos.....	29	Games and Apps.....	37
Using zoom when viewing a photo.....	30	Playing a game.....	37
Setting a photo as wallpaper or Picture ID.....	30	Using the games options menu.....	37
Video camera	31	External memory.....	37
Shooting a quick video.....	31	Using your phone as a Mass storage device.....	37
After you've shot your video.....	31	Transferring a file to your phone.....	38
Using your toolbar options.....	31	Multimedia	39
Watching your saved videos.....	32	Music.....	39
Adjusting the volume when viewing a video.....	32	Transferring music onto your phone.....	39
My stuff	33	Playing a song.....	39
Images.....	33	Using options while playing music.....	40
Images options menu.....	33	Creating a playlist.....	40
Sending a photo.....	34	Playing a playlist.....	40
Organising your images.....	34	Editing a playlist.....	41
Deleting an image.....	34	Deleting a playlist.....	41
Deleting multiple images.....	34	Using the radio.....	42
Creating a slide show.....	35	Searching for stations.....	42
Sounds.....	35	Resetting channels.....	43
Using a sound.....	35	Listening to the radio.....	43
Videos.....	35	Voice recorder.....	43
		Sending a voice recording.....	43

Contents

05 GET ORGANISED

Organiser/Tools.....	44
Adding an event to your calendar.....	44
Editing a calendar event.....	44
Sharing a calendar event.....	45
Adding a memo.....	45
Adding an event to your To do list.....	45
Setting your alarm.....	45
Using your calculator.....	46
Using Tip calculator.....	46
Using the stopwatch.....	46
Converting a unit.....	46
Adding a city to your world clock.....	47

06 THE WEB

The web.....	48
Accessing the web.....	48
Adding and accessing bookmarks.....	48
Saving a page.....	49
Accessing a saved page.....	49
Viewing your browser history.....	49
Changing the web browser settings.....	49

07 SETTINGS

Settings.....	50
Personalising your profiles.....	50
Changing your screen settings.....	50
Changing your phone settings.....	51
Changing your connectivity settings.....	51
Sending and receiving your files using Bluetooth.....	52
Pairing with another Bluetooth device.....	53
Using a Bluetooth headset.....	53
Changing your security settings.....	54

08 ACCESSORIES

Accessories.....	55
Network service.....	56
Technical data.....	56
General.....	56
Ambient Temperatures.....	56
Guidelines for safe and efficient use.....	58

Getting to know your phone

End/Power key

Ends or rejects a call.
Turns the phone on/off.
Press once to return to the standby screen.


Clear key

Deletes a character with each press. Use this key to go back to the previous screen.

Main screen

Call key

Dials a phone number and answers incoming calls.

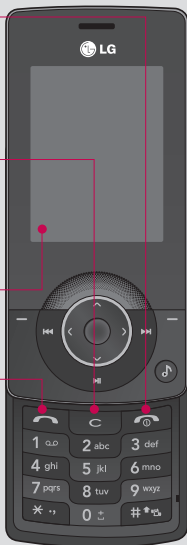

Charger, Cable, Handsfree connector


Volume



Capture button



Headset connector

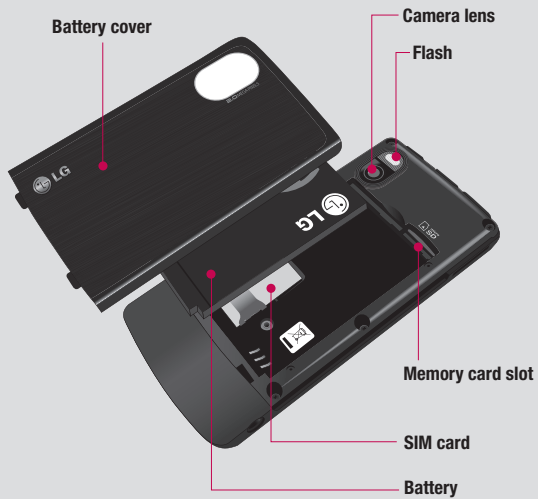

01

02

03

04

05

06

07

08

Installing the SIM and battery




1 Remove the battery cover

Press and hold down the battery release button at the top of the phone and pull off the battery cover.

WARNING: Do not use your fingernail when removing the battery

WARNING: Do not remove the battery when the phone is switched on, as this may damage the phone.



2 Remove the battery

Lever the top edge of the battery and remove it carefully from the battery compartment.



5 Replace the battery cover

Insert the bottom of the battery cover into the edge of the battery compartment and push it until it clicks into place.




3 Install the SIM card

Slide the SIM card into the SIM card holder. Make sure that the gold color contact area on the card is facing downwards. To remove the SIM card, pull it gently in the reverse direction.



4 Install the battery

Insert the bottom of the battery first into the bottom edge of the battery compartment. Ensure the battery contacts align with the terminals on the phone. Press down the top of the battery until it clips into place.



6 Charging your phone

Slide back the cover of the charger socket on the side of your KM501. Insert the charger and plug into a mains electricity socket. Your KM501 will need to be charged until a message reading Fully Charged appears on screen.

01

02

03

04

05

06

07

08

Memory card

Installing a memory card

You can expand the memory space available on your phone using a memory card. The KM501 will support a memory card of up to 2 GB.




- 1 Remove the battery cover and battery as shown on pages 10-11.
- 2 Slide the memory card into the slot at the top, until it clicks into place. Make sure that the gold color contact area is facing upwards.



- 3 Replace the battery cover as shown.

Transferring your contacts

To transfer your contacts from your SIM to your phone:

- 1 From the standby screen press the  or , and choose .
- 2 Select **Copy all**.
- 3 Choose **SIM to Phone** then **Keep original** or **Delete original**.
- 4 Select **OK** to confirm.

Menu map



GAMES & APPS

- 1 Games
- 2 Applications
- 3 Network Profiles



CALL HISTORY

- 1 All calls
- 2 Missed calls
- 3 Dialed calls
- 4 Received calls
- 5 Call duration
- 6 Call costs
- 7 Data information



ORGANISER

- 1 Calendar
- 2 Memo
- 3 To do



MULTIMEDIA

- 1 Camera
- 2 Video camera
- 3 FM radio
- 4 Voice recorder



MESSAGING

- 1 New message
- 2 Inbox
- 3 Email box
- 4 Bluetooth box
- 5 Drafts
- 6 Outbox
- 7 Sent
- 8 Listen to voicemail
- 9 Info messages
- 0 Templates
- * Settings



MY STUFF

- 1 Images
- 2 Sounds
- 3 Videos
- 4 Others
- 5 Games & Apps



PROFILES

- 1 General
- 2 Silent
- 3 Vibrate only
- 4 Outdoor
- 5 Headset



CONTACTS

- 1 Search
- 2 New contact
- 3 Speed dials
- 4 Groups
- 5 Copy all
- 6 Delete all
- 7 Settings
- 8 Information



TOOLS

- 1 Alarm clock
- 2 Calculator
- 3 Tip calculator
- 4 Stopwatch
- 5 Unit converter
- 6 World clock
- 7 SIM Services*

* This feature is operator dependent. If your operator supports SIM Tool Kit then this menu will appear.



BROWSER

- 1 Home
- 2 Bookmarks
- 3 Go to URL
- 4 History
- 5 Saved Pages
- 6 Settings
- 7 Information



MP3 PLAYER

- 1 Now playing*
- 2 All songs
- 3 My playlist
- 4 Artists
- 5 Albums
- 6 Genres
- 7 Shuffle all songs

* Only appears when music is playing.



SETTINGS

- 1 Date & Time
- 2 Languages
- 3 Display
- 4 Connectivity
- 5 Calling
- 6 Security
- 7 Flight mode
- 8 Power save
- 9 Reset
- 0 Memory status

01

02

03

04

05

06

07

08

Set up










13












Your standby screen

The status bar

The status bar uses various icons to indicate things like signal strength, new messages and battery life, as well as telling you whether your Bluetooth is active.

Below is a table explaining the meaning of icons you are likely to see in the status bar.

Icon	Description
	Network signal strength (number of bars will vary)
	No network signal
	Remaining battery life
	Battery empty
	New text message
	New voice message
	Message inbox is full
	New text+voice message
	An alarm is set

Icon	Description
	Vibrate profile in use
	General profile in use
	Outdoor profile in use
	Silent profile in use
	Headset profile in use
	Calls are diverted
	GPRS available
	EDGE available
	Roaming
	Flight mode is selected
	Bluetooth

01

02

03

04

05



06

07

08





Calls

Making a call


- 1 Key in the number using the keypad.
To delete a digit press **C**.
- 2 Press the  key to initiate the call.
- 3 To end the call, press the  key.

TIP! Enter + when making an international call, press and hold **0**.


Making a call from your contacts




- 1 Press the  key to open the address book.
- 2 Using the keypad to enter the first letter of the contact you want to call. For example for Office, press **6** three times.
- 3 To scroll through the contacts and their different numbers use  and .
- 4 Press the  key to initiate the call.

Answering and rejecting a call

When your phone rings press the  key to answer the call.

While your phone is ringing, select Silent to mute the ringing. This is great if you've forgotten to change your profile to Silent for a meeting.

Press the  key to reject the incoming call.

TIP! You can change the settings on your phone to answer your calls in different ways. Press the  or  and , select  and choose **Calling**.
Select **Answer mode** and choose from **Slide open, Any key** or **Send key only**.

In-call options



Adjusting the call volume

To adjust the volume during a call, press the volume keys on the right-hand side of your phone.

Options - Choose from a list of further in-call options, including **Contacts** and **Messaging** so you can check your messages and add contacts during a call.

01

02

03

04

05

06









07


08

Calls

Speed dialling

You can assign a speed dial number to a contact you call frequently.

- 1 Press  or  and select .
- 2 Select **Speed dials**.
- 3 Your voicemail is set to speed dial 1. You cannot change this. Select any other number either by using the  and  keys, and pressing the  to select **Assign**, or by pressing the hard key number.
- 4 Your address book will open. Select the contact you would like to assign to that number using the  and  keys, then select **OK**.

To call a speed dial number, press and hold the assigned number until the contact appears on screen. The call will initiate automatically; there's no need to press .

Viewing your call logs

Press  or  and select  to view:

All calls - View the complete list of all your dialled, received and missed calls.

Missed calls - View the list of any calls you have missed.

Dialled calls - View the list of all the numbers you have called.



Received calls - View the list of all the numbers that have called you.

Call duration - View details of how long you have spent on your calls.




Call costs - View the charges applied to your dialled numbers and the call duration of all your received and dialled calls. This service is network dependent, some operators are unable to support this.

Data information - View the amount of all your received and sent data in kilobytes.

TIP! From any call log select Options and choose Delete to delete selected or all the recorded items.

TIP! Using  and , highlight any single call entry to view the date and time of the call. To view the call duration select Options and choose **View**.

Using call divert

- 1 Press  or , select  and choose **Calling**.
- 2 Select **Call divert**.
- 3 Choose whether to divert all calls, when the line is busy, when there is no reply or when you are out of reach.
- 4 Choose **Activate** and select whether to divert to voicemail, another number or your favourite number.
- 5 Enter your divert number or select **Contacts** to browse for your divert number.

Note: Charges are incurred for diverting calls. Please contact your network provider for details.

TIP! To turn off all call diverts, choose **Cancel all** from the **Call divert** menu.

Using call barring

- 1 Press  or , select  and choose **Security**.
- 2 Select **Call Barring**.
- 3 Choose any or all of the seven options:
 - All outgoing**
 - Outgoing international**
 - O/G international except home country**
 - All incoming**
 - Incoming when abroad**
 - Cancel all barrings**
 - Change password**
- 4 Select **Activate** and enter the call barring password. Please check with your network operator for this service.

TIP! Select **Fixed dial number** from the **Security** menu to turn on and compile a list of numbers which can be called from your phone. You'll need your PIN2 code from your operator. When activated, only numbers included in the fixed dial list can be called from your phone.

01

02

03

04

05




06

07

08




Calls

Changing the call settings




- 1 Press  or , select  and choose **Calling**.
- 2 From here you can amend the settings for:
 - Call divert** – Choose whether to divert your calls.
 - Answer mode** – Choose whether to answer the phone using the accept key, any key or by sliding your handset open.
 - Send my number** – Choose whether your number will be displayed when you call someone.
 - Call waiting** – Be alerted when you have a call waiting.
 - Minute minder** – Select **On** to hear a tone every minute during a call.
 - Auto redial** – Choose **On** or **Off**.
 - Closed User Group** – Choose Default, On or OFF
 - Send DTMF tones** – Choose **On** or **Off**.

Contacts




Searching for a contact

Press  or , select  and choose **Search**.

Or, using the slightly quicker method...

- 1 Press  from the standby screen.
- 2 Enter the first letter of the contact you want to call.
- 3 To scroll through the contacts and their different numbers use  and .

Adding a new contact

- 1 Press  or , select  and choose **New Contact**.
- 2 Choose whether to store your new contact on your **Phone** or **SIM** card.
- 3 Enter all the information you have in the fields provided and select **Save**.


Or, using the slightly quicker method...

- 1 Enter the number you wish to store from the standby screen and select **Options** and choose **Save, Set number type**.
- 2 Enter the relevant information as above and select **Save**.

Note: When you are storing a contact's email address, press  to enter a symbol and scroll with  and  until you see @.

Contact options


There are many things you can do when viewing a contact. Here's how to access and use the options menu:

- 1 Open the contact you'd like to use. See **Searching for a contact** above.
- 2 Press  to open the list of options.

From here you can:

Edit - Change any of the contact's details.

Send via - Send the contact's details to another person as a business card. Choose to send as a **Text message**, **Multimedia message**, via **Bluetooth** or by **Email**.

Delete - Delete the contact. Select OK or press  if you are sure.

New contact - Add a new contact.

Copy to SIM/Phone - Choose to move or copy to the SIM card or phone (depending on where you originally saved the contact).

01

02

03

04

05

06





07

08

Contacts

Adding a contact to a group




You can collect your contacts into groups, for example, keeping your work colleagues and family separate. There are a number of groups including **Friends**, **Colleagues** and **VIP** already set up on the phone.

- 1 Press  or , select  and choose **Groups**.
- 2 Scroll to the group you wish to add a contact to and select **Add member**.
- 3 Your contacts will open. Scroll to any contacts you would like to add to the group and select **Options** and **Mark all** (or just press ) , then **Done**.

TIP! You can assign a ringtone or icon to a group. Select the group you wish to assign the ringtone or icon to and select **Options** and choose an item you want.

Renaming a group

You can rename any of the groups to fit your lifestyle.

- 1 Press  or , select  and choose **Groups**.
- 2 Highlight the one you want to rename.
- 3 Choose **Options**, select **Rename** and enter your new group name.
- 4 Select **Save**.

Note: You can only assign a contact to a group or add a picture to a contact that is saved on your Phone (not SIM) memory.

Adding a picture to a contact

You can change the appearance of your contacts in your address book to include a picture.

- 1 Press or , select and choose **Settings**.
- 2 Select **View Options** and choose **With picture**.
- 3 Then return to the address book and select the contact you want to add a photo to.
- 4 Choose Options and select **Edit**.
- 5 Scroll down to the **Picture** section. Choose Options and select **New Picture**. Your camera viewfinder will open, so you can take a picture of your contact. Alternatively you can select a picture from the **Image** file.

Copying your contacts to your SIM

You can also choose to copy your contacts from your SIM to your handset or from your handset to your SIM.

- 1 Press or , select and choose **Copy All**.
- 2 Select to copy the contacts from **SIM to phone** or **Phone to SIM**.
- 3 Choose whether to keep the original records or delete them.

Deleting all your contacts

- 1 Press or , select and choose **Delete all**.
- 2 Select to delete contacts from **SIM** or **Phone**.
- 3 Select **OK** if you are sure.

Viewing information




Press or , select and choose **Information**.

From here you can view **Service dial numbers**, your **Own number** and your **My business card**.

TIP! If you haven't yet created a business card, the **My business card** screen will give you the option to create one. Select **New** and enter your details as you would for any contact. Choose **Save**.





Messaging


Messaging

Your KM501 combines Text messages, Multimedia messages, Bluetooth messages and Email into one intuitive and easy to use menu. Simply Press  or  and select .

Sending a message


The quick way to begin sending a Text message is to press  from the standby screen and go straight to step 4 below. Otherwise:

- 1 Press  or , select  and then **New message**.
- 2 Choose to send **Text, Multimedia** or **Bluetooth**.
- 3 A new message will open.
- 4 Enter your message using T9 predictive mode or Abc manual mode.
See **Entering text** to see how to switch between the different text entry modes.
- 5 Select Options and choose **Insert** to add a symbol, image, animation, sound, text template, contact or business card.
- 6 Select Options and choose **Send to** or just press .

- 7 Enter the phone number or select Options and choose **Contacts** to open your contacts list.
You can add multiple contacts.
- 8 Select Options and choose **Send** or just press .

Entering text

There are two ways to enter text: T9 predictive and Abc manual.

To turn on T9 predictive text, begin a new message, choose Options, select **T9 languages** and choose **T9 on**. With T9 on, you can switch between T9 predictive, Abc manual and numbers by pressing .


T9 predictive

T9 mode uses a built-in dictionary to recognise words you are rewriting based on the key sequences you press. Simply press the number key associated with the letter you want to enter, and the dictionary will recognise the word as you type. For example, press 8, 3, 5, 3, 7, 4, 6, 6, 3 to write 'telephone'.


If the word you want doesn't appear, choose Options and select **New T9 word**. Enter the word using Abc manual mode and your word or name will be added to the dictionary.

Abc manual

In Abc mode you must press the key repeatedly to enter a letter. For example, to write 'hello', press 4 twice, 3 twice, 5 three times, 5 three times again, then 6 three times.

 **WARNING:** You will be charged per 160 character text message for each person that you send the message to.

Message folders

Press  or , select . You'll recognise the folder structure used on your KM501, it's fairly self-explanatory.

Inbox - All the messages you receive are placed into your inbox. From here you can reply, forward and more, see below for details.

Email box - Contains all your email messages.

Bluetooth box - The Bluetooth box folder contains your Bluetooth message folders.

Drafts - If you don't have time to finish writing a message, you can save what you have done so far here.

Outbox - This is a temporary storage folder while messages are being sent.

Sent - All the messages you send are placed into your Sent folder.




Info messages - View all the info messages and updates received from your operator.

Templates - A list of useful messages, already written for a quick reply.

You can also access your voicemail from here by selecting **Listen voicemail** and your messaging settings by selecting **Settings**.

Managing your messages

You can use your Inbox to manage your messages.

- 1 Press  or , select  and then **Inbox**.
- 2 Select Options and then choose to:

View - View a selected message.

Delete - Delete a selected message.

Reply - Send a reply to the selected message.

Forward - Send the selected message on to another person.

Return call - Call the person who sent you the message.

Save number - Save as a new or existing contact.

Information - View the details of a message, for example, the time it was sent.

Multi Delete - Delete selected messages.

Delete all read - All opened messages will be deleted.

Delete all - You can select whether to delete all of each message type.

01

02

03

04

05

06

07

08





Messaging

If you see the message **No space for SIM message** you should delete some messages from your inbox which are saved in your SIM Card.

If you see the message **No space for messages** you can delete messages to create space.

Using templates




You can create templates for the Text and Multimedia messages you send most frequently. There are some templates already on your phone, which you can edit if you wish.

- 1 Press  or , select  and then **Templates**.
- 2 Choose **Text templates** or **Multimedia templates**. You can then select Options and choose **Edit** to change existing templates or select Options to add **New template** or **Delete** templates.
- 3 To send a template, select the one you want to send, choose Options and select **Send via**.
- 4 Choose how you'd like to send the template; as a Text, Multimedia, Bluetooth or Email message.
- 5 Select a contact and choose Options, **Send** (or just press ).

Changing your text message settings

Your KM501 message settings are pre-defined so that you can send messages immediately.

If you'd like to change the settings, see below for more information.

Press  or , select , then choose **Settings** and **Text message**. You can make changes to:

Message types - Convert your text into Voice, Fax, Paging, X.400, Email or ERMES.

Validity period - Choose how long your message is stored at the message centre.

Delivery report - Choose to receive confirmation that your message was delivered.

Reply charging - Choose to be billed for your message recipient's reply.

Message centre number - Enter the details for your message centre.

Character encoding - Choose how your characters are encoded. This impacts the size of your message and therefore data charges.

Bearer setting - Choose whether to send your messages via GSM or GPRS.

Changing your multimedia message settings

Your KM501 message settings are pre-defined so that you can send messages immediately.

If you'd like to change the settings, see below for more information.

Press  or , select , then choose **Settings** and **Multimedia message**.

You can make changes to:

Subject- Include a subject field in your multimedia messages.

Slide duration - Choose how long your slides appear on screen.

Delivery time - Choose how long before each message is sent.

Priority - Choose the priority level of your multimedia message.

Validity period - Choose how long your message is stored at the message centre.

Delivery report - Choose to allow and/or request a delivery report.

Read report - Choose to allow and/or send a read report.

Auto download - Choose to automatically or manually download multimedia messages, depending on whether you are at home or roaming.

Network Profiles - Select a operator specific network profile for sending multimedia messages.

Permitted message Types - Select which type of senders to allow multimedia messages from.

Changing your other settings

Press  or , select , choose **Settings** then:

Email - Set your email account, choose your access point and retrieve interval, and add a signature.

Voicemail number - Your voicemail number is stored here. Contact your network operator for more information on the service they provide.

Push message - Here you can switch off Push message, which means your messages will no longer be pushed directly to your device as they are received, only when you check for new messages.

Info messages - Change the settings for the info messages and updates received from your operator.

01

02

03

04

05




06

07

08

Camera

Taking a quick photo



- 1 Press and hold down the  key on the right hand side of the handset and the camera's viewfinder will appear on screen.
- 2 Holding the phone horizontally, point the lens towards the subject of the photo.
- 3 Press  or the  key on the right side of the handset to take a photo.

After you've taken your photo

Your captured photo will appear on screen. The name of the image runs along the bottom of the screen.


Select Options to open a sub menu where you can choose to take a New Photo, set your image as **Wallpaper** or **Picture ID**, look at the other photos in your Album, or send the photo as a Multimedia message, Bluetooth or email. To exit the Camera, press and hold **C**.

Using your toolbar options

Selecting Options will display a new toolbar across the bottom of the viewfinder screen. Use  and  to navigate through the toolbar options.





 **Resolution** – See Changing the image size on page 29.


 **Quality** - Choose between **Normal**, **Fine** and **Super fine**. The finer the quality the sharper a photo will be but the file size will increase as a result. You'll be able to store fewer larger photo files in your memory.


 **Flash** – Turn the flash **On** or **Off**.


The flash is set to **Off** as default, saving battery power. Whenever you exit the camera it will return to the default Off setting.

 **Self timer** - The delay-timer allows you to set a delay after the capture button is pressed. Choose from **Off**, **3 seconds**, **5 seconds** or **10 seconds**. Great for that group photo you want to be part of.

 **Multi shot** - This enables you to take up to nine shots automatically in very quick succession. Great for taking photos of moving objects or at sporting events.

 **Colour effect** – Choose from four colour tone options: **Off** (normal/colour), **Sepia**, **Mono** (black and white) or **Negative**.


 **White balance** - The white balance ensures that any white in your photo is realistic. In order for your camera to correctly adjust the white balance you may need to determine the light conditions. Choose from **Auto**, **Daylight**, **Incandescent**, **Cloudy** or **Fluorescent**.

 **Shutter tone** - Select one of the three shutter sounds or switch the sound off.





 **Reset settings** – Choose **Yes** to reset your phone to its original camera settings.

Changing the image size

You can change the size of the photo to save memory space. The more pixels, the larger the file size, which in turn means they take up more of your memory. If you want to fit more pictures on your phone, you can alter the pixel number to make the file size smaller.

- 1 Choose Options and select  from the toolbar.
- 2 Select a pixel value from the four numerical options (QV: 320X240, V: 640X480, 1M: 1280X960, 2M: 1600X1200).
- 3 Select the size you would like to use and choose **OK**.

Viewing your saved photos

- 1 You can access your saved photos from within the camera mode and from the standby screen. From the viewfinder, simply select **Album**. From the standby screen you should press  or , then select  and **Images**.
- 2 Your gallery will appear on screen.
- 3 Use the arrows to select the photo you want to view and choose Options, **View** or just press  to enlarge it.

01

02

03

04

05

06

07



08

Camera

Using zoom when viewing a photo

Use the arrow keys to move the focus area and zoom in and out.






Setting a photo as wallpaper or Picture ID

You can set the image to appear at certain times. From your image gallery, use  and  to select an image and choose Options, **Set as** to use the selected image as wallpaper or Picture ID for one of your contacts.

Note: Picture ID can only be added to contacts saved to your phone, not your SIM.

Video camera

Shooting a quick video

- 1 Press the  or  and select , then Video camera.
- 2 Point the camera lens towards the subject of the video.
- 3 Press  once or press the  key on the right side of the handset to start recording.
- 4 **REC** will appear in the bottom left corner of the viewfinder and a timer will show the length of your video.
- 5 To pause the video choose **Pause** and resume by selecting **Resume**.
- 6 Select **Stop** to stop recording.

After you've shot your video


A still image representing your captured video will appear on screen. The name of the image runs along the bottom the screen.


Select Options to open a sub menu where you can choose to take a New video, play the video, or Send the video via Multimedia message, Bluetooth or Email, or look at the other videos in your Album.


Using your toolbar options


Selecting Options will display a new toolbar across the bottom of the viewfinder screen. Use the arrow keys to navigate the toolbar options.



 **Video mode** – To shoot a video you want to send in a multimedia message, select MMS.

 **Resolution** – If you want to fit more videos onto your phone you can alter the pixel number to make the file size smaller. Choose between two options for your video, 320 x 240 or 176 x 144.

 **Quality** - Choose between **Fine**, **Normal** and **Super Fine**. The finer the quality the sharper a video will be, but the file size will increase as a result. You'll be able to store fewer larger video files in the phone's memory.

 **Flash** – Turn the flash **On** or **Off**. The flash is set to **Off** as default, saving battery power.

01

02

03

04


05


06

07

08

Video camera







 **Colour effect** - Choose an Image effect to apply to the video you're taking. Choose from four colour tone options: **Off** (normal/colour), **Sepia**, **Mono** (black and white) or **Negative**.

 **White balance** - The white balance ensures that any white in your video is realistic. In order for your camera to correctly adjust the white balance you may need to determine the light conditions. Choose from **Auto**, **Daylight**, **Incandescent**, **Cloudy** or **Fluorescent**.

 **Reset settings** – Choose **Yes** to reset your phone to its original video camera settings.

TIP! The settings menu is superimposed over the viewfinder. When you change elements of the image colour or quality, you'll be able to see the image change in preview behind the settings menu.

Watching your saved videos




- 1 You can access your saved videos either from within video camera mode or from the standby screen. From the viewfinder, simply select **Album**. From the standby screen you should press  or , then select  and **Videos**.
- 2 Your gallery will appear on screen.
- 3 Use the  and  to select the video you want to view and choose Options, **Play** or just press  to watch it.

Adjusting the volume when viewing a video

To adjust the volume of the audio on a video whilst it is playing, use the keys on the right side of the handset.

My stuff

You can store any multimedia files on your phone's memory so that you have easy access to all of your pictures, sounds, videos and games. You can also save your files to a memory card. The advantage of using a memory card is that you can free up space on your phone's memory.

All your multimedia files will be saved in My stuff. To access My stuff, press  or  then  to open a list of folders storing all of your multimedia files.

Images

Images contains a folder of default images pre-loaded onto your phone, images downloaded by you and images taken on your phone's camera.

Images options menu

The options which are available to you in **Images** depend on what type of image you have selected. All of the options will be available for pictures you have taken on the phone's camera. Only the **View**, **Set as**, **File info**, **Slide show**, **Sort by** and **Thumbnail / List view** options are available for default images.

In the **Images** folder, select Options to bring up your list of options.

View - View the selected image.

Delete - Delete the selected image.

Send via - Send the selected image to a friend via MMS, Bluetooth or Email.

Note: The image may need to be resized before it can be sent by MMS.

Set as - Set selected image as your wallpaper or as a picture ID.

File - Edit image, rename or view the information (Name, Size, Date, Image size and Copyright) of the selected image. If you have an external memory card inserted, two additional options will show: **Move to external memory** and **Copy to external memory**.

Print via Bluetooth - Print an image file via Bluetooth.

Slide show - See Creating a slide show on page 35.

New folder - Create a new folder within the main Images folder.

Multi delete - Select more than one image to be deleted.

Delete all - Delete all the photos in your Images folder.

Sort by - Arrange your images by Date, Type or Name.

List view / Thumbnail view - Change the way you view your photos.

01

02

03

04

05




06

07




08

My stuff




Sending a photo

- 1 Press  or  then select .
- 2 Scroll to and select **Images**.
- 3 Select a photo and choose Options.
- 4 Select **Send via** and choose from **Multimedia message, Bluetooth** or **Email**.
- 5 If you choose **Multimedia message** or **Email**, your photo will be attached to the message and you can write and send the message as normal. If you choose Bluetooth, you will be prompted to turn Bluetooth on and your phone will search for a device to send the picture to.






Organising your images

- 1 Press  or  then select .
- 2 Scroll to and select **Images**.
- 3 Select Options then **Sort by**.
- 4 Choose from **Date, Type** or **Name**.

Deleting an image




- 1 Press  or  then select .
- 2 Scroll to and select **Images**.
- 3 Select an image and choose Options.
- 4 Select **Delete**.

Deleting multiple images

- 1 Press  or  then select .
- 2 Scroll to and select **Images**.
- 3 Choose Options and select **Multi delete**.
- 4 A box will appear next to each image. Select the image and select Options, **Mark all** or just press  to mark it. To unmark an image, select Options, **Unmark all** or just press  so that the tick disappears from the box.
- 5 Once you have marked all of the appropriate boxes, select **Done** and confirm you want to delete all of the marked images.

Creating a slide show

If you want to look at all of the images on your phone or scan through what you've got, you can create a slide show to save you from having to open and close each individual image.

- 1 Press  or  then select .
- 2 Scroll to and select **Images**.
- 3 Select the photo you would like to begin the slideshow and choose Options.
- 4 Select **Slide show** and it will begin.
- 5 Select Options, **Pause** to pause the slide show and **Stop** to end the slide show and return to the Images folder.





Selecting Options during the slide show presents further choices:

Repeat on/off - Decide whether you want the slide show on repeat or not.

Sounds

The **Sounds** folder contains the **Default sounds** and your voice recordings. From here you can manage, send or set sounds as ringtones.





Using a sound

- 1 Press  or  then select .
- 2 Scroll to and select **Sounds**.
- 3 Select **Default sounds** or choose from the list of voice recording files.
- 4 Select a sound and choose Options, **Play** or just press  to listen to it.
- 5 Select Options, **Set as** and choose from **Ringtone** and **Ringtone ID**.

Videos

The **Videos** folder shows the list of downloaded videos and videos you have recorded on your phone.

Watching a video

- 1 Press  or  then select .
- 2 Scroll to and select **Videos**.
- 3 Select a video and choose Options, **Play** or just press .

01

02

03

04

05

06

07

08

My stuff

Using options while video is paused

By selecting Options, the video you are playing will be in pause mode and you can choose from:

Delete - Delete the video.

Send via - Send the video in a Multimedia message, by Bluetooth or by Email.

File - Rename the video, Move the selected video to a folder, View the Information (Name, Date, Size, Playback and Copyright).

Landscape / Full mode - Change how you view your video.

Sending a video clip

- 1 Select a video by using the arrow keys.
- 2 Select Options, **Send via** and choose from **Multimedia message, Bluetooth** or **Email**.
- 3 If you choose **Multimedia Message** or **Email**, your video clip will be attached to a message and you can write and send it as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on and your phone will search for a device to send the video to.

Note: The video may need to be resized before it can be sent by MMS. Some videos may be too large to send by MMS at all, in which case choose one of the other sending options.

Using the video options menu

In the Videos folder, select Options to bring up the following list of options.

Play - watch the selected video.

Delete - Delete the selected video.

Send via - Send the video using a Multimedia message, Bluetooth or email.

File - Rename the video, or view the information (Name, Size, Date, Playback and Copyright).

New folder - Create a new folder within the main Videos folder.

Multi delete - Select more than one video clip to be deleted.

Delete all - Delete all the clips in your Video folder.

Sort by - Arrange your videos by Date, Type or Name.

List view / Thumbnail View - Change the way you view your videos.

Others





The **Others** folder is used to store files which are not pictures, sounds, videos, games or applications.

You may find that when you transfer files from your computer to your phone, they will appear in the **Others** folder.

Games and Apps

Your KM501 comes with preloaded games to keep you amused when you have time to spare. If you choose to download any additional games or applications they will be saved into this folder.

Playing a game

- 1 Press  or  then select .
- 2 Scroll to and select **Games & Apps**.
- 3 Select the game of your choice and choose Options, **Play** or just press .

Using the games options menu

In the Games folder, select Options to bring up the following list:

Play – Select this to play the game.




Information - View the Name, Version, Vendor, Data-size and Domain of the file.

External memory

If you've inserted a memory card it will be displayed as a folder within My stuff. Your external memory folder will be divided into four further folders: Images, Sounds, Videos and Others. Each folder will contain all the files of that type saved to your memory card rather than your handset.

Using your phone as a Mass storage device

Your KM501 can be used as a mass storage device, just like a USB stick. This is a great way of moving your files from your computer to your phone. In order to use the phone as mass storage device, you need to insert an external memory card. When connected to PC through USB cable only external memory card will be accessed.

- 1 Press  or , select  then **Connectivity**.
- 2 Select **USB Connection mode**.
- 3 Scroll to **Mass storage** and select **OK**.
- 4 Insert the smaller end of the USB cable into the USB cable connector on the edge of the KM501. Plug the larger end into the USB port of your computer.

01

02

03

04




05

06

07

08

My stuff

- 5 A removable disk folder will open automatically, if you have a memory card inserted, showing all the folders on your memory card.
- 6 Drag and drop your images, videos, music or others into the correct folders.
- 7 Safely remove your phone by clicking on the **Safely remove hardware** icon in your desktop toolbar.
- 8 When you want to then access a file, for example an image, press  or  then select  followed by **External memory** then **Images**. All the images you just transferred will be contained in this file.

Transferring a file to your phone

You can also transfer files from your computer to your phone using Bluetooth.




- 1 Make sure your phone and computer have Bluetooth switched on and are visible to one another.
- 2 Use your computer to send the file via Bluetooth.
- 3 When the file is sent you will have to accept it on your phone by selecting **Yes**.
- 4 The file will be saved within the appropriate folder depending on its type. For example, photographs will be saved in the **Image** folder and music in the **Sounds** folder. If your phone cannot identify the file type, the file will be saved in the **Others** folder.

Note: Files sent using Bluetooth will be saved to the phone memory.

Multimedia



Music

Your LG KM501 has a built-in MP3 player so you can play all your favourite music.

To access the MP3 player, press  or  and select . From here you have access to:

All songs - Contains all of the songs you have on your phone.

My playlist - Contains any playlists you have created as well as **On the go**. You can select specific music by each of these characteristics: **Artists, Albums, Genres** and **Shuffle all songs**.








TIP! You can access the MP3 player through the MP3 hot key  on the front. By using the  key, you can get directly to your playlist.

Transferring music onto your phone

The easiest way to transfer music onto your phone is via Bluetooth or your USB cable. To transfer using Bluetooth:

- 1 Make sure both devices have Bluetooth switched on and are visible to one another.
- 2 Select the music file on the other device and choose to send it via Bluetooth.
- 3 When the file is sent you will have to accept it on your phone by selecting **Yes**.
- 4 The file should appear in **MP3 Player > All songs**.

Playing a song

- 1 Press  or  and select .
- 2 Select **All songs** and then the song you want to play. Press .
- 3 Press  to pause the song.
- 4 Press  to skip to the next song.
- 5 Press  to skip to the previous song.
- 6 Select Options, **Minimize** to hide the music player screen so that you can continue using your phone as normal while music is playing.

01

02

03

04

05

06

07

08

Multimedia

Using options while playing music

Select Options and choose from:

Minimise

Natural sound on

Add to playlist

Listen via Bluetooth

Set as ringtone

Rating






Information

Settings - Change the **Equalizer** or **Play mode**, change the music light settings or **Set shuffle** to mix up the music.





TIP! To change the volume while listening to music, use the volume keys on the side of your phone.

Creating a playlist

You can create your own playlists by choosing a selection of songs from the **All songs** folder.




- 1 Press  or  and select .
- 2 Choose **My playlist**. External memory should be inserted to use this option.
- 3 Select **New**, enter the playlist name and choose **Save**.
- 4 The **All songs** folder will show. Select all of the songs that you would like to include in your playlist by scrolling to the ones you want and pressing ; a tick will show next to the song name. If you accidentally add a song you don't want, select it and press  again to untick it.
- 5 Select Options, **Save** to store the playlist.

Playing a playlist

- 1 Press  or  and select .
- 2 Choose **My playlist**.
- 3 Select the playlist you would like to play and choose **View**, then press .

Editing a playlist

From time to time, you may want to add new songs or delete songs from a playlist. You may also want to organise your playlists. When you want to do this, you can edit the playlist.

- 1 Press  or  and select .
- 2 Choose **My playlist**.
- 3 Scroll to the playlist you want to edit and select **View**, then choose Options.

Add – You can add songs from the playlist using this option.




Remove – Remove a song from the playlist. Select **Yes** to confirm.

Move up/Move down – Move the song up or down the list to change the playing order.

Remove all – Remove all of the songs from the playlist.

Information – View the playlist information.

Deleting a playlist

- 1 Press  or  and select .
- 2 Choose **My playlist**.
- 3 Scroll to the playlist you want to delete and choose Options.
- 4 Select **Delete** and select **Yes** to confirm.

Note:

DRM (Digital Rights Management)

As a result of the Digital Rights Management (DRM) system, some of the media items you download from the Internet or receive by MMS may have a “Purchase right” menu to access them. You can acquire the key to purchase the right from the website which owns the rights to the contents.

Music is copyright protected in international treaties and national copyright laws. It may be necessary to obtain permission or a license to reproduce or copy music. In some countries national law prohibits private copying of copyrighted material. Please check the national legislation of the applicable country concerning the use of such material.

When an MP3 is playing on the MP3 player, if you press MP3 short key, you can use BGM mode. In BGM mode MP3 can be played while other functions are being used. BGM can be stopped on the MP3 player screen.

Multimedia

Using the radio




Your LG KM501 has an FM radio feature so you can tune into your favourite stations to listen to on the move.

Note: You will need to insert your headphones in order to listen to the radio. Insert them into the headphone socket (this is the same socket that you plug your charger into).




Searching for stations

You can tune radio stations into your phone by searching for them either manually or automatically. They will then be saved to specific channel numbers so you don't have to keep re-tuning. You can save up to 12 channels in your phone.

To auto tune:

- 1 Press  or  and select .
- 2 Choose **FM radio**.
- 3 Select **Auto scan** then **Yes**.
- 4 Each time a station is found, your KM501 will ask if you want to save it. Select **Yes** if you want to store the channel and **No** if you don't. Any stations you choose to save will automatically be allocated to a channel number in your phone.




To manually tune:

- 1 Press  or  and select .
- 2 Choose **FM radio**.
- 3 Select a channel number that you want to save a station to and choose **Edit**.
- 4 To enter your station, you can either use the arrow keys to search for the frequency, or you can enter the frequency using the keypad.
- 5 Select **OK**.




Note: You can also edit the stations you have saved in a channel number by using the same **Edit** feature you use to manually tune in stations.

TIP! To improve the radio reception, extend the headset cord, which functions as the radio antenna.

Resetting channels





- 1 Press  or  and select .
- 2 Choose **FM radio**.
- 3 Select Options, **Reset channels**. Choose **Yes** to confirm the reset. Each channel will return to the starting 87.5Mhz frequency.

Listening to the radio

- 1 Press  or  and select .
- 2 Choose **FM radio**.
- 3 Select the channel number of the station you would like to listen to.

Voice recorder

Use your **voice recorder** to record voice memos or other sounds.

- 1 Press  or  and select .
- 2 Choose **Voice recorder**.
- 3 Press  to begin recording.
- 4 Select **Pause** to pause the recording.
- 5 Choose **Stop** to end the recording.
- 6 Select Options, **Play** to listen to the recording.

Note: You can listen to all of the voice recordings you have saved by selecting **Album**.




Sending a voice recording

- 1 Once you have finished recording, select Options.
- 2 Select **Send via** and choose from **Multimedia message, Bluetooth** or **Email**. If you choose **Message** or **Email**, the recording will be added to the message and you can write and send it as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on.

TIP! If you plan to send your recording as a message, before you start recording, choose Options and select **Recording mode**. Choose **MMS**. This will ensure that the recording fits into a message.

Organiser/Tools

Adding an event to your calendar







- 1 From the standby screen press  or , and select  , then **Calendar**.
- 2 Select the date you would like to add an event to. You can choose a date either by scrolling to it using arrow keys or by selecting Options and manually entering the date.

Note: Once you've already got an event saved in your calendar, you will need to select **Go to date** after selecting Options in order to enter a date to set your event to.

- 3 Select Options and choose **New schedule** and enter the time you would like your event to begin. Scroll down using the arrow keys and enter the end time of your event.
- 4 Scroll down and enter a **Subject** for the event.
- 5 Scroll down again and choose whether you would like to set an **Alarm** for the event. Scroll left or right to see the available options. You can set the alarm to go off at the starting time of the event or at a set period of time before the event starts to remind you the event is coming up.




- 6 Scroll down once more to select whether the event is a one-off or if it is to be repeated at **Daily, Weekly, Monthly** or **Yearly** intervals. If the event is repeated, you can also scroll down to enter an **Expiration date** for when the events will stop completely.
- 7 Select **Save** and your event will be saved in the calendar. A triangular cursor will mark the days that any events have been saved to.

Editing a calendar event





- 1 From the standby screen press  or , and select  , then **Calendar**.
- 2 Choose Options and select **All schedules** to see a list of all your events. Scroll to the event you would like to edit and select Options, **View** or just press  . Alternatively select the day of the event in the calendar and choose Options, **View** or just press  .
- 3 Select Options, **Edit** or just press  and scroll to the event detail you want to change. Make your modifications and select **Save** to store the edited event.

Note: You can delete an event from your calendar by selecting to view the event and then select Options, **Delete**.

Sharing a calendar event




- 1 From the standby screen press  or , and select , then **Calendar**.
- 2 Select the event you would like to share and choose Options.
- 3 Choose **Send via** and select from **Text message**, **Multimedia message**, **Bluetooth** or **Email**.

Adding a memo




- 1 From the standby screen press  or , and select , then **Memo**.
- 2 Select **New** and type your memo.
- 3 Choose Options, **Save** or just press .
- 4 Your memo will appear on screen the next time you open the **Memo** application.

Tip! You can edit an existing memo. Select the one you want to edit, select Options and select **Edit**.

Adding an event to your To do list

- 1 From the standby screen, press  or , and select , then **To do**.
- 2 Select **New** and type Due date, Note, Priority and Status of your new to do. (Using the Options, you can select the date referring to your calendar)
- 3 Choose Options, **Save**.
- 4 Your to do list will appear on screen and you can View, Add, Delete and do several things by choosing from the Options.

Setting your alarm

- 1 From the standby screen press  or , and select , then **Alarm clock**.
- 2 Select **New**.
- 3 Scroll down and enter the time you would like the alarm to sound at.
- 4 Choose whether you would like your alarm to sound **Once**, **Daily**, **Mon - Fri**, **Mon - Sat** or **Sat - Sun**.
- 5 Scroll down to choose the alarm sound. Choose Options, **Sounds** to select a new sound.
- 6 Scroll down and enter a name for the alarm or keep the suggested name.
- 7 Select **Save**.

Note: You can set up to 5 alarms.

01

02

03

04

05




06

07

08

Organiser/Tools




Using your calculator

- 1 From the standby screen press  or , and select , then **Calculator**.
- 2 Press the numeric keys to input numbers.
- 3 For simple calculations, select the function you require (+, -, ×, ÷), followed by =.
- 4 For more complex calculations, select **Function** to select a command.
- 5 Select **Clear** to clear the screen to start a new calculation.




Using Tip calculator

You can calculate the tip by using this function. The process to activate the function is same as Calculator.

Using the stopwatch

- 1 From the standby screen press  or , and select , then **Stopwatch**.
- 2 Select **Start** to begin the timer.
- 3 Choose **Lap** if want to record a lap time.
- 4 Select **Stop** to end the timer.
- 5 Choose **Resume** to restart the stopwatch at the time you stopped it at, or select **Reset** to begin the time again.

Converting a unit

- 1 From the standby screen press  or , and select , then **Unit converter**.
- 2 Choose whether you would like to convert **Currency, Area, Length, Weight, Temperature, Volume** or **Velocity**.
- 3 Scroll up to choose from the unit of measurement you want to enter. Scroll left and right to select a unit, then scroll down and enter the unit quantity.
- 4 Scroll down to the unit conversion box and choose the unit measurement you want to convert into. The conversion will show automatically in the line below.

Adding a city to your world clock

- 1 From the standby screen press  or , and select , then **World clock**.
- 2 Select Options and choose **Change time zone** and select a city.
- 3 Choose **New city** from the options to add more cities in your list.

01

02

03

04

05

06




07

08

The web

With browser at the tip of your fingers, you can get the up to date news and weather forecast as well as information on sports or traffic whenever you need it. In addition, browser allows you to download the latest music, ringtones, wallpapers and games.

Accessing the web

- 1 From the standby screen press  or , select  and choose **OK**.
- 2 To access the browser homepage directly, select **Home**. Alternately select **Go to URL** and type in your desired URL.

Note: An additional cost is incurred when connecting to this service and downloading content. Check your data charges with your network provider.

Adding and accessing bookmarks

For easy and fast access to your favourite websites, you can add bookmarks and save web pages.





- 1 From the standby screen press  or , select  and choose **OK**.
- 2 Select **Bookmarks**. A list of your Bookmarks will appear on the screen.
- 3 To add a new bookmark, select Options and choose **New bookmark**. Enter a name for your bookmark followed by the URL.
- 4 Select **Save**. Your Bookmark will now appear in the list of bookmarks.
- 5 To access the bookmark simply scroll to the required bookmark and select Options, **Connect** or just press . You will be connected to your bookmarked page.

Saving a page





- 1 Access your required web page as described above.
- 2 Choose Options and scroll to **Save**, select **This page**.
- 3 Select **OK**.

TIP! This menu will also allow you to save pages, and delete saved pages.




Accessing a saved page

- 1 From the standby screen press  or , select  and choose **OK**.
- 2 Select **Saved pages**.
- 3 Select the required page and select Options, **Connect** or just press .

Viewing your browser history

- 1 From the standby screen press  or , select  and choose **OK**.
- 2 Select **History** and choose **OK**.
- 3 A list of web page titles you have accessed recently will be displayed. To access one of these pages, scroll to the required page and select Options, **Connect** or just press .

Changing the web browser settings

- 1 From the standby screen press  or , select . Select **Settings**.
- 2 You can choose the way your mobile handles, displays and uses information when browsing the internet. You can amend settings within **Network Profiles, Rendering mode, Cache, Cookies, Security certificates, Show image, Java script** and **Memory in use**.
- 3 Once you have changed your settings, select **OK**.

01

02

03

04

05

06

07



08

Settings

Within this folder you can adapt your settings to make your KM501 personal to you.

Note: For information on call settings see page 20.

Personalising your profiles

You can quickly change your profile from the standby screen. Simply press  and select , then the profile you would like to activate. Choose from:

General




Silent

Vibrate only




Outdoor

Headset

Using the Settings menu you can personalise each profile setting.

- 1 Press  or  and select .
- 2 Choose the profile setting you want to edit and select **Personalise**.
- 3 For the **Silent** and **Vibrate only** profiles, you can adapt the vibration. For the other profiles, you can change all of the sounds and alert options available in the list, including your Call alert type, Ring tones, Ring Volume and Message alert type and so on (please refer to your handset for details).




Changing your screen settings

- 1 Press  or  and select .
- 2 Select **Display** and choose from:
 - Wallpaper** - Choose a wallpaper to appear on your screen display.
 - Clocks** - Choose a style of the clock to appear on your screen display.
 - Backlight timer** - Choose how long the backlight remains on for.
 - Brightness** - Adjust the screen brightness.
 - Home screen shortcut** - Change by selecting On/ Off if you want to display or not home screen shortcut icons on idle screen.
 - Theme** - Quickly change the whole look of your screen.
 - Menu style** - Change the menu view from Grid view to List view or vice versa.
 - Dial style** - Adjust the font style for when you are typing a phone number.
 - Standby text** - Choose to add a message to your standby screen.
 - Network name** - Choose to show or hide the network name.

Note: The longer the backlight is on for, the more battery power is used and you may need to charge your phone more often.

Changing your phone settings

Enjoy the freedom of adapting your KM501 so that it works in a way which suits you best.

Press  or  and select . Choose from the list below:

Date & time - Adjust your date and time settings or choose to auto update the time when you travel.

Language - Change the language of your KM501's display.

Display - Change your screen settings.

Connectivity - See Changing your connectivity settings for more information.

Call - See Call settings on page 20 for more information.

Security - See Changing your security settings on page 54 for more information.

Flight mode - Switch the flight mode **On** or **Off**. You will not be able to make calls, connect to the Internet, send messages or use Bluetooth when Flight mode is switched on.




Power save - Choose to set the power save option **Always on**, on for **Night only** or **Off**.

Reset - Reset all the settings to their factory definitions.

Memory status - See current status of the memories (Common, Reserved and SIM card) in your KM501.

Changing your connectivity settings

Your connectivity settings have already been set up by your network operator, so you can enjoy your new phone from the off. If you want to change any settings, use this menu.

Press  or  and select . Choose **Connectivity**. Your options are:

Bluetooth - Set up your KM501 for Bluetooth use. You can adapt your visibility to other devices or search through devices you're paired with.

Network - Your KM501 connects automatically to your preferred network. To change these settings use this menu. You can also attach GPRS and add new access points using this menu.

USB connection mode - Choose **Data service** and synchronise your KM501 using the LG PC Suite software to copy files from your phone. If you have a memory card inserted select **Mass storage** to use your phone in the same way as you would a USB stick. Connect to your computer and drag and drop files to the KM501 removable device folder. See page 37 for further details.

01

02

03

04

05

06

07




08

Settings

Sending and receiving your files using Bluetooth

Bluetooth is a great way to send and receive files as no wires are needed and connection is quick and easy. You can also connect to a Bluetooth headset to make and receive calls. Before you can start sharing files with Bluetooth, you will need to pair your device with another Bluetooth device. For information on pairing devices, see **Pairing with another Bluetooth device**.

To switch Bluetooth on:

- 1 Press  or  and select . Choose **Connectivity**, then **Bluetooth**.
- 2 Select **Bluetooth on/off** and choose **On**.
- 3 Select **Off** to switch Bluetooth off.

To send a file:




- 1 Open the file you want to send, typically this will be a photo, video or music file.
- 2 Select **Options** and choose **Send via**, then **Bluetooth**.
- 3 Select **Yes** to turn Bluetooth on if it is not already activated.
- 4 Your KM501 will automatically search for other Bluetooth enabled devices within range.
- 5 Choose the device you want to send the file to and select **Send**.
- 6 Your file will be sent.

To receive a file:

- 1 To receive files, your Bluetooth must be both **On** and **Visible**. See **Changing your Bluetooth settings** for more information.
- 2 A message will prompt you to accept the file from the sender. Select **Yes** to receive the file.

Tip! Keep an eye on the progress bar to make sure your file is sent.

Changing your Bluetooth settings:

- 1 Press  or  and select . Choose **Connectivity**, then **Bluetooth**.
- 2 Choose **Bluetooth settings** to make changes to:
My visibility - Choose whether to **Show** or **Hide** your device to others.
My name - Enter a name for your KM501.
My address - Know your Bluetooth address.

Pairing with another Bluetooth device

By pairing your KM501 and another device, you can set up a passcode protected connection. This means your pairing is more secure.

- 1 Check your Bluetooth is **On** and **Visible**. You can change your visibility in the **Bluetooth Settings** menu, by selecting **My visibility**, then **Show**.
- 2 Select **Device list** from the Bluetooth menu and choose **New**.
- 3 Your KM501 will search for devices. When the search is completed **Pair** and **Refresh** will appear on screen.
- 4 Choose the device you want to pair with, select **Pair**, enter the passcode and then choose **OK**.

- 5 Your phone will then connect to the other device, on which you should enter the same passcode.
- 6 Your passcode protected Bluetooth connection is now ready.

Using a Bluetooth headset

- 1 Check your Bluetooth is **On** and **Visible**.
- 2 Follow the instructions that came with your headset to put it in pairing mode and pair your devices.
- 3 Select **Yes** to **Connect now**. Your KM501 will automatically switch to Headset profile.

Settings

Changing your security settings

Change your security settings to keep your KM501 and the important information it holds protected.

Press  or  and select . Choose

Security then select from the list below:

PIN code request - Choose a PIN code to be requested when you turn your phone on.

Auto key lock - Choose a duration for locking the key automatically.

Phone lock - Choose a security code to lock your phone, **When powered on**, **When SIM changed** or **Immediately**.

Call Barring - Select when you would like calls to be barred.

Fixed dial number – Choose a list of numbers that can be called from your phone.

Change codes - Change your **Security code**, **PIN1 code** or **PIN2 code**.

Accessories

These accessories were supplied with your KM501.

Charger



Battery



Stereo headset



Data cable Data cable and CD

Connect and synchronise your KM501 and PC.



User Guide

Learn more about your KM501.



Note

- Always use genuine LG accessories.
- Failure to do so may invalidate your warranty.
- Accessories may vary in different regions: please check with our regional service company or agent for further information.

01

02

03

04

05

06

07

08

Network service

The wireless phone described in this guide is approved for use on the GSM 900, DCS 1800 and PCS1900 networks.

A number of features included in this guide are called Network Services. These are special services that you arrange through your wireless service provider. Before you can take advantage of any of these Network Services, you must subscribe to them through your service provider and obtain instructions for their use from your service provider.

Technical data

General

Product name : KM501

System : GSM 900 / DCS 1800 / PCS 1900

Ambient Temperatures

Max : +55°C (discharging), +45°C (charging)

Min : -10°C

Declaration of Conformity



Suppliers Details

Name

LG Electronics Inc

Address

LG Twin Towers 20, Yeouido-dong, Yeongdeungpo-gu, Seoul, Korea 150-721

Product Details

Product Name

E-GSM 900 / DCS 1800 / PCS 1900 Tri Band Terminal Equipment

Model Name

KM 500, KM 500c, KM 501

Trade Name

LG

CE 0168

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 v 1.6.1 / EN 301 489-07 v 1.3.1 / EN 301 489-17 v 1.2.1
EN 60950-1 : 2001
EN 50360/EN 50361 : 2001
EN 301 511 V9.0.2
EN 300 328 V 1.6.1

Supplementary Information

The conformity to above standards is verified by BABS.

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which the declaration relates complies with the above mentioned standards and Directives

European Standard Center
LG Electronics Logistics and Services B.V.
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 - 36 - 547 - 8640, Fax: +31 - 36 - 547 - 5784
e-mail : jacob @ lge.com

Name

Seung Hyun, Ji / Director

Issued Date

07. November, 2007

Signature of representative

Guidelines for safe and efficient use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal.

Exposure to radio frequency energy

Radio wave exposure and Specific Absorption Rate (SAR) information.

This mobile phone model KM501 has been designed to comply with applicable safety requirements for exposure to radio waves.

These requirements are based on scientific guidelines that include safety margins designed to assure the safety of all persons, regardless of age and health.

- The radio wave exposure guidelines employ a unit of measurement known as the Specific Absorption Rate, or SAR. Tests for SAR are conducted using standardised methods with the phone transmitting at its highest certified power level in all used frequency bands.
- While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the relevant guidelines for exposure to radio waves.
- The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP), is 2W/kg averaged over 10g of tissue.

- The highest SAR value for this model phone tested by DASy4 for use at the ear is 0.594 W/kg (10g) and when worn on the body is 0.799 W/kg (10g).
- SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 0.631 W/kg averaged over 1g of tissue.

WARNING

- Mobile Phones must be switched off at all times in an aircraft.
- Do not hold the phone in your hand while driving.
- Do not use your phone near petrol stations, fuel depots, chemical plants or blasting operations.
- For your safety, use ONLY specified ORIGINAL batteries and chargers.
- Do not handle the phone with wet hands while it is being charged. It may cause an electric shock and can seriously damage your phone.
- Keep the phone in a safe place out of small children's reach. It includes small parts which if detached may cause a choking hazard.

- Don't charge a handset near flammable material as the handset can become hot and create a fire hazard.
- Do not charge the phone when it is on soft furnishings.
- The phone should be charged in a well ventilated area.

CAUTION

- Switch off the phone in any area where you are required by special regulations. For example, do not use your phone in hospitals as it may affect sensitive medical equipment.
- Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls.
- Only use ORIGINAL accessories to avoid damage to your phone.
- All radio transmitters carry risks of interference with electronics in close proximity. Minor interference may affect TVs, radios, PCs, etc.
- Batteries should be disposed of in accordance with relevant legislation.
- Do not dismantle the phone or battery.

"Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous."

Product care and maintenance

WARNING!

- Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.
- Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
 - Keep away from electrical appliances such as TVs, radios, and personal computers.
 - The unit should be kept away from heat sources such as radiators or cookers.
 - Do not drop.
 - Do not subject this unit to mechanical vibration or shock.
 - The coating of the phone may be damaged if covered with wrap or vinyl wrapper.
 - Use a dry cloth to clean the exterior of the unit. (Do not use solvent such as benzene, thinner or alcohol.)

Guidelines for safe and efficient use

- Do not subject this unit to excessive smoke or dust.
- Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.
- Do not tap the screen with a sharp object as it may damage the phone.
- Do not expose the phone to liquid or moisture.
- Use the accessories like earphones cautiously. Do not touch the antenna unnecessarily.

Efficient phone operation

Electronics devices

All mobile phones may get interference, which could affect performance.

- Do not use your mobile phone near medical equipment without requesting permission. Avoid placing the phone over pacemakers, for example, in your breast pocket.
- Some hearing aids might be disturbed by mobile phones.
- Minor interference may affect TVs, radios, PCs, etc.

Road safety

Check the laws and regulations on the use of mobile phones in the areas when you drive.

- Do not use a hand-held phone while driving.
- Give full attention to driving.
- Use a hands-free kit, if available.
- Pull off the road and park before making or answering a call if driving conditions so require.
- RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.
- When your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can cause the air bag to fail or cause serious injury due to improper performance.

If you are listening to music whilst out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

Avoid damage to your hearing

Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.

Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

Potentially explosive atmospheres

- Do not use the phone at a refueling point. Do not use near fuel or chemicals.
- Do not transport or store flammable gas, liquid, or explosives in the compartment of your vehicle as your mobile phone and accessories.

In aircraft

Wireless devices can cause interference in aircraft.

- Turn your mobile phone off before boarding any aircraft.
- Do not use it on the ground without permission from the crew.

Children

Keep the phone in a safe place out of the reach of small children. It includes small parts which may cause a choking hazard if detached.

Emergency calls

Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

Guidelines for safe and efficient use

Battery information and care

- You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no effect that could compromise the battery's performance.
- Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.
- Do not disassemble or short-circuit the battery pack.
- Keep the metal contacts of the battery pack clean.
- Replace the battery when it no longer provides acceptable performance. The battery pack maybe recharged hundreds of times until it needs replacing.
- Recharge the battery if it has not been used for a long time to maximize usability.
- Do not expose the battery charger to direct sunlight or use it in high humidity, such as in the bathroom.
- Do not leave the battery in hot or cold places, this may deteriorate the battery performance.
- There is risk of explosion if the battery is replaced by an incorrect type.
- Dispose of used batteries according to the manufacturer's instructions. Please recycle when possible. Do not dispose as household waste.
- Dispose of used batteries according to the manufacturer's instructions.
- If you need to replace the battery, take it to the nearest authorized LG Electronics service point or dealer for assistance.
- Always unplug the charger from the wall socket after the phone is fully charged to save unnecessary power consumption of the charger.

SERVICE CENTER LIST



SERVICE



1800-180-9999*

* MTNL / BSNL
** Prefix STD Code

39-01-0909**

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Adhoni	RS CDMA	21/490,Arts & Science College Road, Near Devi Nursing home, Adhoni	9346490905	Mr.Mohan
Andhra Pradesh	Adilabad	KIRAN MOBILE WORLD	7-14-78/A, Near Nethaji Chouk, Cinema Road, Adilabad	9346358181	kiran kumar
Andhra Pradesh	Amalapuram	SANDESH CELLULAR	Shop no 5 R.K. TOWERS COLLEGE ROAD AMALAPURAM	9346398838	Mr.RAVI KUMAR
Andhra Pradesh	Anantpur	RK LG CDMA	Shop No 3, Cellular,Pallavi Towers, Opp to Canara Bank,Subash Road, Ananthpur	9393722777	Sridhar
Andhra Pradesh	Armoor	SAI SRI Electronics	Shop.no.2, mahalakshmi road, Armoor	9392622038	Mr.srinivas
Andhra Pradesh	Bapatla	Vijaya Communications	G.B.C.Road, Bapatla	9346206505	Mr.B.Siva
Andhra Pradesh	Bhimavaram	Gopi Krishna Communications	JP Road Near Mohan Service Center Bhimavaram	9346700202	Mr.Siva
Andhra Pradesh	Chirala	Lakshmi Infocomm	Munthavani street, sangam thestre Road, Chirala	9347052181	Ms.Shakeena
Andhra Pradesh	Chittoor	CMT Computer Services	20-439, A.S.M.STREET, MITTOOR, CHITTOOR	9347361979	Mr.Gopi
Andhra Pradesh	Cuddapah	Srinivasa Communication	Shop No.4, Siddapriya Complex, Opp. HP Petrol Pumping Point, Cuddapah	9346350224	Mr.Sahadeva Reddy
Andhra Pradesh	Dharmavaram	Siddharta Communications	Opp to Sathya Lodge, PRC Circle, Dharmavaram	9347064101	Mr.Naresh
Andhra Pradesh	Eluru	S.S.COMPUTERS	Door.No:23B-4-8/3, Ayyapa Complex, Beside Kanuni Madhavi Hospital, Subbama Devi School Road, R.R,Pet, Eluru	329294	Mr.DIWAKER
Andhra Pradesh	Gudivada	KANAKADURGACOMMUNICATIONS	SHOP NO-4,C/O SURYA RESIDENCY, OPP-VIJAYA GAS COMPANY,ELURU ROAD,GUDIVADA	9394220688	Mr.KUMAR
Andhra Pradesh	Gudur	Srinivasa Electronics	1st floor, Airtel Building, Kummari Veedhi,Gudur	9390829440	S. Naga Suman
Andhra Pradesh	Guntur	Vasavi Associates	Shop No.21,Central Plaza,Naaz Center,Guntur	3257789	MR.Satyan
Andhra Pradesh	Hazunagar/Kodad	Sri Pavan Electronics	Malika Towers, Besides Reliance Web World, Kodad	9346901519	Mr Narasimha Rao
Andhra Pradesh	Hindupuram	S.V.A Cellular	Shop.no:3,Vinayaka Lodge, Railway Road, Hindupur	9390000135	Mr. D.B.Ravindra Nath
Andhra Pradesh	Huzurabad	BHARGAVI COMMUNICATIONS	DCMS Complex, Near bus Stand, main road, Huzurabad	9391755619	T.VISHNU YARDHAN
Andhra Pradesh	Hyderabad	SUNBEAM TECHNOLOGIES	120,Chenoy Trade Centre, Parklane, Near Paradise,Secunderabad	40200195 / 66383193	Mr.Suresh
Andhra Pradesh	Hyderabad	Bhagya Communications	Shop no:109, Upper Ground Floor,#12-2-825, S.G.M. Mall, Mehdiptnam, Hyderabad	32972308, 32001406	Mr.Bipin

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Hyderabad	JVR Infotech Pvt Ltd	Shop No 8 ,Vanija Vihar, Nalanda Building, Dilsukh Nagar Main Road, Hyderabad	24161848, 55109604	EV Ramakanth
Andhra Pradesh	Hyderabad	PRIMUS INFOMATIC & SOFTWARE PVT LTD	#18/A/Methodist Complex, 5-9-190, Lane Opp to Chermas, Abids, Hyderabad	66755111	Mr.Govind Kabra
Andhra Pradesh	Hyderabad	Reliable Communication	G-8, 3-6-561 ,AALTO'S A & M Trade Centre, HIMAYATNAGAR, HYDERABAD	32913251	Mr.Sandeep.soni
Andhra Pradesh	Hyderabad	S V Electronics	Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hyderabad	55754477 32977389	Mr.Pradeep
Andhra Pradesh	Hyderabad	Shweta Communications	Shop No.9, Ground Floor, Pavani Ansuya Complex, Opp. Huda Complex, Tarraka, Hyderabad	32968162	Mr. Sandeep Heda
Andhra Pradesh	Hyderabad	Shweta Computers	# 1-7-69/1 & 2, OPP Aditya Delux Hotel, Near Paradise circl, Sarojini Devi Road, Secunderabad	27721076, 32977548	Mr.Jagdish
Andhra Pradesh	Hyderabad	Sreenivasa Technologies	SAI VIKRAM TOWERS, SHOP NO -4,RELIANCE WEB WORLD BUILDING, Balaji Nagar Kukatpally	32961479	Mr.Praveen
Andhra Pradesh	Hyderabad	Sri Surya Communications	#Madhu Enclave,Street no 06,Shyamal Buildings, Begumpet , Hyderabad	32961127	Mr.Nageswara Rao
Andhra Pradesh	Hyderabad	Sri Varun Electronics	D.No 5-8-344/1, " DHAN BHAGYA ESTATE ", Chirag Ali Lane, Abids, Next to Raghava Ratna Towers, Hyderabad	32900909 55781999	Mr.Alok Mohan
Andhra Pradesh	Hyderabad	VICTORY ELECTRONICS	Shop No. B-1, Quli Qutub Shah Stadium, Opp. City College, Hyderabad	32408999, 24502339	MR.BLVARMA
Andhra Pradesh	Jagityal	SS Communications	Opp to L.G.RAM. Lodge Street, Park Line, Jagityal	9391533535	Mr.Hari
Andhra Pradesh	Jangaon	SKY WIN COMMUNICATIONS	#2-7-134, Beside Bharat Gas, Bus stand Road,Jangaon.	9390102839	VARLUN
Andhra Pradesh	Jangareddygudem	SRI DEVI COMMUNICATION	Near Maulama Temple, Opp.Andhra Bank,Jangareddygudem	227297	Prasanna Lakshmi
Andhra Pradesh	Kakinada	Delta Infotech	Door No. 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya Rao Pet, Kakinada	5593533	Mr. Shivanand
Andhra Pradesh	Kamareddy	Pager King Communication	Sircilla Road, Kamareddy, Dist. Nizamabad	9397366633	Mr. Moizuddin
Andhra Pradesh	Karimnagar	SS Marketers	2-8-40, Mukarampura, Near Circus Grounds, Karimnagar	9391552223	Sujan
Andhra Pradesh	Kavali	Sree Balaji Infotech	Trunk Road,Near Ongole Bus stand, Kavali, Nellore District, Andhra Pradesh	6329567	Mr. G. Sri Sai Charan
Andhra Pradesh	Khammam	Sriven Technologies	D.No:11-2-37,Shop No.3, D.V.Krishna Complex, Beside Baburao Petrol Bunk, Balaji Nagar, Wyrva Road, Khammam	325567	Mr.Bhaskar Reddy
Andhra Pradesh	Kothagudem	S.Swathi CDMA Service Center	9-3-3,Above Sindhura Electronics, Near RTC BUS Stand,Kothagudem	9391552228	Mr.niaz Ahmed
Andhra Pradesh	Kuppam	SAGAR COMPUTER SERVICES	14-124, PALACE ROAD, KUPPAM	9391862436	Mr.Sagar
Andhra Pradesh	Kurnool	R K LG CDMA	Shop no:13, First floor, UCON Plaza, Kurnool	220201	Mr.G Rama Krishna
Andhra Pradesh	Machilipatnam	Om Sree Sai Communications	25/276, Kota Vari Tulla Center, Jagannadapuram, Machilipatnam	9347741777	Mr.Rafee
Andhra Pradesh	Madanapalle	Sri Balaji Computers	Shop No:2, 1st floor, Sri sai Complex, CTM Road, Madanapally	9390025204	Ravi Kumar

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Mahabubnagar	SRI Chakra mobile care centre	Shop.no:15.Shareef Complex, Near Bus stand, Mahbubnagar	9396348999	Mr.Anil
Andhra Pradesh	Manchiryal	SS CDMA Service Centre	Shop no.7,Mounika Complex,BPL Chourasta,Manchiryal	9394552223	Mr.T. Nagaraju
Medak	Kavali	Balaji Communications	Door.no:1-3-77/j, Opp to State bank of Hyderabad, Main Branch, Main road, Medak	9346439961	Mr. Rajkumar
Andhra Pradesh	Medchal	Khan Electronics	Sanjeeva Reddy Complex, Besides RTC Bus Depot, Medchal	9347222088	Mr. Jaleel Khan
Andhra Pradesh	Miryalguda	Needs Electronics	Jagannath Complex, Opp Bus Stand, Miryalguda	9394645696	Mr Ravi Kumar
Andhra Pradesh	Nalgonda	Quintessence Electronics	Shop No .5,Srinivasa complex, Opp to market office,HYD road, Nalgonda	9396610220	Mr Venkateswar Rao
Andhra Pradesh	Nandyal	Dhanush Systems,	Dno:25/165 B,Sanjeev Nagar, Near Ramalayam, Nandyal	9392236699	Mr.Ramesh
Andhra Pradesh	Narasaraopet	Rajendra Infotech	C/o Hari priya Electronics, Arundelpet, Narsaraopet	224136	Mr.Sasi Bhushan
Andhra Pradesh	Nellore	Siri Enterprises	Co-Operative Bank Complex, 1st Floor, Shop No: 26,Near Gandhi Statue, G.N.T.Road, NELLORE, Andhra Pradesh.	3290339, 9398309571	Mr.Pratap
Andhra Pradesh	NELLORE	Balaji Watch & Electronics	16/249,Trunk Road,Nellore	2339999	Mr.Rajesh
Andhra Pradesh	Nirmal	OM SAI Electronics	Shop.no:1, Kala Nagar road, Beside 2 town Police station, Nirmal	939000024	Mr. Mahendar
Andhra Pradesh	Nizamabad	Satya Electronics	# 7-10-65,Shop no 1, 1 st Floor,H.M.HV Complex,Beside Bus Stand,Nizamabad	326000	Mr.Satjam
Andhra Pradesh	Ongole	TejaSri Communications	37-1-107,Near Mastan Darga Center,Trunk Road,Ongole	9393026115	Mr.SASI BHUSAN
Andhra Pradesh	Peddapalli (Ramagundam)	Abhi Marketers	Shop No:19/8/291, MRK Plaza, Lakshmi Nagar, Godhavani Khani	9347077009	Srinivas
Andhra Pradesh	Peddapuram	Devi Infotech	Opp.Veterary Hospital, Shop No-1, Santa Market Road,Peddapuram	9394864400	Mr.Siva Kumar
Andhra Pradesh	Prodattur	SV Technologies	4-625-3,Gandhi Road, Opp Kanur Vysya Bank, Produttur	9347251806	Mr.Ravi Kumar
Andhra Pradesh	Putturu	Siva Sai Computer World	8-104/C, VIJAYA LAKSHMI COMPLEX TIRUPATI-CHENNAI ROAD, PUTTUR	9393028024	CJanardha Reddy
Andhra Pradesh	Rajamundhary	Siri Infotech	Police Welfare Complex, City Hospitals Junction, Danvai Pet Main Road, Rajhamundry	2421567	Mr Raghendra
Andhra Pradesh	Raychoti	Raju Computer World	Room No 3 Up Stairs Syeedia complex, bustand road, Rayachoty	9346209881	Mr.Raju
Andhra Pradesh	Repalle	Sri Satya Solutions	10/14-126Municipal Office Road,Raipet,Repalle	9396222993	Mr.Sridhar
Andhra Pradesh	Sangareddy	Sri Technologies	Srimaan Complex, Beside Inspection Bungalow, Main Road, Sangareddy	9391216573	Mr.AJAZ AHMED
Andhra Pradesh	Sattenapalli	S.S. Communications	Opp.Telephone Exchange, Sattenapalli	9397610550	Mr.Sai
Andhra Pradesh	Shad Nagar	Sri Gana Electronics,	Shop No : 2, Khajaja Veeresam Complex, College Road, Shadnagar	9392633111	Mr. Vigneswar
Andhra Pradesh	Siddipet	Gopala Krishana Communications	SHOP NO:13, FIRST FLOOR, MACCA COMPLEX, OPP-CITIZENS CLUB, M.G ROAD, SIDDIPET	9392511064	Mr. Kura Grindhar
Andhra Pradesh	Srikakulam	SRI SAI COMPUTER SHOPPE	OPP TEJA TIFFIN CORNER,G. T. ROAD, SRIKAKULAM	9390611779	MR SESHAGIRI
Andhra Pradesh	Srikalahasti	KSV Computer Services	NNR Buildings, d.no: 16-582, Panagal road, Srikalahasti	9390044399	SAHADEVA REDDY

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Sullurpet	Sai Baba Electronics.	D.No. 10/47, Bapuji Steet, Sullurpet	9346920527	S. Venkata Krishna
Andhra Pradesh	Tadepalligudem	SRI HARIPRIYA INFOTECH	THOTA GORI COMPLEX PLOICE QUARTERS LANE, BESIDES ZP HIGH SCHOOL, TADEPALLIGUDAM.	9346408640	Mr.Suresh
Andhra Pradesh	Tanuku	SHIVANAND ENTERPRISES	D/NO-34-3-3, MAIN ROAD GAMINI COMPLUND TANUKU.	220489	Mr. SRINIVAS
Andhra Pradesh	Tenali	Vaishnavi Infotech	D.No:22/11/114, Opp.Kanikacharla Kalyanamandapam, Bose Road, Tenali.	9347651330	Mr.Murali
Andhra Pradesh	Tirupathi	CMT Computer Services	18-1-624 VV Mahal Road,OPP HDFC BANK, Tirupathi	3296979	Mr.K Vasu Naidu
Andhra Pradesh	Vijayawada	K L Computer House	39-9-46 SVS Temple Street,Labbipet,Vijayawada	5520461, 5671461	Mr.Kartik
Andhra Pradesh	Vijayawada	V V Communications	28-23-31/32,OPP.SWARUGHA FOODS,VIJAY TALKIES CENTER,VIJAYAWADA	9396467789	Mr.Rahul
Andhra Pradesh	VIJAYAWADA	Balaji Watch & Mobiles Pvt.Ltd	29-37-79, Eluru Road, Opp. Vijaya Talkies, Vijayawada	6648888	Mr.Prasad
Andhra Pradesh	Vishakapatnam	Sri Sai Ganesh Infotech	G5,Ground Floor, Backside of Sangam-Sarat Theatre,1st Lane,Dwarka Nagar, Vishakapatnam	3258777	Mr.Chandra Shekar
Andhra Pradesh	Vishakapatnam	Jai Bharani Communications	Door No:52-11-7/7, Sapthagiri Plaza, Old Resuvanipallem, Vishakapatnam-13	3242111	Mr.P.Venkatapathi Raju
Andhra Pradesh	Vizayanagaram	S R TECHNOLOGIES	DRNO 17-2-29, RAJABAZAR, VIZAINAGARAM	9346418791	Mr.Balakrishna
Andhra Pradesh	Vuyyuru	Sugreeva Communications	Behind Datta Automobiles, Katturu Road, Vuyyuru	9395033555	Mr.Phani
Andhra Pradesh	Wanaparthy	Sri Ganesh Electronics	Shop No : 16-63, Opp R R Complex, Wanaparthy	9396800275	Mr Deva Raj
Andhra Pradesh	Warrangal	S S Marketers	6-1-73/1, Sai Bhavan, Sidevi Theatre Road, Hanamkonda, Warrangal	2552223	Mr. L.Srinivas Rao
Assam	Guwahati	A B PERIPHERALS & SERVICES	Wahed house, 2nd Floor,Opp ASTC Volvo point, Ulubari, Kamrup, Guwahati	2732417	Wassi Ahmed
Bihar	Arrah	Surya Services	Sushila Bhawan, Suryapuri colony, By pass road, Arrah	9334538845	Sanjay Kumar
Bihar	Aurangabad	Computer Sansar	L.P.Complex,old G.T.Road, Aurangabad, Bihar, PIN:824101	9334926768	Shreenivas
Bihar	Begusarai	Krishna Communication	Eashwari Complex,Dak Bangla Chowk, Bishnupur, Begusarai, Bihar-851101.	9334341700	Dinkar Kumar
Bihar	Bhagalpur	S.K. Communication	NEAR RAILWAY STATION,Super market complex, Patel Babu road, BHAGALPUR - 812001	9334255275	Kundan Kumar
Bihar	Bhagalpur	Printronix Infosolutions	Ganpati Complex,1st floor, Patel babu road	9934629247	Himansu Shekhar
Bihar	Biharsharif	Shanya Infotech	Magdha Commercial Complex, 1st.Floor, Shop.No.5, MG Road, Bharaopar,Bihar Sharif, Nalanda Dist. Bihar,Pin:803101	9334048037	Amit Kanchan
Bihar	Chapra	Ambey Associates	D-23, Hathwa Market, Chapra,Dist: Saran, Bihar, Pin:841301	9334295605	Jayant Kumar
Bihar	Darbhanga	Prime Computer	Hanuman Nagar, Doner Road, Darbhanga.	2220560	Abhinav Kumar Verma
Bihar	Gaya	Agrawal Distributors	Swarajpuri Road (Opp. Naghatia Road), Waves Building,Gaya, Pin:	9334218122	Lalit Agrawal
Bihar	Muzafarpur	Krish Enterprises	Nr:Kanhoulina,ko.2, Kachisarai Road, Muzafarpur.	9304410745	Sanjeev Kumar

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Bihar	Patna	INFOTEK TRADING COMPANY	1st floor, City Palace, New Dak Bunglow Road, Patna-800001	2227166	Sanjay Choubey
Bihar	Patna	Synergy Trading Company	G-01.Chanakya Plaza Complex,Main Road, Kankarabagh, Patna.8000020	2356900	Vikas Chandra
Bihar	Patna	COMPETENT MOBILE SERVICE	Shop 1, Hotel Lalitha Complex, East Bowling Canal Road, Patna	9334027706	Mohit Ahluwalia
Bihar	Patna	Micro Zone-Patna	17/C,S,K Puri, Near Basawan Park	3294696	Mithlesh Kumar
Bihar	Purnea	Micro Zone-Purnea	Narottam Hata,NH-31, Purnea	9304166633	Amit Kumar
Bihar	Sasaram	Nandika Enterprises	Hari Complex, Panjab National Bank, Sasaram, Rohtas (Bihar)	4222008	Abhinav Gupta
Chhattisgarh	AMBIKAPUR	NEHA COMMUNICATION	Ramanuj Ganj road, Opp. Kosa Form , Ambikapur , Surguja, Pin-497001	440414	Mr.Rishi Dubey
Chhattisgarh	Bhilai	A B Automation	Shop No 117 , Ground Floor , Chouhan Estate, Supela Bhilai	09329750711/ 0788-2295989	Mr. Satish Singh
Chhattisgarh	Bhilai	Sai Ram Electronics	SHOP-NO-52/90, HIMALAY COMPLEX, AKASH GANGA, SUPELA, BHILAI	4038917	Mr. Balan
Chhattisgarh	Bilaspur	Mahamaya Infotech	Shop No 203, Jain Plaza, Ground floor, Link Road, Bilaspur	2413865	Mr. Pawan Kumar
Chhattisgarh	KORBA	STAR MOBILE SERVICES	SS Plaza FD-13 PH Road Korba Chhattisgarh	9300401485	Mr. Anish Menon
Chhattisgarh	Raigarh	BLUE CHIP COMPUTER	Purana Sadar Bazaar, Raigarh, Chhattisgarh.	329888	Mr. Ashok Agrawal
Chhattisgarh	Raipur	Cybernet Systems	B-2,1st floor, Garchaz Complex, Jail Road, Raipur - 492001	077-14069971	Mr Anand Singh
Chhattisgarh	Rajnandgaon	BHAYVE SERVICES	SHOP NO 5 , BELOW SBI , KAMPTEE LINE , RAJNANDGAON	395200	MANISH GOLCHA
Delhi	Delhi	Aegiss Infotech	UG-25 , Ansal Chamber -2, 6, Bhikaji Cama Place, New Delhi-110066	65477740 , 9312294105, 9313796774	Mr. Atul Gupta
Delhi	Delhi	Arham Infotech Services	1/1, Regal Building, Near Malik Sweets, Connaught Place New Delhi - 110 001.	011-41501124, 011-32584421	Mr. Anil Surana
Delhi	Delhi	Comhard Systems	D-30.31, First floor, Near Hotel Shipra, Main Vikas Marg, Lakshmi Nagar	011-32955887, 9818867678, 011-32979819	Mr Ravi Kant Gupta
Delhi	Delhi	Comhard Systems	B-120, Hardev Pun, 100 Feet Main Road, Near MTNL Office, Nathu Colony Chowk, Shahdra, New Delhi - 110 093.	011-32575507 , 011-32572427	Mr. Ravi Kant Gupta
Delhi	Delhi	Connexions and Communications	183, Avtar Enclave, Opposite Nirula's , Pashchim vihar ,New Delhi-110063	011-32451431, 011-65237374	Mr. Bhupinder Agrawal
Delhi	Delhi	Cube Engineers and Consultants Pvt Ltd	A-65, Naraina Industrial Area, Phase-1, New Delhi	09312224103, 011-65450272, 41411623	Mr. Avinder
Delhi	Delhi	Innovative Telecom	304 , GDITL Northex Towers, A-09 ,3rd Floor , Northex Tower, Netaji Subhash Place, Pitampura, New Delhi-110 088.	011-32925753, 011-65154343, 9811682453	Mr Manoj Garg
Delhi	Delhi	Nice Telecom	15/19 & 15/21, DDA Complex, Nangal raya, Near D Block, Janakpuri, Delhi - 110046	011-32607072, 0-9213264403	Ripul Garg

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Delhi	Delhi	R K Communications	2516 Hudson Lines, Kingsway Camp-Nr. Kamla Nagar, New Delhi	011-32508861, 9312606463	Mr. Pradeep Aggarwal
Delhi	Delhi	Sagar Technologies	J-39,Central Mkt, Lajpat Nagar-II, New Delhi-110024	011- 65425644, 9350224692	Mr.Manoj Kumar
Delhi	Delhi	Sukriti Communication	101 Patparganj- Mayur Vihar phase -1 - New Delhi -110091	011-32498011, 011-65238011	Mr.Dipendra kumar chaturvedi
Delhi	Delhi	Touch Tone Telecom	B-52, First Floor, Kalkaji, New Delhi	011 32939031, 011-65672800	Ashish Dey
Delhi	Delhi	Ucom Technologies Pvt.Ltd.	45, 1st Flr, Corner Mrkt, Malviya Nagar, New Delhi - 110017	011-41745469, 09212131300	Mr. Neeraj
Delhi	Delhi	Telecom systems	67/4, harshvihar chowk, pitampura, new delhi	9910089333	mr. Satbir
Delhi	Delhi	Shine telecom	N-18, SOUTH EX-1, NEW DELHI	9811143204	Mr. Naveen Goyal
Delhi	Delhi	Elcom Trading Company Pvt.Ltd.	G-1, Goverdhan Building, 53-54, Nehru Place, New Delhi -110019.	9310577009, 011-64582709	Mr. Somesh Narang
Delhi	Delhi	Teletalk	C-21,First Floor, Near Bus Stand, Bhajan pura, Delhi-110053	9818400551	Mr.B.c. Vashist
Goa	Panjim	Mandovi Mobles	Mohidin Towers Do. No. AS3 Opp to Hotel Manashanti Dadavaiyda rd Panjim-403001	6452949	Prakash
Gujarat	Ahmedabad	Vision Communication	33, 1st Floor, Sukh Sagar Complex, Opp. Dinesh Chamber, Bapunagar, Ahmedabad	65122322	Mr Ajay Kachhadia
Gujarat	Ahmedabad	M Age Cellnet	A-176, Popular Plaza, Near Someshwar Part -1, 132 Ft. Ring Road, Satellite, Ahmedabad	30122838	Mr K Jairaj
Gujarat	Ahmedabad	A Com Technologies	Shop No-37, 1st Floor, Shubh Complex, Near Rajasthan Hospital, Camp Road, Shahibaug, Ahmedabad	32940560	Mr. Vijay.S.Gohel
Gujarat	Ahmedabad	Mishree Communication	FF-17, RUDRA SQUARE, OPP. JUDGES BUNGALOW, POLICE STATION, BODAKDEV, AHMEDABAD	32508491	Mr. Mitesh Patel
Gujarat	Ahmedabad	Silicon Valley	9, Gokul Palace, Maninagar Cross Road, Maninagar Ahmedabad	30225430	Mr. Rajesh Patel
Gujarat	Ahmedabad	Shiv Sai Communications	21.Municipal Market, C.G.Road, Ahmedabad	66057999	Mr. K.Jayraj
Gujarat	Amreli	Precision Telecom	32.33 Opera House, Station Road, Amreli.	230940	Mr. Kamlesh Tank
Gujarat	Anand	Desktop Infosystems	B/10, Vaibhav Tower, V V Nagar Road, Anand	246885	Mr. Dipesh Patel
Gujarat	Ankaleshwar	Akshar Telecom	C 1 Keval Shopping Center,old National Highway No.8,GIDC ,Ankaleshwar	02646-250860	Mrs. Anita Amin
Gujarat	Bharuch	Akshar Telecom	Pramukh Swami Complex, Panch Batti, Bharuch	26422241027	Mr. Harif Patel
Gujarat	Bhavnagar	Shivshruti Services	98/B, Makvana Building, Down Chowk, Bhavnagar	3296222	Mr.P D Jala
Gujarat	Bhuj	Infotech Computer	2nd Floor, NarNarayan Chambers, Opp Indian Airlines Office, Station Road,Bhuj	324295	Mr. Vasant Mepani
Gujarat	Gandhidham	Vansh Electronics	Shop No. 35, Swami Vivekanand Complex, Near Oslo Circle, Gandhidham	252739	Mr. Siddarth Gajjar
Gujarat	Gandhinagar	Creative Communications	Shop No 102,Saman City,Sector 11,Gandhinagar	23226241	Mr. K.J.Barot

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Gujarat	Godhra	Binary Computers	34, Lohhandwala Complex, LIC Road, Nr. Chitra Cinema, Godhra.	9376589019	MR. A. Raja
Gujarat	Himmatnagar	Jay Telecommunications	B-F 105, 1st floor, Durga Complex, Near Railway Station, Himmatnagar	329532	Mr. Manibhai Patel
Gujarat	Idar	Maruti Communication	3, Sarvoday Market, Near Bus Stand, Behind Sarvoday Guest House, Idar		Mr. Niraj Patel
Gujarat	Jamnagar	Sudarshan Infosys	"Shradhdh", Park Colony, Motor House, Near UTI Bank, P.N.Marg, Jamnagar	2552696	Mr. Amit Unadkat
Gujarat	Junagadh	K.J.Traders	29/30, Danapithi, Junagadh	2627320	Mr. Paresb Rughani
Gujarat	Kalol	Maitree Communication	B/93,Yogi Complex, near Mahendra Mill Road,Kalol	325288	Mr. Jignesh Shah
Gujarat	Mehsana	Prime Computer Consumables	83-B, Vimal Super Market, B K Road, S.T.Workshop Road, Mehsana	2325123	Mr. Suketu Patel
Gujarat	Morvi	Pulse Sales and Services	Madhav Market, 1st Floor, Near New ST Stand, Sanala Road Morbi.	300433	Mr. Natubhai Patel
Gujarat	Nadiad	D.C. Infosystems	105, Municipal Shopping Centre, Opp.Paras Cinema, Santram Road, Nadiad.		Mr. Dipesh Patel
Gujarat	Navsari	Deep Enterprise	10, Upper Level, Diamond Palace, Sattabir, Sayaji Road, Navsari-	02637 324095	Mr. Vinod Kasundra
Gujarat	Palanpur	Shree Manibhadra Mobile	16, 1st Floor, Aroma Arcad, Opp. Joravar Palace, Palanpur	320321	Mr. Panchal Sunil D
Gujarat	Patan	Able infotech	F/9, palika bazar complex, rajmahal road,near sanktoba hall, Patan	226400	Mr. Rakesh Bhai
Gujarat	Porbandar	Varun Infotech	1ST Floor,Garden Cafe Building, Opp.New Fountain, Nr.R.T.O Office, Porbandar	3290285	Mr. Mitesh Changela
Gujarat	Rajkot	Joshi Telecom	Shop No.8, Kuber Complex, Opp Chandubhai Belhelwa, Dr Yagnik Road, Rajkot	6530707	Mr Jiten Dave
Gujarat	Rajkot	Roopang infocare	Vinod Nivas, 4, Sardarnagar(West), Nr Astron Cinema, Rajkot	6950111	Mr. Kishore Patel
Gujarat	Sanand	Ravi Communication	37,Sagar Complex, Opp.Hotel Khabbar, Sarkhej Bavla Cross Road, Sanand	32401211	Mr. Ravi N
Gujarat	Surat	Om Sai Services	39,Golden Point,Near Science Laboratory, Ring Road, Surat -	2613231233	Mr. Dharmesh Patel
Gujarat	Surat	Yash Telecom	M-20, Centre point, Near Kadiwala High School, Civil Cross Road, Ring Road,Surat-395002	0261 2477903	Mr. Rehan Saikh
Gujarat	Surat	Excel Solutions	H-3, Ruchi Flats, Near Iqara Building, Adajan Hazira Road. Surat-	0261-6544500	Mr. Virender Jain
Gujarat	SurenDRanagar	Nihaal Computer Services	94, old housing board, opp school no 13, SurenDRanagar	320375	Mr. Sikandar
Gujarat	Vadodara	Shreeji Telecom	CF 13, Sterling Shopping Center,R.C.Dutt Road,Alkapuri, Vadodara -	0265-3059363	Mr. Jignesh Gohel
Gujarat	Valasad	Klassik Stationo Products	10, Jethalal Muji Market, Halar Road,Valasad -	02632-329363	Mr. Darshan Panchal
Gujarat	Vapi	Klassik Stationo Products	116, Bhanudarshan Co-Op Society, Koparil Road, Near Gujran Cinema, GIDC, Vapi	0260-3292363	Mr. Avishek Suhasaria
Haryana	Ambala	Bee Ess Aar Communication	92-93, Gandhi market, Ambala Cantt-133001	2641234,	Rajiv Gupta

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Haryana	Bahadurgarh	Unique Telecom	5.Rajaram Market, Main Najafgarh Road, Bahadurgarh, Near Bajaj Showroom	9515873676, 93550941877	Mr. Harinder
Haryana	Bhiwani	Sandeep Electronics	10 th Plot, First Floor, Circular road, Mahem Gate Chowk, Near Dr. Kajaal's Nursing Home, Adjacent to Rameshwar's Sweet House, Bhiwani, Haryana - 127021	252000	Mr. Sukhveer Saini
Haryana	Faridabad	Comsoft Computers	601/1 Gopi Colony Chowk- Sector-19 , Near Prem Prakash Ashram, OLD Faridabad-121002	0129-3293512, 0129-4104252, 9310977888	Mr. Ashwani Jindal
Haryana	Faridabad	VR Infocomm	Shop No.44, Neelam Fly Over, Neelam Chowk, NIT Faridabad.	0129-4031959, 0129-3208737	Mr. Virod Kumar Gupta.
Haryana	Faridabad	Sky lark mobile point	4, G.T.Road, Near Bus Stand, Marla Colony, Fatehabad	0989655244	Pankaj
Haryana	Gurgaon	Signature Communications	B-100 A , South City -1, Opposite - Huda Gymkhana Club - Gurgaon 122001	0124-3256565, 0124-4102709	Raj Kumar Garg
Haryana	Gurgaon	Lalji Communication	SCO-31 , - First Floor, Above MTNL Sanchar Haat, Main Market, Opp. BSNL Exchange, Sector-12A, OLD Gurgaon -122001.	95124-3200900	Mr.Bharat Bhushan
Haryana	HISAR	M K ELECTRONICS	SHOP NO-4A,FIRST FLOOR, NEELKANTH COMPLEX, CAMP CHOWK, MAIN DELHI RD.	9991090260	MANMOHAN KRISHAN
Haryana	Hissar	Parnami Communication	32,Neel Kamal Complex, Red square Market,Near Elite Cinema Hall, Hissar, Haryana-125001	09354332000	Mr. Pradeep Garg
Haryana	Jind	Gaurav Telecom	Main Bazar, Near rani Talab, Near Bharat Electronics, Jind	325400	Deepak Garg
Haryana	Kaithal	Mahesh Communication	Shop no.22, Bajrang Bali Market, Near Randhir cinema- Kaithal	9515146000	Mr. Mahesh
Haryana	Karnal	Mass Communication	Shop No.69, Main Market, Ground Floor, Moughal Canal, Karnal - 132001	3290717	Mr.Harish
Haryana	Kurukshetra	Bharti Communication	3,Krishna Market, Opp.Abhay Palace, Pipri Road,Kurukshetra,Haryana-	01744-327717	Mr. Ramesh
Haryana	NARNALUL	PRIME COMMUNICATION	Shop no.8 , 1st floor Taneja complex, near Nirula Hotel , main Road Narnaul	9355375351	MR. Naveen
Haryana	Palwal	Shree Ganesh Communications	Basant Apts, Shop No.5, Kithwari Chowk, Mathura Road, Near Saraswathi School, Palwal	01275-321028, 09315403328	Harish Chandra
Haryana	Panipat	INS Telecom	2, Bishan Sanap Colony, Opp Bus Stand, Near Hotel Deep, Panipat	3291860	Jagdeep Sachdeva
Haryana	Rewari	Mahtak tele services	53-A, Model Town, Near Shreeji restaurant, Rewari	01274-329222	Gaurave yadve
Haryana	Rohtak	Telecentre	Shakti Market, Civil Hospital Road, Near Chhotu Ram Chowk, Rohtak-124001	247242	Mr.Madaan
Haryana	Sirsa	Sirsa Communication	168,Huda Complex, Old Bus Stand, Sirsa	0166-329591	Rajindera
Haryana	Sonipat	Televorld	Shop No 20, 1st Floor, M.C.Market, Subhash Chowk, Sonipat, Haryana-138001	3290889	Vipin Dua
Haryana	SONPAT	RELIABLE TELLY SHOPPE	OPP. OLD CIVIL HOSPITAL RLY ROAD SONIPAT NEAR S.B.I. BANK, SONEPAT	9991090252	UMESH CHAUDHARY
Haryana	YAMUNAGAR	KRISHNA COMMUNICATION	SHOP NO.19, 20-A 1ST FLOOR, WORKSHOP ROAD, YAMUNAGAR	9354784019	MR. SURESH/ Mr.Sandeep

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Haryana	Yamunanagar	Manish Communications	Shop No.3, Sharma Colony, Near Mahindra Petrol Pump, Yamunanagar - 135005	233277	Vinod Kumar Mittal
Himachal Pradesh	MANDI	V.M. COMMUNICATION	NEAR PNB MOTI BAZAAR, MANDI-175001	9816024978	M Mahender Singh Thakur
Himachal Pradesh	Palampur	Electronic Home	Kallu Di Hatti,PO Maranda Thasil, Palampur, Distt-Kangra-176102	01894238463	Mr. Ravi Kumar
Himachal Pradesh	Poanta Sahib	SINGAL MARKETING	Badri Nagar,Near LIC Office, Poanta Sahib	9318715848	Mr. Rajesh singal
Himachal Pradesh	Shimla	Hanu Computers	76/ 9, 2nd floor Lower Bazar Shimla	9418068421	Sandeep Patial
Himachal Pradesh	Solan	Vikas Mobile Repair Center	MOHAN COMPLEX, First Floor Upper Bazar, Solan-173212	9816271183	Vikas
Jammu	Jammu	MOBILE CARE	608-A Gandhi Nagar Behind Laxmi Narayan Mandir	0191-2436814	Mr Dooit Gupta
Jammu	Srinagar	THE NET SURFER	2nd Floor Mohi-ud-Din Building, Pokoview, srinagar	0194-2459549	Mr Wasim
Jammu	Udhampur	SERVICE SOLUTIONS	Ward No. 15 Shakti Nagar Opp. Old ITI Udhampur	01992-276724	Mr Rakesh
JHARKHAND	BOKARO	Digital Equipment Centre	GB-11, City Palace, Opp.Indian Bank, Bokaro.	9334072270	Dewashish Ojha
Jharkhand	Daltonganj	MAA MOBILES	Jail Road, Jail Hata, Dalton Ganj-822101	9304285663	Mr.Navin Kr. Kashyap
Jharkhand	Deogarh	Kanan Electronics	Hotel Relax Complex, BLC Road, Deogarh-814112	9304059528	Mr. Mahesh Sharma
Jharkhand	Dhanbad	Nirmala Entreprises	Ground Floor, Muskan Complex, Nr.Subhash Chowk, Dhanbad.	9334027583	Mr.Niraj Saha
Jharkhand	Godda	Karan Mobilink	Maa Kalyani, Katra, Main Market, Godda-814133	9334525200	Mr.Saroj Kumar Jha
Jharkhand	Hazaribagh	Digital Services	Plaza Mkt, pugmill road, Nr.Kallu Chowk, Hazaribagh.	9334599570	Mr.Shish Alam
Jharkhand	Jamshedpur	Tirupati Teletech	Chakravarti Compound, Near Hotel Castel, Contractors area, Bistapur, Jamshedpur-831001	0657 3293331	Abhijeet Mukherjee
Jharkhand	Jamshedpur	Prasad Electronics	Nr:Bus stand,Community Center, Kagal Nagar, Jamshedpur.	0657-2226077	Mr.Raju/ Saritha
Jharkhand	Ramgarh	Shreyas Empire	Bus Stand Complex, Ramgarh-829122	9334085642	Mr.Piyush
Jharkhand	Ranchi	Balaji Infotech	Near Dr.Kashyap Eyeclinic, Purulia Road,Ranchi.	0651-3205400, 9304412277	Mr. Sanjeev, Mr. Sunil Kedia
Jharkhand	Ranchi	Satya Systems & Solutions	158, Opp Hotel Palace, Kadru, Ranchi-834002	0651 3291019	Amit Rastogi
Karnataka	Anekal	Sri Venkateshwara Communications	# 37, KSRTC COLONY, HOSUR MAIN ROAD,ANEKAL TALLUK, BANGALORE - 562106	320078	RJaganath
Karnataka	Bagalkote	Turning Point Computers	Opp. VRL Booking point, near Engg college BEC road, Vidyagiri, Bagalkote	329510	B.M. Hiremath/ Veeresh
Karnataka	Bailhongal	3G Communication	Shop No 459/2 Near Inchal Cross Belgaum Road Bailhongal-591102	9343815097	Vishwanath
Karnataka	Bangalore	Ascent Communication	No:113, St Johns Church road, Bangalore - 560005	32914856	Kumaresan
Karnataka	Bangalore	Insta Service Point	NO:64,Mission road, SATHI COMPLEX, BANGALORE-27	22107560	Venkatesh
Karnataka	Bangalore	Optima Mobile Services	24/2,Dr.Rajkumar Road, Near Subramanyanagar Police Station, 2nd Block, Rajajinagar, Bangalore - 560 010	23131953	Umri Krishnan

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Karnataka	Bangalore	Optima Mobile Services	P-3, Mallikarjuna Complex, Opp R T Nagar Police Station, 80 Feet Road, R T Nagar, Bangalore-560032	32710202	Madan
Karnataka	Bangalore	Pranav infocom	No 102, Surya Mansion, 7th Main, 4th Block, JAYANAGAR, BANGALORE -560011	9343023209	S.V.Sirish
Karnataka	Belgaum	Hello India Telecom	G-4,Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum - 590 001.	2420533	Mohan
Karnataka	Bellary	Shri Vinayak Electronics	# C1, R.K. Complex, KC Road Bellary-583103	655043	Devandra / Richard
Karnataka	Bhadravati	Digital communication	SR Complex 4th cross B H Road Bhadravathi-577301	9341081291	Nagabushan
Karnataka	Bhatkal	Vijay Communication	Hussian Complex Bunder road Bhatkal - 581320	329327	Vittal H.Naik
Karnataka	Bidar	Mayuri Infotech	Ravi complex,shop no: 4,Udgir road,Bidar-585401	225544	Ravi Halhali
Karnataka	Bijapur	Turning point computers	Khed building,opp Vijaya college, Sholapur road, Bijapur-586103	329318	S.M.Hiremath
Karnataka	Channarayana	C&C Technology	"Ramanujam Nilaya" No.2104, 11th Cross, Kuvempunagar B M Road, Channarayana - 571501	324222	Charan
Karnataka	Chikaballapur	Sri Ram Prasad Enterprises	Post office road Chikaballapur-562101	329579	Vardharaj / Ram prasad
Karnataka	Chikmagalur	Cell Tec Electronics	ragavendra complex, NMC circle,Neharu road, Chikmagalur - 577101	9341013183	Prem kumar
Karnataka	Chintamani	Amrutha Mobiles	Gajanna Circle Chintamani - 563125	9342262811	Sudarshan Reddy
Karnataka	Davangere	Kruthika Communication	Shop No: 6, Park View Plaza, (Income Tax Office's Ground Floor) , 4th Main, Near Vishweshwaraiah Park, P.J. Extension, Davangere-577002	395444	Sujay
Karnataka	Doddaballapur	Santosh Communication	VITOBHA TEMPLE ROAD, OPP ASHWINI HOSPITAL, DODDABALLAPUR -561203.	9341756645	Santosh
Karnataka	Gadag	Tranqui Telecom Service Pvt Ltd	Shop No12, Siddalingeshwar Complex Below SBM. Station Road,Gadag District Gadag-528101	576998	Raju / Zakir
Karnataka	Golak	Cell World	Basaveshwara circle opp-court Golak - 591307	93438-73777	Shivanand / Chougala
Karnataka	Gulbarga	Aishwarya Communication	C-9, Asian Plaza S.V.P.Chowk Main road Gulbarga-585102	329447	Mallikarjun
Karnataka	Hassan	Sree Digital Solutions	1380 Mission Hospital road opp Hindibei college - 573201	329481	Vidya Shankar
Karnataka	Hosakote	Emposys Communication	Shop no 1, Mahalatha Devi Complex M V Badavane, College Road Hoskote-562114	652532	RaghuNandan
Karnataka	Hubli	Shruti Services	shop no : B6, Laxmi complex, Court circle , Hubli- 580020	3290671	Mahendar
Karnataka	Hunsur	Sriram Infocom	No.6, Municipal complex, H.D.Kote road circle - 571105	253699	HHPradeep
Karnataka	Kadur	Ashwa Tele Mobiles	TB Road Kadur -577548	9341033310	R.Ananda Murthy
Karnataka	Kanakapura	Sumukh Communications	Harshitha Complex, Budikere, Bangalore main rd, Near KSTC Bus stand Kanakapura-562117	9342743344	R.C.Harish
Karnataka	Karwar	Mithun Tele Solution	Prema complex Civil court road opp SBM Karwar -581301	9341199222	Mithun palyunker
Karnataka	KGF	Global Net Communications	Opp. King George Hall, Geetha road Robetson pet, KGF - 563122	329559	Shiva Kumar

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Karnataka	Kolar	Seamatrix	No.384.Suguna complex, Near KSRTC bus stand, Anthargange road, Kolar 560101	2228714	Shetty
Karnataka	Kumta	Krishna Mobiles	958, College road, NH 17, opp RWW, Kumta - 581343	329607	D.V.Prabhu
Karnataka	Kundapur	Reya Mobiles	Vaishali complex I flr Shastri circle, Kundapur - 576201	320866	Anantha / Ramya
Karnataka	Madikeri	C.M. Communications	Shop no. 8, M A Complex 1st flr Kohinoor rd Madikeri	9343837555	Mohamad Sharief
Karnataka	Mandya	C & C Technology	2068, First Cross, Krishna Krupa Nilaya Subhash Nagar, Mandya-571401	320777	Charan
Karnataka	Mangalore	Innovative Infocom	15-10-537/11, Jayavarma Centre, Mallikatte Circle, Kadri, Mangalore - 575002.	6563244	Sebastian Fernandes
Karnataka	Moodabidri	Media Guard Technologies	Rajeev Gandhi complex main road Moodabidri	325909	Vishwas Kumar
Karnataka	Mysore	K.K.Marketing	1432/9, Tribhuvan Towers, opp Veterinary Hospital, Dewan's Road, Dhanwantri Road Cross, Mysore -570001	4258613	Karunakaran.
Karnataka	Nipani	Manusoft Computers	Dumale Complex Chikodi road Nipani - 591237	9448148005	Mahesh Dumale
Karnataka	Raichur	Akshay Electronics	1st floor, hotel UMA complex, station road, Raichur - 584101	329673	Narasimhu
Karnataka	Ranibennur	Kruthika Communication	LIC Building Opp to Gupta Petrol bunk PB road Ranibennur-581115	231444	Sujay
Karnataka	Shimoga	Chetan Electronics	C-5, Kenchappa complex, Durgiddi main road, Shimoga-577201	9343370193	Panduranga rao / Binoy
Karnataka	Tiptur	Shree Digital Solutions	Nanjappa complex, opp city union bank, BH road, Tiptur - 572201	9343813731	Vidyashankar
Karnataka	Tumkur	Durga Communication	No.14 CMI Complex, opp Jayadeva Hostel, B.H.Road - 572101	2256184	Naveen Kumar
Karnataka	Udupi	Sanman Mobile Services	Shop No: 15, Simaz complex, Diana circle, Court road, Udupi- 576101.	3955770	Prakash
Kerala	Alappuzha	GETRONICS	FIRST FLOOR, KARTHIKA BUILDING, OPP SDV BOYS HIGH SCHOOL, COURT ROAD, ALLEPPY.	3290446	OMPRAKASH
Kerala	Alathur	MARSTEK	12/950, Ground Floor, AR Complex, Opp. Munsiff's Court, Alathur, Palakkad Dt.- 678 541	04922-321311	Mr. Rajesh. V.
Kerala	Aluva	SED INFOSYS	BUILDING NO 12/57 DOOR NO 8, FIRST FLOOR, POOTHULLIL BUILDING, ALUVA - 683 101.	3235599	Sudheesh
Kerala	Attingal	AM Technologies	Mamam, Near Dreams Theater, Attingal	3290301	Saji
Kerala	Badagara	Amarkish Communications	1st Floor, Sarala Complex, Near KVR Motors, N.H. Bypass Road, Nut Street, Vadakara-673101.	0496 - 3255756	Mr.Jeeju / Mr. Bajju
Kerala	Cherthala	Cherukattu Phones	Krishna Building, Opp govt boys high school, AC road, Cherthala	9388441434	Mahesh CD
Kerala	Ernakulam	TELETECH SYSTEMS	20, First Floor, Penta Estate, above Airtel office, Janatha Junction, Palarivattom, Cochin-25	3207554	SONY THOMAS
Kerala	Ernakulam	Zenicon Infocom(P) limited	Above Syndicate Bank, Opp Cochin Shipyard, M.G.Road, Cochin-15	2359511	Jaimon Joseph
Kerala	Ernakulam	Guidelines	Ground Floor, Mundukottakkal Estates, Kadavanthara, S A Road, Cochin	4000113	Manoj G
Kerala	IRINJALAKKUDA	NICE MOBILES	NICE BUILDING, ST. JOSEPH'S COLLEGE JUNCTION, IRINJALAKKUDA - 680121	0480-3291515	MR. SEBASTIAN

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Kerala	Kalpetta	Mobi Care	Apasara Building, Near Municipality Office, Main Road, Kalpetta	04936-329366	Thanseer
Kerala	Kanhangad	Xn COMPUTERS & DATACARE	BENGACHERY COMPLEX, OPP.VYAPARA BHAVAN, T B ROAD JN, KANHANGAD.	0467-3259755	Mr.SANDEEP
Kerala	KANNUR	SAHAR COMMUNICATIONS	SB-666-C & D, PRESTIGE CENTRE, GROUND FLOOR, SUB REGISTER OFFICE ROAD, KANNUR.	0497-3258585	AJAI ABHIRAM
Kerala	Karunagapally	Supreme Enterprises	Valityth Plaza, Opp to KSRTC Bus stand,Karunagapally	2620282	Mr. Ratish/Prem
Kerala	Kasargode	Xn COMPUTERS & DATACARE	BENDICHAL COMMERCIAL COMPLEX, PRESS CLUB JN, MG ROAD, KASARGOD.	04994-324755	Mr. SANDEEP
Kerala	Kollam	Digital Infosystems	MC-3087, New Block, Bishop Jeromi Nagar, Chinnakada, Kollem-691001	2760647	Johnson Lawrence
Kerala	Kottarakkara	Sivashakthi Communications	KP II/1574, Vallyavila bldg, Near Marthoma Girls high school, Pulamon PO, Kottarakkara	3298191	Suresh
Kerala	Kottayam	SVM Technologies	M.P.M COMPLEX, Near Popular Maruti Show Room, M.C ROAD, S.H MOUNT,KOTTAYAM, KERALA- 686 006	2565303	Rajesh K S
Kerala	Kozhikode	Domain Infosystems	1st Floor, Al Fahad Complex, Saba School Cross Road, Near Corporation Stadium, Puthiyara, Kozhikode-673004	0495-2722222, 0495-3243745	Mukundan
Kerala	KUNNAMKULAM	V STAR MOBILES	ROOM NO 4/ VIII/1039, CITY COMPLEX,OPP TEMPO PARK, TOWN HALL ROAD, KUNNAMKULLAM.	04885-320009	VIJLJMON.K.V.
Kerala	Marjeri	Integrated Computer Systems	Royal Tower, TB Road, Marjeri - 676121	0483-3299686	Mr. Thomson Chacko
Kerala	Mavelikara	Ettutharayil Agencies	GROUND FLOOR, KOIPPALLIL ROYAL ARCADE, PUTHIYAKAVU, MAVELIKARA	3293340	Biji
Kerala	Palai	Cyriac Tv Plaza	Vypana Building,Petta Road, Palai.	329746	Tom Cyriac
Kerala	Palakkad	Benravs International	12/310/6, Ground Floor, Mero Complex, H.P.O.Road, Palakkad - 678 001.	0491-3052002	Mathews
Kerala	Pallakad	ORION TECHNO SOLUTIONS	12/310/15 FIRST FLOOR, METRO COMPLEX, HEAD POST OFFICE ROAD, PALAKAD-678001	0491 - 3200255	KHAJA HUSSAIN
Kerala	Pathanamthitta	Melamparambil Agencies	10/264, Main Road, Town,Pathanamthita	2223132	M.V. Francis Oommen
Kerala	THALASSERY	SAHAR COMMUNICATION	44-1929, MACKSON MONOR, OPP. PARIS RESIDENCY, LOGANS ROAD, THALASSERY	0490 - 3208585	AJAI
Kerala	Thiruvalla	Sangeetha Electronics	524/17, Central Tower, Cross Junction, Thiruvalla	3203000	Ranjeev Kumar
Kerala	Thiruvananthapuram	Appolo Systems	Thelangu Chetty Complex, Shop No 23-24, Kalpalayam JN Karamana, Thiruvananthapuram 695 002.	2340523	Santosh
Kerala	Thiruvananthapuram	Smart Mobile	TC 2/3554(5), First Floor, Opp. Petrol Pump, Kesavadasapuram, Trivandrum-695004	3200105	Krishnakumar P B
Kerala	Thodupuzha	National Electronics	Shop No 5, Aswathy Shopping Complex, Temple Junction, Thodupuzha	220320	Aneesh M A
Kerala	Thriprayar	Nice Mobiles	382j, 1st Floor, Century Plaza, N.H.17, Near Bus Stand, Thriprayar-680567	0487 - 3240400	T.P. Sebastian
Kerala	Tirur	Telit Telecom Shop	GROUND FLOOR, AL AMAL COMPLEX, PAN BAZAR, TIRUR	0494 - 3295623	Vasan.K.Nair

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Kerala	TRICHUR	CELL TECH	SHOP NUMBER 5B,TC23/526, N.P. TOWER, GURUVAYOOR ROAD, WEST FORT, Thissur	0487-2387386	SANTOM KALLOOR
Kerala	Vaikom	VAIKUNDAM ELECTRONICS	II/ 214C, Mannameriel Complex, Bus stand Road, Valtiyakavala, Vaikom	326616	Sreekumar.G
Madhya Pradesh	Balaghat	Shri Computers	Keshar Plaza Complex, Hanuman Chowk, Balaghat	9300632132	Mr. Deepak Bajaj
Madhya Pradesh	Betul	Shivam Electronics	Jiaprakash Chowk,Kothi Bazar, Auto Stand, Betul - 460001	9329099071	Mr.Vikram Motwani
Madhya Pradesh	Bhopal	Akasha Enterprises	25-26 , CENTRAL MARKET, ROSHANPURA SQUARE, BHOPAL MP	7553201626	Mr. Dinesh Asija
Madhya Pradesh	Bhopal	Neha Sales Corporation	F-104, Anmol Tower, E-5/14, Commercial Zone, Arera Colony, Bhopal-462016	7553015088	Mr.Ashok Hirwani
Madhya Pradesh	Bhopal	MUSIC MAHAL BHOPAL	SHOPNO.1 NEW MARKET NEAR HANUMAN MANDIR, BHOPAL	0755-5220725/ 2579178	Mr.SHINJU
Madhya Pradesh	Bhopal	GSM SOLUTION-BHO	M-2 CHETAK COMPLEX, ZONE -2 M.P NAGAR, Bhopal	07373-316816	Mr.NEERAJ
Madhya Pradesh	Biaora	MOBILECARE-BIAORA	KR Complex Rajkand Road, Biaora. M.P.	07373-316816	Mr.Atul Sharma
Madhya Pradesh	Chindwara	Bunty Photoelectronics	Shop No.33, Jji Bai Complex, Parasia Road, Chindwara	07162-230558	Mr.Ritesh Shukla
Madhya Pradesh	Dewas	New Taj Electronics	New Taj Electronics, 4, New Market, Moti Bunglow Main Road, Dewas	07272-220005, 406006	Mr.Shabbir Shaikh
Madhya Pradesh	Guna	Mobile Junction	Jai Stambh Chauraha,Nr.Central Bank, Guna-473001	07542-329277	Mr.Deepak Arya
Madhya Pradesh	Gwalior	Galav Computers	Ground floor ,Ganpati Plaza , City Centre , Gwalior	0751-4013311	Mr.Pradeep Dhiit
Madhya Pradesh	Gwalior	YERSHA SALES & SERVICE-ASP	GROUND FLOOR SARAFI BAZAR LASHKAR,GWALIOR	0751-4060444	Mr.AJIT KUMAR
Madhya Pradesh	Indore	Aparna Electronics	UG 11 , B M Tower , Sapna Sangeta Road , Opp. Lotus, Indore	7313207283	Mr.Nitin Kulkarni
Madhya Pradesh	Indore	Ayushi Electronics	UG-10,Ratnamani Complex, 7/1,New Palasia, Indore-452001	0731 - 3251284	Mr.Santosh Daivedi
Madhya Pradesh	Indore	PIONEER MARKETING	224, Prem Trade Center, Maharani Road, Indore.	0731-4006503	Mr.Ritesh
Madhya Pradesh	Indore	IT CUSTOMER CARE-IND	LG-13, TRADE CENTRE,18,SOUTH TUKOGANJ, INDORE	0731-4207487	Mr. Sanjay Dhankar
Madhya Pradesh	Itarsi	S.S. Telecommunications	Vijayshree Complex 5, Line Sarafa Bazar, Itarsi - 461111	9300272505,	Mr.Aklesh Saxsena
Madhya Pradesh	Jabalpur	Sri Sai Communication	C/O MUSKAN CARD GALLERY, 766, SHAHID SMARK MARG, NEAR RANITAL SQUARE, JABALPUR-482001	0761-4046831	Mr.MOHIT SAREEN
Madhya Pradesh	Jabalpur	I T SOLUTION	GROUND FLOOR,ASTHA APPARTMENTS.WRIGHT TOWN, Jabalpur	0761-4014064/ 4064370	Mr.SANJEEV CHOUIBEY
Madhya Pradesh	Katni	Excellent Infosys	20/306, Gurunanak Ward, Katni	07622 406047	Mr.Prafull Agrawal
Madhya Pradesh	Khandwa	NAMAN REFRIGERATION-KHANDWA	TAPAL CHALL,KHANDWA	0733-2230089	MR.YASHWANT MALI
Madhya Pradesh	Mandsaur	Sky Link Mobile Services	Payas Ice Cream Parlour, 16, Opium Godown Road, Nai Abadi, Mandsaur 458001 (M.P.)	07422-243978	Mr.Gaurav B. Mittal
Madhya Pradesh	MORENA	MOBILE PLAZA	M S ROAD , JIWAJI GUNJ , OPP BANK OF INDIA, MORENA	07532 400886	Mr.T C SHIVHARE

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Madhya Pradesh	Nemuch	Shree Balaji Mobiles	Jain Bhavan Road, Near Ganganagar Off., NEEMUCH (M.P.)	07423-320053	Mr.Savesh Goyal
Madhya Pradesh	Ratlam	Kirti Telecom	124 Station road Opp.Raj Tower, Ratlam - 457001	239346	Mr.Kirti Jain
Madhya Pradesh	Sagar	Neeta Computers	Jama Complex, Teen Batti, Sagar - 470002.	07582-329951	Mr.Ramesh Gupta
Madhya Pradesh	Satna	Maa Sharda Communication	Gali No1, C/o Shri Gopal Sharan Singh, Pushp Raj Colony, Satna	7672320797	Mr.Prashant Singh
Madhya Pradesh	SATNA	AKASHWANI AGENCES-SATNA	OPP.CMA SCHOOL,SHOP NO.2,ANNAM CHHAYA, REWA ROAD, Satna	07672-416455	Mr.Ajay Sukhramani
Madhya Pradesh	Shivpuri	Ocean Computer Corporation	1st Floor, Vishnu Mandir Market, Near Panipat Handloom, Shivpuri	07492-225505	Mr.Sameer Savena
Madhya Pradesh	Ujjain	Galaxy Computers & Communication	43/2, Varruchi Marg,Opp Madhav Nagar Police Station, Freeganj, Ujjain	0734-2515995, 2530777	Mr.Anurag Chhajlani
Maharashtra	AHMEDNAGAR	T V SPOT	B-3, ADARSH SAMRUDDHI, NR. CHOUPATI KARANJA 414001	0241-2326267	MR ANIL APTE
Maharashtra	Akola	Supra Computers	Ushakiran Complex, Shastri Nagar, Opp. Hotel Surya, Akola.	9326866469	Mr.Prashant
Maharashtra	Amravati	Scorpio Services	Shop No. 84, Ground Floor, Gulshan Towers, Nr. Panchasheel Cinema, Amravati, Pin-444601	0721-2567302	Mr. Pramod
Maharashtra	Aurangabad	Unique Telematics	Shop no.108/B, Behind Sajawat Handloom, Tapdya Super Market, Nirala Bazar, Aurangabad-431001	0240-2356447	Mr.Mazhar Ahmed Shaikh
Maharashtra	Aurangabad	Electronics World	Sahyadri Building,opp. To Shivaji School,Khokadpura, Aurangabad-431001.	0240-3296998	Mr. Rauf
Maharashtra	Beed	Shree Enterprises	Behind Raj Hotel, A.H Wada Vachralay Road, Beed-431122.	02442 231831, 02442-228855	Mr. Rahul Joshi/ Mr. Ravij Joshi
Maharashtra	BHIWANDI	VARAD ELECTRONICS	SHOP NO.2, PRABHU CHAYA BLDG, PRABHU ALI, NEAR OLD GOVT. HOSPITAL, MANDAL, BHIWANDI, DIST THANE	02522- 222653	Mr. Hitendra Zope
Maharashtra	Chalisgaon	Mobile Point	Shop-22, Momaya Complex, Near Bus Stand, Chalisgaon	02554-309996	Mohd. Israfil Ansari
Maharashtra	Chandrapur	Crystal Services	Behind Hotel Simran, Jatpura Gate Chandrapur	9370273776	Mr. Mahmood
Maharashtra	Chandrapur	Shiv Communications	Ramnagar, Near Durga Mata Mandir, Sindhli Colony, Chandrapur	329546	Mr.Mahesh
Maharashtra	Chinchwad (Pimpri)	Ritz Communication	Shop No 10,'A' wing,Jai Ganesh Vision,Next to Hotel Neelkanth,Near Fam Multiplex,Akundi, Pune-411033	020-27485613, 020 32661900, 09371029777	Ms Nikita
Maharashtra	Dhule	Pearl Communications	Below Reliance WebWorld Express, CKB Arcade, Nr Deopur Bus Stand, Dhule.	02562-324666	Mrs. Sonu Atul Bang
Maharashtra	Gondia	M/s VZ Care	Opp. Cofee house, Railtoft, Gondia 441614	329322	Mr. Krishna Sargam
Maharashtra	Hatklangale (Ichalkaranji)	Sai Vision Services	11/236 MOHAN ARCADE SHOP NO B14, STATION ROAD, TAL-HATKANGALE, CITY-ICHALKARANJLI-416115	0230-2439989	Sameer Bhonsale
Maharashtra	Islampur	Solar Shopyy	opp Sai Motor Driving School, Nr Stand Road, Islampur, Distt Sangli, ISLAMPLUR-415409	9326777603	Mr. D.H.Patil
Maharashtra	Jalgaon	Global Enterprises	E-81, 1st floor, Golani Market, Jalgaon -425001	0257-2236899	Mr. Pramod
Maharashtra	KALYAN	SKY LARK ASSOCIATES	Shop'1, 'A' Wing, Suresh Tower Co-op. Hsg. Soc. Opp. Municipal Vegetable Market, Santoshi Mata Road, Kalyan (W)	0251-3209899	MR. NASEER

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Maharashtra	Kolhapur	SMS Services	55, Diwan Tower, Opp. Nutan Marathi School, Near Mirajkar Tikky, Kolhapur, Pin -416005.	0231-2541120, 9326226120	Prakash Patil
Maharashtra	Kolhapur	KOMAL ELECTRONICS	517/10 "SAWAI" SHIVAJI PARK,NEAR VIKRAM HIGHSCHOOL,SHIVAJI PARK KOLHAPUR-416001	0231-2521424, 09823517055	MR. VASANT P. BODAKE
Maharashtra	Kopergaon	Om Sai Mobile	Opp. ST Bus Stand, Daharngaon Road, Kopergaon, Dist Ahmednagar.	02423-226463	Mr. Mahendra Devkar
Maharashtra	Latur	HINDUSTAN MOBILES SERVICES	Shop No.47/59,Site 110, Gandhi Market, Nr Bhalchandra Blood Bank, Main Road, Latur-413512	02382-641111, 982345500	Mr. Sandeep Parande
Maharashtra	Malegaon	Cell Care	Shop No.14, Beside Sana Travels, Bunkar Bazar, Qidwai Road, Malegaon - 423203.	937020819	Mr Ansari Mohd Israfil
Maharashtra	Mumbai	Absolute Networks	A007, Vishal Shopping Centre, Next to Vishal Hall, Near Station, M.V.Road, Andheri (E), Mumbai - 400 069	022 32544800	Mr. Anun
Maharashtra	Mumbai	Creative Solutions	SHOP NO 6 AMBIKA COOPERATIVE HOUSING SOCIETY, JAWAHAR NAGAR ROAD NO 2 NEAR RAILWAY CROSSING,GOREGAON WEST, MUMBAI 400062	022-28769003	Mr. Anand
Maharashtra	Mumbai	CYBER-CYAN CONVERGENCE & SERVICES (INDIA) PVT.LTD.	43/44, Gold Filled Plaza, Sion Bandra Link Road, Sion, Mumbai-400017	022-24075939	Mr. Jatin Parekh
Maharashtra	Mumbai	G.P.ELECTRONIC	A/27, Gr. floor, Sagar Tech Plaza, Andheri-Kurla Road, Saki-Naka, Andheri (E), Mumbai 400072	2232633960	Mr. MAYUR
Maharashtra	Mumbai	Grace Tele Services	Shop no 3, C/1, Manik Nagar Soc, Purjabi lane, Borivali (W), Mumbai 400092	022-32455033	Mr. Daniel
Maharashtra	Mumbai	Komplex Telecom Corporation	Shop no.A/19, Nootan Nagar Premises Co. Op. Hsg. Society, Near Bandra Rly. Stn., Towards Bandra Talav, Turner Road, Bandra (West) Mumbai	022 64147153	Mr. Haque
Maharashtra	Mumbai	LG Service Centre	Shop No.1.2.3 Ground Floor, Rajakamal Bldg.Opp.Ram Mandir, Subhash Road, Vile Parle(E) Mumbai 400 057	022-26134917	MR. RAKESH / OMKAR
Maharashtra	Mumbai	PARAS TELECOM	2nd floor, Rear Side Capital Cinema Building, Wauddy Road, Opp. Mumbai CST Railway Station, Mumbai	022 32022228	Mr. Ganesh
Maharashtra	Mumbai	Sai Tele Services	A-110, Satyam Commercial Complex, M.G.Road, Ghatkoper (E), Mumbai - 400 077.	022-40111264	Ms. ISHA
Maharashtra	Mumbai	Yash Telecom	Dadarkar Tower, Shop no.1, Opp.Film Centre, Near Crossroads, Tardeo, Mumbai - 400 034	9324049698	Mr.Grish
Maharashtra	Mumbai	TERABYTE	Shop 27, Vikas Paradise, Bhakti Marg, Off L.B.S. Road, Near R Mall, Mulund (W), Mumbai 400080	022-32640045	Mr. Chirag
Maharashtra	Mumbai	Trident Communications	8-A,Vasant Smruti, Dadasaheb Phalke Road, Beside "BharatKshetra Building", Near Dadar station(E), Dadar -East, Mumbai - 400 014.	9323960027	Mr. Kalpesh
Maharashtra	Mumbai	Sierra Mobiles	Opp Prabhu Darshan, L.J.Road, Shivaji Park, Near Shiv Sena Bhavan, Mumbai 400016	022 24382200	Mr. Anurag
Maharashtra	Nagpur	Epoch Services	"Shope No. UC-9, Bhakati Vihar Complex, Chapru Nagar Square, Lakadgarj, Nagpur -440008"	0712 3246777	Mr. Grish

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Maharashtra	Nagpur	Spectrum Marketing	Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth , Nagpur - 440010	712-22527823	Ms. Sonali
Maharashtra	Nagpur	Shivatronics	B-31 Sai Regency Complex Ravi Nagar Square Nagpur Maharashtra 440044	9300892579	Mr. Ravi Gupta
Maharashtra	NANDED	DEVANSH MICROTRONICS	.opp forest office, nr Ranbhikar's residence -Nanded-431602	02462-249789	Mr. Prashant Palnate
Maharashtra	Nanded	ROYAL UNIQUE SERVICES-NANDED	Plot No-48,Krishna Kamal , Opp. Sunil Furniture, Bhagya Nagar road, Ashok Nagar Nanded-431605	2,462.262,419	Mrs. Sunita Ashish Naik
Maharashtra	Nasik	Mobs Associates	Shop No. 8a, First Floor, 'Kapote-Meher' Market, Renuka Nagar, Wadala Naka, Dawrka, Nasik - 422 001.	0253-6523613	Mr. Mahesh
Maharashtra	PANVEL	Oceanic Tele System	Shop No. 3, Sai Arcade, Sector 15, New Parnel (E),Dist. Raigad.	9322217221	Ms. Swapnaja
Maharashtra	PEN	SKYPHONE ENTERPRISES	SHOP NO 3, SHREE COMPLEX, OPP UNIQUE BAZAR, PEN KHOPOLI ROAD, PEN, DIST RAIGAD-402107	9373435000	MR KULDEEP
Maharashtra	Pune	MICROCHIP SOLUTIONS	Akshay Chambers 216 Naryan Peth,Near Bhide Bridge, N C Kelkar Rd. Pune-411030	020-24471155, 9823905949	Mr Mahyesh Bhosale
Maharashtra	Pune	Horizon	32A, Lotus Court, Near Hotel Panchami, Pune Satara Road, Pune.	02032501222, 9325002399	Mr. Nilesh Pundye
Maharashtra	Pune	Mobile World	G-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PUNE-411 001	30942268, 9325088055	Pawan Mantri
Maharashtra	Pune	Wiki Info Technologies	Shop No4, Amit Complex,474, Sadashiv Peth,Opp New English School, Tilak Road Pune Maharashtra	020 24434134, 932206664.09 371829891	MR.VIVEK SURVE
Maharashtra	Ratnagiri	S P ELECTRONICS-PUNE	shop no-19, Parasmani Complex, K C Jain Nagar, Nr Maruthi Mandir, Ratnagiri-415612	02352-329556, 221982, 9823317158	MR. SANTOSH PRABHU
Maharashtra	Sangamner	Rajpal Telecom	Yashodhan complex,New Nagar Rd, Near hotel Chaitali, Sangamner	02425320888	Mr Harish Rajpal
Maharashtra	Sangli	Ramesh Electronics	Opp. Kanya Purohit prashala, Rajwada, Sangli-416416	0233-2327601, 9823085176, 09372107601	Suresh Shegane
Maharashtra	Satara	Shivlal Mobilink	173/6/7 Raviwarpath shop no-11, Vithal Lila Complex, Powai Naka, opp Janita Bank, Satara-415002	02162-325212	Mr. Mahesh Shinde
Maharashtra	Shirampur	Siddharth Infocom	Shop No 1, Hotel Sidhartha Building, Sidhartha Stop, Sagamner Road, Shirampur-413709	02422-222117, 02422-329530	Mr. Kedar Fargade
Maharashtra	Solapur	ATHARVA ELECTRONICS PUN	940/2 NORTH SADAR BAZAR, GARUD BUNGLOW, SOLAPUR-413003	0217-2317955, 9823317081	MR. UMESH KAMALAPURKAR
Maharashtra	Solapur	Jawaharlal Radio Service	184, Gold Finch Peth, nr Hotel Ritesh, Solapur - 413007.	0217-2725030	Prasama J Chavan
Maharashtra	Thane	Umi Enterprises	G. F. Abhiman II , Opp. Forest Office, Teen Hath Naka, Thane (W)	022 65928384	Mr. Rinklesh Panchal
Maharashtra	VASAI	E-Link Solutions	Shop No.5, Type C, Bldg no.5/6, Shanti Vihar, Mira Road -E, Pin Code : 401107.	9322839386	Mr. OMKAR

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Maharashtra	VASHI	BEEKEYEN ENTERPRISES	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	022-65114304	Mr. Shailesh
Maharashtra	VASHI	LG Service Centre- DAKC	H Block, Ground Floor, Dhirubhai Ambani Knowledge City, Navi Mumbai-400709	022-30386032	Mr. Rajnish
Maharashtra	VIRAR	Siddhivinayak Tele Services	Shop no 5&6, Vishnu Prasad Complex, Opp Utarksha School, Near S.T. Bus stand, P.P. Marg., Virar (West) Pin 401305.	0250-3258111	Mrs. Yogita Kadam
Maharashtra	Wardha	Libra Electronics	Opposite to LIC office,Arvi Stand Main Road, Wardha :- 442001	245286	Ms. Manjusha
Maharashtra	Yavatmal	Star Electronics	Near Shyam Talkies Ram Mandir Road Yavatmal Maharashtra 445001	2324106	Mr.Snajay Chabda
Maharashtra	Yavatmal	Combine Electronics & Services	Shop No 13, 1st floor, Old Indra Gandhi Market, Azad Maidan Road, Yavatmal-445001	9822200166	Mr. Ajay Shukla
Maharashtra	Yeotmal	I T Services	Nr datey college,C/o Yahoo cyber cafe, Yawatmal 445001	9372610121	Mr. Umeh Gadwe
Orissa	Anugul	Creative Solution	Hanuman Bazar, Near gundicha mandir, Angul-759122	06764-329207	Mr Tapas Sahu
Orissa	Balasure	Raghnath IT Solutions	Azimabad, Proof Road, Balasure-756001	06782-329267, 9337669107	Mr. Sujit Kr Sen
Orissa	Berhanpur	Global Electronics	Gandhi Nagar, 1st Lane, Berhampur.	0680-2235124	Mr. D.B.Nepak
Orissa	Berhanpur (Orisa)	RASHMI ELECTRONICS & COMPUTERS	Shop No.19, Sai Complex, Main Road, Gandhi Nagar, Berhampur, Orissa	0680-3290409	RASHMI RANJAN SHARMA
Orissa	BHADRAK	A B Associates	Nr.Reliance Web World Express, Bypass Road, BHADRAK-756001	9337040450	Kartik Chandra Rout
Orissa	Bhubaneswar	Miracle Services IT Extn.	Plot No. 136, Fr. Lane of Vigilance Office, Beh. Passport Office, Surya Nagar, BBSR.	0674-2390461, 2391533	Mr. Chaco/ Suprava
Orissa	Bhubneswar	S.A.INFOSYS	291.Bomkhal, Opp.Akamra cinema hall, Bhubaneswar-751010	0674-2573114	Ashwini k saho
Orissa	Cuttack	O.A.INFOTECH	Behind Govt Bus Stand, Badambadi, Cuttack -753012	9338912613	Arabind Rout Ray
Orissa	Jajpurroad	Smruti Infotech	Dala Chhak, Jajpur Road, Jajpur	06726-324529	Mr Sumit Ranjan Nayak
Orissa	PURI	Bajjnath Infocomm	At Muncpal Mkt, Grand Road, Puri-752001	9337032005	Mr.Ajay/ Sandeep Agrawal
Orissa	Rourkela	Infosys	13.Bisra Road,subhadra complex Opp.Choudhary Petrol Pump, Rourkela	9337403999	Arun Ghosh
Orissa	Sambalpur	A.N.Communication	Inf. Of Zilla School, Pensionpara, Sambalpur-768001	9337660919	Mr. Md. Abdul Aziz
Punjab	Amritsar	Bajaj Telecommunication	87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001	9814650314	Suman Bajaj
Punjab	Barnala	Unique Infotech	Mittal Street, Near M C Office, Barnala-148101	01679-238007	Parikaj Goyal
Punjab	Batala	New Krishna Entrepriese	Circular Road, Near Shekhari di Kothi, Batala	1871-396612	Navin Handa
Punjab	Bathinda	Lall's Electronic Gallery	1139-A, First Floor, Amrik Singh Road, Nr Gole Diggi, Bhatinda	0164-2239500, 2236337	Ashok Kakria
Punjab	Chandigarh	Vignesh Services	S.C.O- 189-90, Sec- 34, Chandigarh	0172-3018028	Mukesh Arya

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Punjab	Chandigarh	New Tech	SCO 495/496 SEC 35C First floor	9814244862	Mr Pawan
Punjab	Gurdaspur	S K Electronics	Ajit Singh Market, Batala Road, Nr. Petrol Pump, Gurdaspur	01874-329906	Mr. S.Sukhvinder
Punjab	Hoshiarpur	Kuldip's Mobile Care	Dhobian Wali Gali,Phagwara Road, Hoshiarpur-	01882-226906	Kuldip
Punjab	Jalandhar	Mobile Center	233/1, Saheed Udham Singh Nagar,Backside Hotel Preet, Nakodar Road, Jalandhar-144001.	0181-3292666	Vikas Sangar
Punjab	Kapurthala	Arun Electronics	217,C Block,Jama Masjid, Shopping Complex-144601	01822 329254	Arun Khosla
Punjab	Kotkapura	OM MOBILE SERVICE CENTRE	15T FLOOR DHANU RAM PANSARI , Railway Road-151204	1635-223069, 9815759239	ROHIT MITTAL
Punjab	Ludhiana	Shahi Communication	Shop No.5, 4X International, 583 L, Model Town, Ludhiana	0161-3244190	Amit Shahi
Punjab	Ludhiana	Anant Shree Comp	19K Opp PAU Gate no 1 Ferozpur Road	0161 - 3245386	Ms Monia
Punjab	Malaut	KHURANA MOBILE SOLUTION	SHOP NO 7 OPP, NEW TELEPHONE EXCHANGE G T ROAD MALLUAT PIN NO - 152107	9316940003	RAMESH KHURANA
Punjab	Meer Kotla	Prime Infocomm	Opp. Main gate,Govt College, MeherKotla-148023	9317731979	Rohit Bansal/Raj Verma
Punjab	Mandi Gobindgarh	Aditya Infocom	Main Iron Market, Mandi Gobindgarh	9316320490	Naresh Aggarwal
Punjab	Mansa	Sharma Telecom	OPP.PARKASH BOOK DEPOT,NAGINA MARKET, MANSA	9316173009	Udesh Kumar Sharma
Punjab	Moga	Rashpal Telecom	6, Red Cross Road, Court Road, Near Old Court, Moga-142001	01636-222468	Mr. Rashpal Singh
Punjab	Nabha	Echo Telecom	Opp. Milan Palace Circular Road. NABHA 147201	01765-329244	Girish Garg
Punjab	Nawashar	Kapoor Electronics	Kothi Road, Opp Kumar Hotel, Nawashahr-144514	01823-509739	Narender Pal
Punjab	Pathankot	Touch InfoSys	189 Opp. Guru Nanak Park, Model Town, Pathankot.	0186-3290500	Mr.Navdeep Singh Bedi
Punjab	Pathankot	Leo Comp	Near Tourist hotel, military ground, Pathankot	9814586406	Mr Kamal
Punjab	Patiala	Image Services	84, First Floor, Leela Bhawan, Patiala-147001	0175-2222796, 9872281524	Rohit Bansal
Punjab	Phagwara	Bansal telecom	G T Road,Railway Road Chowk, Phagwara-144401	01824-461321, 9888005339	Mangalesh
Punjab	Rajpura	M K Enterprises	Shop no.6,Curudwara Singh Sabha Market, Rajpura Town-140401	9316432866	Johny
Punjab	Ropar	Arora Communication	Shop No.1,Lehari Shah Mandir Road,Ropar	9872563032	Amit Arora
Punjab	Samana	Sangam Mobile care	Tehsile Road,Near Garg Laboury	9316868292	Vaneet Kumar
Punjab	Sangrur	NATIONAL COMPUTERS	SUNAMI GATE, SANGRUR PIN NO - 148001	1672233335, 9814586196	SARABJIT SINGH
Punjab	Sarhind	A.S. Infocom	Grain Market,Cinema Road Sirhind City-140406	01763-324777	Jaspreet Singh
Rajasthan	Ajmer	Nehal Infotech	S1, 2nd Floor, Inderlok Complex, Near Agra gate, Ajmer	3291404	Suresh sharma/ Shatrugan
Rajasthan	Ajmer	Prangan	112/10,Civil lines,Ajmer		Pareek

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Rajasthan	Alwar	R.K.Telecom	SHOP NO.112, FIRST FLOOR, GANPATI TOWER NEAR NANGLI CIRCLE , Alwar		Umesh sharma
Rajasthan	alwar	Pareek electronics	Opp. To Tehsil,Alwar		Pareek
Rajasthan	Beawar	Srikrishna Infocom	Chaoni Road, Bhagat Chauraha, Near Roadways Bus Terminus,Beawar	329675	Shravan
Rajasthan	Bhilwara	Ajanta Communications	No3,Bapna Complex,Pur Road,Bhilwara	9351610212	Shravan
Rajasthan	Bikaner	Tech Solutions	1st floor,222&223 , Ganpati plaza, KEM Road, Bikaner	3292423	Aziz/Vika
Rajasthan	chittorgarh	Arihant Infotech	A46,Meera Market, Near Rajasthan Patrika Office, Chittorgarg	325933	Abhishek
Rajasthan	chomu	Tambi Telelink	Kotwali chabutra, dhan ji ki gali, Sadar Bazar Chomu	9314090400	Anup tamb/DP Saini
Rajasthan	Dholpur	Tirupati Telecom	14,Bhagwati Market, Near Jagan Cinema hall, Jagan Tiraha,Dholpur		Moshin/ Devender
Rajasthan	Jaipur	Alpha Infotech Systems	F-1 , First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015	3299724	Shatrugan mangal
Rajasthan	Jaipur	Vishwas Infoteck	13-14,Indira Switch, Opp Chambal Power House, Hawa Sarak,Civil Lines, Jaipur-302016	3242050	Madan
Rajasthan	Jaipur	Alliance Communication	G6,City plaza,Space Cinema Hall, Jhotwara Road, Jaipur-16		Amit/Bhushan
Rajasthan	Jaipur	Solution Computers	Plot no4,Krishna nagar II, Janpath, Lalkothi, Near Hotel Paradise, Jaipur.		Dhreej mathur
Rajasthan	Jhunjunu	M 5 Mobile Point	Shop num.5,Kaswan Complex,Opp Roadways Bus Stand,Jhunjunu		Abhshek/Sunil
Rajasthan	Jodhpur	Omega Electronics	UC/4, Adeshwar Tower, Main Chopasani Road, Opp.Gehlot Watch Co, Jodhpur-342003	3291214	Pratap singh
Rajasthan	Jodhpur	Space Electronics	Shop no4, Manidhari Hospital, Residency road, Jodhpur	3291214	Hemanbt
Rajasthan	Jodhpur	Digital electrocare	3/4B, 1st Polo Pawta,Jodhpur		Johender
Rajasthan	Kishanganh	Capital Enterprises	5,Radha Krishan market, Opp. Sardul school, Kishangarg	326550	Shamugan
Rajasthan	Kota	Cyber Infosystems	26, Ground floor, Kalawati Palival market, Gumanpura, Kota-324007	232153	Rais khan
Rajasthan	kota	Rajesh electronics	355.Shopping centre.Near Jain Mandir,Kota		Rajesh
Rajasthan	Kota	Saya electronics	1-TA-16,Vigyan Nagar,Kota		Lalit
Rajasthan	Kotputli	Isha Communications	11 , ground floor, Govardhan plaza, Nehru Bazar, Kotputli		Vjender
Rajasthan	Nagaur	Jam Appex	Shop num.7, Opp. Old power house, Station road, Nagaur	329595	Amit
Rajasthan	Nathdwara	Geniune Infotech	Shop num.10,Suriya apartments, Opp.Vandana talkies, Bus stand, Nathdwara.	329208	Gajender
Rajasthan	Pali	Mansi Mobile	9,Vasant Vihar,Opp. Bangur college,Pali		Abhishek
Rajasthan	ShrigangaNagar	Telecare Servicies	33J Block, Near Birbal Circle, SriGanga nagar	3207687	Abhishek
Rajasthan	ShrigangaNagar	Electro device care	10 H Block, Sri Ganga nagar.		Raman choudhary
Rajasthan	Sikar	Rita Computers	ShopNo4, Kabra Market, Shramdan Marg, Sikar		Saurav chakravarthy

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Rajasthan	Udaipur	Ficusa Enterprises	13,Darshanpura.Opp.M.B.Commerce College Gate, Nr Computer Zone,Udaipur-313002	2410002	Mahak/Vrendra
Tamilnadu	Ambasamudram	THE MOST TECH	63D .k.n.v.complex, Opp to Marichamman Temple , Ambasamudram	04634-251143	mr.stany
Tamilnadu	Arkonam	G.M. MARKETING	NO.3/4, SUBURAYAN STREET, ARAKKONAM-631001	04177-231395	Mr. p.gajapathi
Tamilnadu	Arni	Digitech Computers	Shop No. 201/82- B1, SM Road, Arani - 623101	04173-223929	d.mohan ram
Tamilnadu	Aruppukottai	THE MERCURY COMPUTERS	607, MADURAI ROAD, NEAR NEW BUS STAND, ARUPPUKOTTAI-626101	04566-222552	Mr. R.BOOMINATHAN
Tamilnadu	Attur	VRNET	V.R.Net,Dr.Arumugam complex,salem main road ATTUR	04282-243585	Mr.Senthil kumar
Tamilnadu	Batlagundu	Karthik Communications	No 221, Main Road , Batlagundu- 624202	9360019090	Mr Lakshmanan
Tamilnadu	Bhavani	Sri Abirami Electronics	2E , Pavadi Street, Anthyur Corner, Bhavani-638301	04256-230919	Mr Balamurugan
Tamilnadu	Chegalapatu	SKB Electronics	No-42 Devarajanar pillai Street, Vedachalam Nagar, Chengalpet	044-37406080	Mr.Balaji
Tamilnadu	Chennai	Genesis Communication	63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020	044-24401188	Mr Suresh
Tamilnadu	Chennai	GS Systems	547/352, F M Towers, Mount Road, Nandanam, Chennai-600035	044-24330889	Mr.Nicholus
Tamilnadu	Chennai	Sabisu	B2, Golden Enclave, New 275, Old 184, Poonamallee High Road, Kilpauk, CHENNAI 600 010.	044-26612347	Mr.palani
Tamilnadu	Chennai	Unicare Infocomm Services	No.293, Arcot Road, Next to Indian Overseas Bank, Kodambakkam Chennai - 24	044 24724666, 044 52047059, 09382306857	Kartik
Tamilnadu	Chennai	GARAGE DE TELECOM	OLD No:30, NEW No: 10, KMBF BUILDING,1ST FLOOR, DURAISAMY ROAD, NEAR POTHYS,T.NAGAR, CHENNAI 600017	044-28143454	
Tamilnadu	Chidambaram	Future Tech	Hasan Towers, 1st Floor, No. 14, V.G.P.Street, Near Hotel Ritz, Chidambaram	04144-222150	Mr.Shaker
Tamilnadu	Coimbatore	Fast track	138-C, TV Swamy Road (West) , RS Puram , Coimbatore - 641002	2551155 ,	Mr Anand
Tamilnadu	Coimbatore	Nucom Services	3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore - 641037.	4351569	Mr.Uthaman
Tamilnadu	Coimbatore	Classic Electronics - Coi.	No 1/1 , Alagappa Road , 6th St, Tatabad, Coimbatore - 640012	4374875	Mr Arivazhagan
Tamilnadu	Cuddlore	Kasturi Cellular Service	NO: 37 (2C) BHARATHI ROAD, CUDDALORE. 607 001, CUDDALORE DISTRICT,TAMIL NADU.	04142 - 220183	Mr Raghupati
Tamilnadu	Cumbum	IG MOBILE SERVICE GALLERY	No 52, Gandhiji Street, CUMBUM-625516	9360211100	Mr.Senthil kumar
Tamilnadu	Dharapuram	IT Zone	40-A-1, Bye Pass Corner, Dharapuram-624202	9360360779, 04258-329293	Mr Ramakrishnan
Tamilnadu	Dharmapuri	CALRITY DIGITAL PHOTO&AUDIO	98/29C KANDASAMY VADIYAR STREET, DHARMAPURI, 636701	04342-265835	MR. RAJ MURUGHESAN
Tamilnadu	Dindigul	padma electronics	15,Dudley high School, Dindigul	0451-2427080	murali chandra
Tamilnadu	Erode	Jans Electronics	29, Sathy Road, Near Hotel Oasis, Erode - 638004	3258526	Mr Kannan
Tamilnadu	Gobichettipalayam	BEST ELECTRONICS	47a/1, kms complex kachery medu, gobichettipalam	04285-225598	Mr. g.jayakumar

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Tamilnadu	Hosur	Suryas will of people	R S Towers, Opp Traffic Police Station, Bangalore By Pass Road, Hosur-635109	04344-246687	Shanmugam
Tamilnadu	Kalkkuruchi	NEW MAGESTIC CELL SALES&SERVICE	OPP TO TELEPHONE EXCHANGE, GANDHI ROAD KALLAKURICHI	04151-228270	MURUGESAN
Tamilnadu	Kancheepuram	Classic Mobile Care Centre	Door No.67-A, (Shop No.5), P.S.K. Street, Kancheepuram-631 501	9345636900	Mr. Damodaran
Tamilnadu	Karaikal	SHREE HARINI CELLULOR SERVICE	OPP. TO NEW BUS STAND , BHARATHI MAIN ROAD,KARAIKAL-609602	320544	K.SELVAGANAPATHY
Tamilnadu	Karaikudi	SITIYES ELECTRONICS	10 A / 3 , Muthulakshmi Complex, Opp to Income Tax Office, Sekkalai, Karaikudi - 630002	9362611455	Mr.SVEERAPANDIYAN
Tamilnadu	Kanur	Aswathi Electronics	108 ,Old Bye-pass Road , Near KG Hospital , Kanur	9360244555 , 9367123748	Mr Satish Kumar
Tamilnadu	Kovilpatti	ST.MARYS CELLPHONES	No.6, Rajakumari Towers, AKS Theater Road, Kovilpatti	9360533649 / 9894133839	Mr. Iyyappan
Tamilnadu	Krishnagiri	Madura Care Centre	No 361, Crown Complex, Bangalore Main Road, Krishnagiri-635001	9364258223	Mr Suresh Kumar
Tamilnadu	Kumbakonam	FARGAN ELECTRONICS	NO.5 VRS COMPLEX, HAJJAR STREET, KLIMBAKONAM- 612001,	0435- 2401123, 3290303	SURBUDEEN
Tamilnadu	Kuzhithurai	Mobile Care	Shop no 211, SM Arcade, Main Road, Marthandam , Kuzhithurai - 629165	270587	Mr Surendra Kumar
Tamilnadu	Madurai	Devaa Electronics	No.4, Thirumakulam North Street,Near Ayyappan koil, Thhallakulam, Madurai-625002	4360995	Guna
Tamilnadu	Mayiladuthurai	NRS MOBILE CITY	NO-28 - C/14, R.R.COMPLEX, MAILADUTHURAI	04364-223277	ABDUL RAHIM
Tamilnadu	Nagercoil	Redeemer Electronics	Shop no 2, Pillars Gate, Balamore Road, Nagercoil-629001	04652- 327788, 9443453490	Mr.Dinkar
Tamilnadu	Namakkal	V.R CARE	77/2, Veera Vilas, Trichy Main Road, Namakkal - 637001	04286-329304	Mr. R.Vijayalakshmi
Tamilnadu	Ooty	MOUNTAIN CELL COM	NO-302,Band lane, Commercial road,Near Liberty Theatre, Ooty-643001.	0423-2443787	Mr.Sujith & Miss .Geetha
Tamilnadu	Palani	HI-TECH ELECTRONICS	No.76, New Dharapuram Road, Opp. ICICI Bank, Palani - 624601	04545-240244	Mr. ramachandran
Tamilnadu	Paramathy Velur	Vishwak Mobiles	No 5, KK High School Building, 98, High school Road, Paramathy Velur - 638182	04268- 224348, 9360110755	Mr Mohan
Tamilnadu	Pattukottai	MOBILE CARE	127, BIG STREET, PATTUKOTTAI	04373-252150	MR.ARUL ALAGAN
Tamilnadu	Perambalur	THE BEST	Vikanand st., M.P. office opp., Perambalur	04328-275717	Mr.P.Kumar

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Tamilnadu	Perundurai	SREE BABY ELECTRONIC	483, mainroad, perundurai	04294-221800	Mr.shiva balan
Tamilnadu	Polachi	STAR MOBILES	SHOP NO. 5 Ground Floor, Vasanth Complex, Immanan Street, POLLACHI.	04259-222230	Mr.Senthil Kumar
Tamilnadu	Pondicherry	Digital Logistics	126/2, Perumal Koil Street (Bharathi Street Cutting), Pondicherry-605001	9843093348	G Singaravelu
Tamilnadu	Pondicherry	BALAJI ELECTRONICS (ASC)PON-CHE	No.21, 3rd CROSS STREET, Annanagar, PONDICHERRY	3090414	
Tamilnadu	Ponneri	SRI BALAJI MOBILE CARE CENTER	NO, 26, THALUKKA OFFICE ROAD, PONNERI, THIRUVALLUR DIST-601204	27973381	Mr.BALAJI
Tamilnadu	Port Blair	UNIVERSAL SERVICE CARE	R.G.T. ROAD, PORT BLAIR, ANDAMAN-744101	03192-329588	Mr.Naveen
Tamilnadu	Pudukottai	YEM KAY ELECTRONICS	2, Subabharathi complex, 5378, 79, Angudi Road, Pudukottai-622001.	9344038441	Mr.Rajesh Kannan
Tamilnadu	Rajapalayam	SRI VIGNESH MOBILES	292\1, TENKASI ROAD, OPP BOMBAY LADGE, RAJAPALAYAM-626117	04563-220398	Mr. KJ.J.G.MUTTHIAH
Tamilnadu	Ramanathapuram	ZEENATH TELECOM	13-B/23, PAL LUCKY PLAZA, Madurai Road , RAMANATHAPURAM-623501	04567-226750	Mr.M.S.JAHIR HUSSAIN
Tamilnadu	Ranipet	Unicare Infocom Services	No.36, opp.Gangadhara Muddaliar Middle School, MBT Road, Novelpur,ranipet, Vellore Dist.	270806	Mr.Basker/ Mr.karthik
Tamilnadu	Rasipuram	SMS CARE SERVICE	No 179 / 1, Anna Salai, Ground Floor, Rasipuram-637208	9345052553	Mr.Manikavasagan
Tamilnadu	Salem	Vishwesh Mobiles	Sixer Complex, 121/19A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007	3290535	Vasudev Nayak
Tamilnadu	Sivakasi	TELE WORLD	78, PARSN PLAZA, Chariman Shanmuga Nadar Road , OPP.TO.WATER TANK, SIVAKASI-626123	04562-325730	B.MATHAN KUMAR
Tamilnadu	Tambaram	SARAVANAS INFOCOM SERVICES PVT LTD	New No-43 ,Old No:3A,Mudichur road,Tambaram west,chennai 600045	044-32915599	Mr.Palani/ Mr.ranjith
Tamilnadu	Tenkasi	AIRTONE	1/ 17, KMSS complex, west masi street, Tenkasi. 627811	04633-227980	Mr. MNagaraja sankar
Tamilnadu	Thanjavur	Z M Electronics	1006/1007, South East Rampart, Opp to Municipal Higher Sec School Tanjore - 613001	272595, 329554	Zauddin
Tamilnadu	Tindivanam	REVA COMMUNICATIONS	Old No. 117/1, New No. 205/1, Nehru Street, Tindivanam - 604001	225250	LAKSHMI NARAYANAN
Tamilnadu	Tiruchendur	ARK MOBILE SOLUTIONS	ARK DTP centre, No. 1 a 7 North car street, Rayan Complex, Tiruchendur. 628215	04639-243339	Mr.Mahesh
Tamilnadu	Tiruchengode	BALAJI ELECTRONICS	108 s s d road,near lorry stand thiruchengode	04288-255157	Mr.sekar
Tamilnadu	Tirunelveli	Classic Electronic	39, Trivendrum Road, Opposite Kalimark, Welcome Complex, Palayamkottai, Tirunelveli-627002	2575801, 3290339	Erkins
Tamilnadu	Tirupattur	Acal Computer Systems	52/1, kkc complex, krishnaginri road, tirupattur	325385	sunder
Tamilnadu	Tirupur	Shri Vasavi Electronics	*# 155-303, Mangalam Road, Karuvam palayam, Tirupur -641604*	4244009	MR.U.B. Bala Murali

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Tamilnadu	Tiruvanur	Softel Teleservices	No 21, Municipal Complex , Ground Floor , Panagal Road , Tiruvanur-610001	04366- 22110, 9362721444	Mr Ravi
Tamilnadu	Tiruvellore	Yamkarna Computer	38/1/86 JAWAHARLAL NEHRU ROAD, OPP TO SBI MAIN BRANCH, THIRUVALLUR - 602 001	37600329	Mr. Saravana
Tamilnadu	Trichy	S K Electronics	Raj Complex, 9/A EVR Road, Puthur, Trichy- 620017	277,194	Krishnan
Tamilnadu	Tuticorin	Snows Cell Care	Kala Complex, No 20.B-1,W G C Road, Tuticorin-628002	0461-2354043	Kennedy
Tamilnadu	Udumalpet	ALLWA ELECTRONICS	5 Thuluva vellar shopping complex, V.O.C. street,UJIDUMALPET.642126	04252-223047	Mr. Sentamarai kannan
Tamilnadu	Vaniambadi	REVA COMMUNICATIONS	No.848/3, CL Road, Vaniyambadi - 635 751	395023	LAKSHMI NARAYANAN
Tamilnadu	Vellore	Matha Communication	4, S.L.N Plaza, Opposite Odai Pilliar Koil, Gandhinagar,Vellor - 632006	0416-2240800	Gunaak Shekhar
Tamilnadu	Villupuram	BROAD BAND	no 642, nehruji road, VILLUPURAM	222936	Mr. Pragasam
Tamilnadu	Virudhunagar	RBC Electronics	76/9, Lakshmi Complex, Pullalakkottai Road, (Opposite Uzhavar sandhai), Virudhunagar-626001.	04562-420160, 9344869593	Mr Karpuruswamy
U.P. (East)	Barabanki	Yash Enterprises	Rashid Enclave, Mugal Darbar, First Floor,nagar palika rd, Barabanki	9336323714	Mr. Ajay Srivastava
U.P. (East)	FAIZABAD	Microworld Computer Hardware Lab	1st floor, Baldev Plaza, Rekhahganj, Faizabad	9335098244	Kapil/Sunil
U.P. (East)	Fatehpur	TRIMURTI TELECOM SERVICES	230, SHADIPUR CHAURAHA, NASEPEER ROAD,FATEHPUR-212601	9336223093	Sanjay Sachan
U.P. (East)	Gonda	DIGITECH SERVICES	Suraj Complex Malviya Nagar, Ground Floor,In front of Diatt. Mahila Hospital, Gonda	9336695719	Atul Singh Chauhan
U.P. (East)	HARDOI	Shjra Electricals & Appliances	553 STATION ROAD, RAILWAY GANJ, HARDOI-241001	9335348407	Gaurav
U.P. (East)	JHANSI	Krishna Enterprises	372/A CIVIL LINES,GWALIAR ROAD, JHANSI-284001	9335090997	SUJEET
U.P. (East)	Kanpur	AAKARSH ELECTRONICS	63/2 C(9)BALAJI COMPLEX, THE MALL, KANPUR	9335360303	Mr.Raman
U.P. (East)	Kanpur	AR Infotech	111/402 Ashok Nagar, Kanpur Pin 208012		Amit Trivedi
U.P. (East)	Kanpur	LB Infotech	124/122A GOVIND NAGAR, KANPUR	0512-3207303	Deepak Bhatia
U.P. (East)	LAKHIMPUR	S S ELECTRONICS	GJRDARSHAN BUILDING, KACHEHRI ROAD, LAKIMPUR KHERI, LAKHIMPUR -262701	9335038258	SAURABH SINHA
U.P. (East)	Lucknow	ALFA ELECTRONICS	Shop No.CF20 ABC Complex, Kanpur Road, Lucknow	0522-3948730	Hajjinder Singh

State	City	ASC Name	ASC Address	Phone No.	Contact Person
U.P. (East)	Lucknow	Hitech Communication	SS 205, Road Cross Plaza, Badshah Nagar Crossing, Lucknow.	9335088061	MR.RAVI PRAKASH/ MR.RAJENDRA RAMAN
U.P. (East)	Lucknow	NET COM	3 way road, City Point, Opp Krishi Bhawan, Lucknow-226024	0522-3094222	Vinod Sharma
U.P. (East)	Lucknow	RR ENTERPRISES	Shop No.3,first floor, Deewan Chand Complex, 292/11 Chowk, Lucknow	0522-3262263	MR.YOGESH
U.P. (East)	Lucknow	MOBILE DOT COM	G2 Shri Ram Towers Ashok Marg ,Lucknow	9335819202	Mr Anand Jhouri
U.P. (East)	Raebanilly	Karuna Enterprises	Shop No.3, Bajpai Market, Beliganj, Maik Main Road, Raebanilly	9336005741	Vikas
U.P. (East)	Sitapur	Higrade Computers	7, Muncpal Market, Sitapur	05862-351808	Sanjeev Goel
U.P. (East)	SULTANPUR	S S INFOCOM	SHOP NO. 14&15 NANDINI COMPLEX NEAR SUPER MARKET SULTANPUR-228001	9335055217	SACHIN DWIVEDI
U.P. (East)	Unnao	Avijit Infocom	251 opp Collector Ganj, Unnao	0512-6820020	VISHNU PANDEY
Uttar Pradesh	Agra	NSC Computers	Shop No G-124, Block No- 29, Sanjay Place, Agra -	9319113550	Rajeev Singhal
Uttar Pradesh	Agra	Ankur Care Centre	6/1, M.G.Road, Agra.	9412254152	Ankur Goyal
Uttar Pradesh	Agra	Space Consultancy & Services	UG 1 & 2, Opp. Jaihind Hotel, Merchant Chamber, Sadar Bazar, Agra	9358504140	Kapil Sharma / Rihan Pervej
Uttar Pradesh	Aligarh	Infocare	17, Vikram Arcade, Railway Road, Aligarh -	9359588880	Kamal Jain / Prabal bansal
Uttar Pradesh	Aligarh	A.V.Computer Services	City Enclave opp.Kumar Nursing Home Ranghat Road	9412274391	Vaivah Gupta
Uttar Pradesh	Allahabad	RADIO CENTRE	SHOP NO-3 1ST FLOOR MEENA BAZAR, Allahabad	3292488	MR. MANISH KHANDNA
Uttar Pradesh	Allahabad	B.P.Electronics	28, M.G.Marg, opp Rama Jewlers Civil lines, Allahabad-211001	3290315	Mr. Umesh Aggarwal
Uttar Pradesh	Allahabad	MICRONET SOLUTION	B 38/1 .SHOP NO. FF3 VASHITSTHA VINAYAK TOWER, TASHKAND MARG, CIVIL LINES, ALLAHABAD	9335395183	Mr. Hashmi
Uttar Pradesh	AMROHA	SHREE JEE TRADERS	KAILSA ROAD NEAR MODABADI GATE, AMROHA	9319075289	SIDHARTH AGARWAL
Uttar Pradesh	AZAMGARH	RAJASTHALI	ASIF GANJ, CHOWK, AZAMGARH-276001	223644	MR.TRILOKI NATH JALAAAN
Uttar Pradesh	Badyun	Customer Care Services.	Plaza Market 1st floor Near Chantaghar sixroad Badyun.	9319086944	Mr. Nazim
Uttar Pradesh	BAILA	Sankatha Communications	Mall Godam Road Dr.S. N.Pandey Clinic Chowk Balia-277001. UP	9336635533	Mr. Manish
Uttar Pradesh	Bareilly	JAI INFOTECH	SA-96 DEENDAYAL PURAM BAREILLY	0581-3208484	Mr Rohit Tandon
Uttar Pradesh	Bareilly	Sapan Infotech	G - 64 A Kunwar Complex, Near Gupta Watch Co,116 Civil Lines, Bareilly	9359102467	Mr. Dhirendra Negi
Uttar Pradesh	Basti	Royal Enterprises	Shop No.12 Nagar Palika Market, Company Bagh, Basti	9336784054	Sunil Kumar
Uttar Pradesh	BHADOI	Kislay Communication	VINDA MARKET NEAR TEHSIL, BHADOI-224101	9235506029	KISLAY
Uttar Pradesh	Bijnor	Konark Service Centre	Shop No.7,1st Floor, Near Azaj Ali Hall, Nagar Palika Complex, Bijnor.	9358364067	MrPratyush Gupta
Uttar Pradesh	Bullandshar	MN Telecom	Shop No-1 BHARAMAPUTRA COMPLEX,KALA AAM, BULANDSHAR	9.358.011.688	Mr Taukir Khan

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Uttar Pradesh	CHANDOUSI	OM TECHNOLOGIES	697, SITA ROAD,NEAR GANESH MANDIR, CHANDOUSI	9359986766	SACHIN GUPTA
Uttar Pradesh	DEORIA	ATHARAV COMMUNICATION	SHOP NO 5,SHANTI COMPLEX, HANUMAN MANDIR ROAD	9305012566	K.N.GUPTA
Uttar Pradesh	Etah	Triveni Computer Service	688/1 Vijay Nagar,Infront of Shradha Cinema, Thandi Sadak, Etah-207001	9719398761	Vinod Kumar
Uttar Pradesh	Etawah	Frontline Computer	132, Sivil lines, Pakka Talab X-ing, Opp. HeroHonda Showroom, Etawah-206001	9219404194	Mr.Puneet Kaushik
Uttar Pradesh	FARRUKHABAD	WAVE TECHNOLOGIES	2 B /122 AVAS VIKAS, LOHIA PURAM, FARRUKHABAD-209625	9335921175	DHARMIER
Uttar Pradesh	Chaziabad	Charu Enterprises	Shop No.15,Opp. Sales Tax Check Post, G.T.Road,Mohan Nagar	0120-3223417	Mr.Chander Shelker
Uttar Pradesh	Chaziabad	Concessionair Documentation India Pvt Ltd (CDIL)	C-83, Rajnagar District Center (RDC), Chaziabad	0120-3292011, 4102418	Anil Tiwari
Uttar Pradesh	Chaziabad	AZURE SYSTEMS	F-28 Konark Building, RDC, Raj nagar GZB	0120-2700717	Mr. Aseem Saraswat
Uttar Pradesh	Gorakhpur	Eternal Electronics	Shop No.11, Pandey Complex, 33, Kasya Road, Opp DIG Bunglow, Gorakhpur -273001	3250395	Mr. Ajith
Uttar Pradesh	Gorakhpur	MM Communication	Udai Trade Centre, Opp Dr H.N.Singh Medical College, Basharatpur, Gorakhpur	3250395	Mr.Ashwani
Uttar Pradesh	Hapur	SMART SOLUTIONS	10, 1st Floor,City Plaza , Hapur, Chaziabad - 388001	9319384063	Mr.Rajkumar Kanaojia
Uttar Pradesh	Hathras	Arya Electricals	Bldg No.2206,Near Mayfair Hotel, Kamla Bazar, Hatras-204101	9319338655	Mr.Suneet Arya
Uttar Pradesh	Jaunpur	Shubham Pustakalya	Mandi Naseeb Khan, Near Siya College,Jaunpur	9336510130	Sudhir/Sanjay
Uttar Pradesh	Jaunpur	SUPREME COMMUNICATION	J.P. Complex, Oland Ganj, Jaunpur	9235407278	Mr.Mahatab Raja beg
Uttar Pradesh	Kannoj	DIXIT MOBILE LAB	SHOP NO. A1 WARSI COMPLEX, LAKHAN TIRAHA, KANNOJ	9335042573	SUNIL DIXIT
Uttar Pradesh	Khatauli	Sigma Systems	A-6,Shivlok Market,Near Indra Murti, G.T.Road, Khatauli	9412582668	Mr.Alok Kumar
Uttar Pradesh	Mainpuri	Raj Communication	1002, Sadar Bazar, Near PNB , Mainpuri-205001 (U.P)	9358090251	Mr.Rishabh Khirbat
Uttar Pradesh	Mathura	R K Infocare	C-1, Aithya Palace, Sonkh Adda, Junction Road, Mathura-	9319999666	Alok Gupta
Uttar Pradesh	Meerut	Care Centre	C-19 , Vardaman Plaza, Garh Road, Meerut.	0121-3249666	Mr.Ajay Mittal
Uttar Pradesh	Meerut	Systech Computers	F-124/125 1st floor Ganga Plaza, Begum Bridge Road, Meerut.	0121-4003194	Vineet Goyal
Uttar Pradesh	Meerut	COINCAP SERVICES	Labour Compound, Above Allahabad Bank,Near Akash Ganga Jewellers, Begum Bridge, Meerut.	0121-2667942	Atul Mittal
Uttar Pradesh	Meerut	Essar Services	F-122/123 1st floor Ganga Plaza, Begum Bridge Road, Meerut.	4024894	Rajiv Gupta
Uttar Pradesh	MIRZAPUR	MOBILE ZONE	RAM MARKET, PASARHATTA BAZAR, MIRZAPUR-231001.	9335785979	MR.Anup
Uttar Pradesh	Modinagar	ANANYA COMMUNICATIONS	24_K.N.MODI COMPLEX, Modinagar-201204	01232-325424	Mr.Nitin
Uttar Pradesh	Moradabad	Bhavya Technologies	A12, 1st Floor, Rampur Road, Gandhi Nagar, Moradabad	0591-3292318	Vivek Kumar Singh

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Uttar Pradesh	MUGALSARAI	SKY MOBILE WORLD	SUPER MARKET,MUGALSARAI	255505	VIBHUTI JAISWAL
Uttar Pradesh	Muzaffarnagar	ADVANCE SERIES	Shop No-15 prakash chowk Muzaffarnagar-251001	09412210142	Mr. Rajiv
Uttar Pradesh	Muzaffarnagar	Jai Computers	Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk,Central Bank Mkt, Muzaffarnagar-251001	0131-3294447	Manohar Singh
Uttar Pradesh	Noida	M R Telecom	D-329, Sector 10, Noida, (Corner Building, Noida Stadium - Jhundpura Main Road)	0120-4312715	Kailash Aggarwal
Uttar Pradesh	Pilibhit	Kamal Electronics	Station Road, Pilibhit	9319911226	Mr. M A Jilani
Uttar Pradesh	PRATAPGARH	CHANDRA PRATAP VEER & CO	KATCHERY ROAD, CHOWK BAZAR, PRATAPGARH -230001	9335048271	RAJESH AGARWAL
Uttar Pradesh	RAMPUR	MAMTA TECHNOLOGIES	OPP,JILA PANCHAYAT OFFICE, RAHE RAZA, RAMPUR	9319547583	RAJEEV YADAV
Uttar Pradesh	Saharanpur	Maharaj Communications	Near Maharaja Palace,Delhi Road, Saharanpur	0132-2720881	Pankaj Malhotra
Uttar Pradesh	Shahjahanpur	Sunny Mobile Point	258 B TARIN BAHADURGANJ, SHAHJAHANPUR	9335019616	Rajaram Maurya
Uttar Pradesh	Varanasi	Jaiswal Electronics	S6/107 KACHAHHI CROSSING,NEAR COURT, VARANSI	3200375	Mr.Sujeet
Uttar Pradesh	Varanasi	Shivam Mobile Distributors	Shop No.5,B37/115-B-1 Baradari Complex, Rathyatra Crossing, Varansi Pin 221010	933540000	Rishi Mohan
Uttaranchal	Almora	Kumar Telecommunications	Paltan Bazaar, Almora	9411525789	Mr. S Kumar
Uttaranchal	Dehradun	Krishna Communication	Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun,Uttaranchal.	0135 3290895	Vinod
Uttaranchal	Dehradun	PROMPT SERVICES-DEH	133, Old Connaught Place, Dehradun	9359903573	Mr. Bipin
Uttaranchal	Haldwani	Fairdeal Agencies	1st Floor,Nainital Road,Uttaranchal Trade Centre,Tikonia Chouraha, Tikonia, Haldwani	09359136000	Mr.Ajay Gupta
Uttaranchal	Haridwar	Maharaj Computer Services	B-7, Royal Plaza, Ranipur Mod, Haridwar	9359209901	Mr. Kamal Sachdeva
Uttaranchal	Kashipur	Tipti Communications	Station Road, Main Market, Udamsingh Nagar, KASHIPUR	9837005991	Mr.Ajay Gupta
Uttaranchal	Roorkee	Geetanjali Telecom	Shop No.6, Shyam Market, BSM Tiraha, NehruNagar, Dehradun Road, Roorkee.	01352-326510	Mr. Manish Kumar
West Bengal	Assansol	Sky Computer & Telecom	Islam Market, Nuruddin Road, Assansol-713301	2207719	Syed Arshad Ali
West Bengal	Basirhat	Teelink	Bashirhat Old Market(Bowbazar),Bashirhat Dist,North 24pgs.Pin-743411	9332511610, 03217-325499	Mr. Sukanta Debnath.
West Bengal	Behrampur	CHAITANNYA ENTERPRISE	152, B B Sen Road, Sadar bazar, PO Behrampur, Distt Murshidabad,pin-742101	9333310161	SUBHAS CHANDRA BASAK
West Bengal	Bolpur	CYBER WORLD	59, SUPER MARKET, SANTINKETAN ROAD, BOLPUR - 731204	9333739783	MR.KISHOR KLUMAR MUKHERJEE
West Bengal	Bongoan	MOLINA TRADERS	Jessore Road, Bongoan, Dist- North 24 th Pargana, PIN-743235	9332410022	Mr. Subir Dutta
West Bengal	Burdwan	San Infosys	27/1 G.T Road , East End, Burdwan -713103.	3290265	Sanjit Debnath
West Bengal	Durgapur	Digitech Service	Ashok Bhavan J.K.Pal Lane.Benachity, Durgapur -713213	3293600	Mr.Pintu Chatterjee

State	City	ASC Name	ASC Address	Phone No.	Contact Person
West Bengal	Habra	JOYRAM INFOTECH	51 Jessore Road,Habra Bazar, Das Market, Dist- 24th Pargana(North), PIN-743263	237608	Mr. Malay Das
West Bengal	Haldia	DIGITRONIX	Holding no -25 ,PO Khanjanchak, PS Durgachak, Haldia, Dist- East Medinapur-721602	9332987527	Suman Jana
West Bengal	Katwa	Devarshi Mobile Communication	Bhutnath Tala, Besides Ram Bhavan, Post - Katwa, Burdwan - 713150	03453-255197	Devananda Dutta
West Bengal	Kharagpur	S. J .Communication	Inda Main Road, Khudiram Ram Market, Kharagpur.Shop No-53. Pin -721305	9333745553	Mr.Suman Jana
West Bengal	Kolkata	Benma Infosol Pvt Ltd.	P-168/1 CIT Road, Scheme VIIM, KOLKATA 700 067	033-32943176-7	Arun Surana
West Bengal	Kolkata	Friends Communication	32(8) Barasat Road,N/L 15 no railgate,PO-nonachandanpukur, PS- Titagarh, Barrackpore, Dist- North 24PCS, PIN-743102	033-25921263	Arup Sarkar & Tarasankar Mukherjee
West Bengal	Kolkata	Jalsom Engineering Pvt Ltd	Block-A, Shop-1, Ambika Vihar,1/1 Harduttrai Chamaria Road,Howrah-711001	033-32950383	P.Mukherjee
West Bengal	Kolkata	JP Computers	58 Ekdalia Place, Kolkata - 700019	033-24401923	Somim Kabir
West Bengal	Kolkata	Skylink	8/1A, Little Russel Street, Calcutta-700071	033-32905814	HR Molla
West Bengal	Kolkata	SOURAV TELECOM	195 BLOCK-J NEW ALIPUR, N/L New Alipur State Bank, KOLKATA-700053.	033-32511256	Amit Ghosh
West Bengal	Kolkata	Sun Mobile Service	15 B.T. Road, N/L Peikpara Bus Stop, Kolkata -700002	033-32505444	VIVEK KLUMAR GUPTA
West Bengal	Kolkata	Sagnik	10A HO CHI MINH SARANI , KOLKATA-71	9830880150	RATHIN PAL CHOWDHURY
West Bengal	Krishnagar	ADDYA ELECTRONICS	13 MOHITOSH BISWAS STREET, P.O.KRISHNANAGAR, DIST: NADIA, PIN: 741101.	03472253051	MR ARJIT SEN
West Bengal	Malda	Classic Services	3 No Govt Colony, Near B.B, Medicine , Malda, Pin-752101	9332293622	Mr. S.P Ganguly
West Bengal	Ranaghat	PRAYASH	30 SWAMI YIVAKNANDA SARANI, RANAGHAT, DIST-NADIA	09333515949	Mr. Amar Nath Malick
West Bengal	Serampore	Sri Guru Mobile Service	87 B/15 G.T.Road (West), Hooghly Pin-712203	033-32528581	Shyamal Kumar Das
West Bengal	Siliguri	CARE	A.T Mukherjee Road, Subhash Pally (PRANTIK), Near SILIGURI COLLEGE, PO- Siliguri, Dist - Darjeeling.	9332211009	Mr.Snjoy Dutta
West Bengal	Tamluk	ZEROBIT	Viii- Parbatipur, P.O.-Tamluk, Dist- Purba Midnapur,PIN-721636	9434110802	Mr. Chanakya Sengupta.


LG | SERVICE

1800-180-9999*

 * MTNL / BSNL
 ** Prefix STD Code

39-01-0909**



EVERY HAND WANTS ONE

Source: IMEI based survey (2012-13)



WARRANTY CARD

This LG handset and charger comes with a 12-month warranty from date of purchase or 15 months from manufacturing date of corresponding IMEI No. Of the unit whichever is earlier, against defect in material or workmanship. In case of a defect, LG Electronics India Pvt. Ltd. undertakes to get the set repaired free of charge through its authorised service centre (ASC) or service dealer subject to following conditions:

Terms and Conditions

1. This warranty is applicable to the first purchase and in no case it can be transferred or extended.
2. Repair of this product will be carried out on a carry in basis to the nearest ASC.
3. While the company will make every effort to carry out repairs at the earliest, it however is made explicitly clear that the company is under no obligation to do so in a specified period of time.
4. The company or its authorised ASC/ service dealer reserves the right to retain any parts of the component/s replaced at its discretion. In the event of a defect being noticed in the equipment during the warranty period.
5. This warranty entitles the purchaser to free of cost repairs of the unit within warranty period and does not entitle for replacement or refund of entire unit. Claims, if any, to this warranty shall in no case exceed the purchase price of the unit.
6. In case of any software upgradation of the phone, no warranty is provided on phone memory or phone book.
7. The warranty is void in case the serial no./ IMEI no. is tampered / disfigured or details in the warranty card are not properly filled up at the time of purchase.
8. This warranty is not valid for damages resulting due to negligence, mishandling, improper use, tampering, breakage, soaking, fire, unauthorised repair and failure due to network upgrades.
9. Batteries are covered under warranty for a period of 6 months from date of purchase or 9 months from date of corresponding IMEI no. of the unit whichever is earlier
10. Warranty does not cover accessories external to the equipment supplied by the dealer.
11. The Delhi / New Delhi courts shall have the jurisdiction to try any dispute and /or suits related to or arising out of this agreement.

Customer Information Center/ Call Center Number

For any query related to the after sales service and customer support please contact us at the numbers listed below.

CITY NAME	CONTACT NO
Ahmedabad	079-26461603
Bangalore	080-39889999
Bhopal	0755-2768650
Bhubaneswar	0674-2435999
Calcutta	033-22272505
Chandigarh	0172-39010909
Chennai	044-28220370
Coimbatore	0422-2238602
Delhi + NCR	011-26145000/39889999
Hyderabad	040-23231448
Jaipur	0141-2365264
Lucknow	0522-2635535
Mumbai + Thane	022-24930044/39889999
Patna	0612-2221694
Pune	020-56031555

**ALL INDIA BSNL/MTNL SUBSCRIBERS CALL:
1901 180 9999**

BRANCH ADDRESSES

Sl. No.	Branch	Branch Office Address	STD Code	Landlines No.	Reliance No.
1.	Ahmedabad	LGEL, 233-234, Platinum Plaza, Judges Bangalore Road, Bodakdev Road, Ahmedabad - 51	079	26522794, 2607633/ 34	30628471
2.	Agra	LGEL, 1/2 Kendrya Hindi Sansthan, Khanderi Crossing, Agra	0562	2530911, 2530917	
3.	Asansol	LGEL, Block-E, Ist Floor, PC, Chattarjee Market, Rambandha Tala, GT Road (E) Asansol- 713303	0341	3090636	3062001, 3092010
4.	Aurangabad	LGEL, 302 CIDCO No.3, Opp Hotel Ramajit, Jalna Road, Aurangabad- 431003	0240	2344705	
5.	Amritsar	LGEL, Ganda Singh Wala, Majitha Road, Basement of Syndicate Bank, Amritsar, Punjab	0183	5548001-3	
6.	Bhatinda	LGEL, Y P O Gursar Samewala, 12 KM Milestone, Village Mehta Link Road Bhatinda-151001	0184	2620448, 2229933	308824/ 75
7.	Bangalore	LGEL, 93, 11N Mansion, Ground Flr, KBI Road, Bangalore - 560027	089	5114545	3070753/ 54
8.	Bhopal	13 A Vignes Warehousing Corporation Sector G Govindpura Industrial Area J K Road Bhopal	0755	5326307/ 48, 53260717	3062938, 3089804
9.	Bhubaneswar	LGEL, Plot No.02, 1st Flr, Bajpui Nagar, Bhubaneswar- 751009	0674	2531420, 2534880	3066523, 3066526
10.	Calcutta	LGEL, 1, Ho-Chin-Min-Sarani, 6th Floor, Metro Towers, Calcutta-700071	033	22832350 51	30646125
11.	Chandigarh	LGEL, Plot No.177-C, Ind. Area, Phase-1, Chandigarh.	0172	5087389/ 90	
12.	Chennai	LGEL, AA11, 2nd Avenue, Fatima Tower, Anna Nagar West, Chennai-600040	044	55510500-08	3024476/ 79
13.	Cochin	LGEL, 40/1270, Vasudeva Buildings, TD Road, Enmakulam Cochin-682011	0484	2369966, 2370744	3048877/ 78
14.	Coimbatore	LGEL, 25/58, Sangrampur Main Road, Kannappa Nagar, Coimbatore-641027	0422	2325296, 2331862	3064613, 30949573
15.	DESA, DEE	LGEL, 221 Okhla Industrial Area, Phase-III, New Delhi	011		3058821, 30800276/ 80
16.	DENS, DEW	LGEL, 13 MILESTONE, ROHTAK ROAD, Opp Maharaja Arsen Hospital, Punjab Bagh, New Delhi- 110026	011		30697397, 30935111
17.	Dehradun	LGEL, M- 22, Mobbewala, Tata Commercial Compound, Dehradun Saharanpur Road, Dehradun	0135	2644213, 2644483	3063411/ 12
18.	Goa	LGEL, Plot No- D- 38 D- 4, Rego Bldg, Aoi Santacruz, Bambolim, Goa-403	0832		3064759, 3094955/ 56
19.	Gurgaon	LGEL, II Ind Flr, A Block, Centre Point Bldg, Sushant Lok, Gurgaon.	0124	5047461/ 62/ 63	3050013, 3090959
20.	Ghaziabad	LGEL, F- 10, ROC, Rajnagar Ghaziabad	0120	2722973, 2724866	3043465, 3043467
21.	Ghawati	LGEL, Shantiner Buznak, C K Aggarwal Path, Cherukuthi, Guwahati- 781003	0361	36896, 36286, 26636, 26636/ 1, 26636/ 2	
22.	Hyderabad	LGEL, 8/ 11, 1, RD, Uppal, Hyderabad- 500039	040	2720794, 26105/ 66	30921140
23.	Hubli	LGEL, 603/ 18, Ravi Nagar Road, Behind Renuka Petrol Pump, Gokul Road, Hubli- 580030	0836	2327251/ 52/ 53	3060748, 3092951
24.	Indore	LGEL, 3rd Flr, 304 Bans Trade Centre, 58/15 M.C. Road, Indore- 452003	0731	5055523- 24, 2524985, 25055669	3056906, 3056906
25.	Jaipur	LGEL, B-71 Sahakar Marg, Lal Kothi Scheme, Jaipur- 302015	0141	2741553, 2742839	3051458, 3051478
26.	Jalandhar	LGEL, Opp Jassi Market, Village Khaurla Near TVS Godown, G T Road, Jalandhar	01824	502667/ 68	
27.	Jammu	LGEL, Plot No.-52, Transport Nagar, Narwal, Jammu	0191	2674749/ 20, 2474386, 2474384	
28.	Jodhpur	22/1-AJ, HICO Heavy Industrial area, Jodhpur- 342003	0291	2724263, 2742384	3093487, Accounts, 3093489
29.	Kundli	LGEL, Sunshine Enterprises, Sunder Cold Storage, Gt Karnal Road, Kundli-Sonapat	0130	2219201-4	3069771, 30991486
30.	Kozhikode	LGEL, 11/ 1, 434, Eranielkall Bldg, Cheruvy Road, Kozhikode-673001 Kerala	0495	2366715/ 16, 2366478	3051561/ 68
31.	Lucknow	LGEL, 537, Hanj Kari, Keshav Nagar, Sitapur Road, Lucknow	0522	2757538, 59/ 58/ 59	3051521/ 08/ 09
32.	Ludhiana	LGEL, Village Chand Near Badwal Railway Station, Opp ferropur Road Ludhiana.	0161	2604412-5	3059985
33.	Madurai	LGEL, 1/ 1-54, Jothimal Godown, Madurai Dindigul Highroad, Paravai, Madurai-625402 Tamilnadu	0422	2640616	
34.	Mumbai(N & S)	LGEL, UHI No.3, Wmg, 2nd Flr, Tax Centre Behind HDFC Bank, Off Sakhi Vihar Road, Chandivli, Andheri(E), Mumbai-400072	042	2847410-4	30522108, 30516712
35.	Nagpur	LGEL, 5a Road, No.13 Behind Mstr Workshop, MIDC, Hinga, Nagpur- 440016	07104	2351240, 235122, fax 234401	3062641/ 42
36.	Patna	LGEL, Sumitra Sadan Ind Flr, West Boring Road Crossing Patna-800001	0612	2219201-4	3069874, 3099156
37.	Pune	LGEL, 105/ 106, Premium Point, Bldg, Chhatrapati Shivaji Maharaj, Pune- 411005	020	5060378, 56030732/ 33/ 34	3092280, 30967366
38.	Pune Phnt	LGEL, Plot A-5 MIDC, Ranjan Gaon, Tahseel Shree Distt. Pune	02138	232368/ 69	
39.	Raipur	LGEL, Nathani Compound, Shyam Nagar, Katora Talab, Raipur (C.G.)	0771	5037430, 5035731	3069307/ 08
40.	Ranchi	LGEL, 402, Commerce Tower, Opp. Gel Church Complex, Main Road, Ranchi	0651	2331519, 2331815	3060426
41.	Rajkot	LGEL, 301, 302, Dharmajai, Dr. Yagnik Road, Rajkot - 362003	0281	2601499, 2467692	3064083, 3094306
42.	Surat	LGEL, 1001-1004, Ascon Plaza, 8th Flr, Anand Mahal Road, Behind Bhulka Bhavan School, Adajan, Surat- 395009	0261	2739282-85	3054419
43.	Thane	LGEL, Ag-1-13, Jhaiben Commercial Complex, Opp. Durgam Park, B/Wg- Kabher, Thane- Bhiwand Highway Dist. Thane-421302	02532	277497, 2774559	3058264
44.	Trinapuri	LGEL, 19-13/34A, Behind Hira Krishna Showroom, Benguanta Road, Trinapuri- 517501	0877	2302304/ 68	
45.	Trichy	LGEL, 5/2, Kumaran Plaza, Kumaran Nagar, Vayalar Main Road, Trichy- 17	0431	2771530/ 40/ 50	3069564
46.	Udaipur	LGEL, 101, Moti Magri Scheme, Udaipur	0294		3094246, 3093462
47.	Varanasi	LGEL, 1st, Shree Ganag Keramos Compound, Laharata Road, Shivdaspur, Mandusadih, Varanasi.	0542	2373919	3091773/ 74, 30890000
48.	Vijaywada	LGEL, HFL, Shree Ganag Keramos Compound, Ringy Road, Near Executive Club, Vijay wada - 520008.	0866	2490128	3094338, 3094538

Dealer name with stamp Dealer address
IMEI No. Date of sale Serial no.

