



Ultrathin Keyboard Folio m1




Setup Guide

Contents

English.	3
繁體中文	12
한국어	21


Know your product

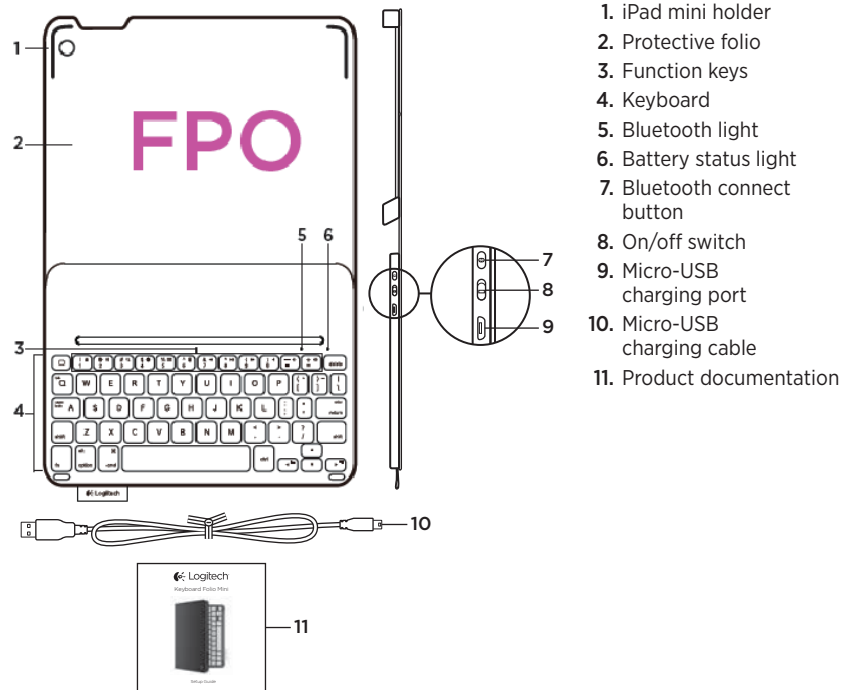

Setting up the keyboard folio mini

Getting started

1. Open the keyboard folio mini and insert your iPad mini in the iPad mini holder:




2. Move the iPad mini holder into the typing position (see "Using the keyboard folio mini").

Establishing connection with your iPad mini

The keyboard folio mini links to your iPad mini via a Bluetooth connection. The first time you use the keyboard folio mini, you must pair it with your iPad mini:

1. Turn on the keyboard:

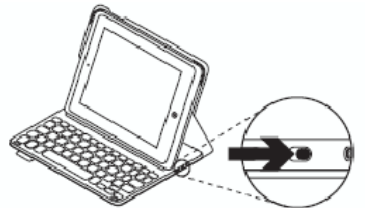

The Bluetooth light blinks to indicate that the keyboard is discoverable, ready for pairing with your iPad mini. The first time you turn on the keyboard it remains discoverable for 15 minutes.

If the status light turns red, charge the battery. For more information, see "Charging the keyboard battery."

2. On your iPad mini:

- Make sure your iPad mini's Bluetooth feature is on. Select Settings > Bluetooth > On.
- Select "Logitech Keyboard Folio Mini" from the Devices menu.


3. If your iPad mini requests a PIN, enter it using the folio keyboard (not on your iPad mini).

When successful connection is made, the Bluetooth light turns on for a short time, and then turns off.

Connecting to another iPad mini

1. Make sure the keyboard is turned on.
2. Make sure your iPad mini's Bluetooth feature is on. Select Settings > Bluetooth > On.

3. Press the Bluetooth Connect button:

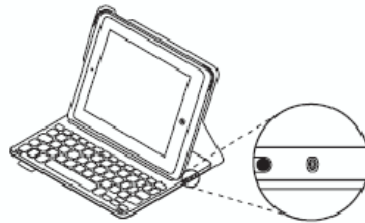


The keyboard is discoverable for 3 minutes.

4. Select "Logitech Keyboard Folio Mini" on your iPad mini's Devices menu.
5. If your iPad mini requests a PIN, enter it using the folio keyboard (not on your iPad mini).

When successful connection is made, the Bluetooth light turns on for a short time, and then turns off.

Storing your iPad mini for travel

1. Insert your iPad mini in the iPad mini holder.
2. Close the keyboard folio mini:




Using the keyboard folio mini

Two viewing positions

The keyboard folio mini provides two viewing positions—one for typing and another for browsing.

To type, move the iPad mini holder into the typing position, aligning it with the built-in magnet to secure it. Turn on the keyboard:

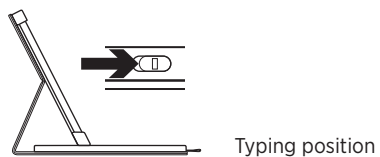

To browse, place the iPad mini holder in the browsing position remembering to switch off the keyboard to conserve battery power:



If you don't use the keyboard for a while in the typing position, it enters sleep mode automatically. Pressing any key wakes it.

Light indicators




















Status light

Blinking green	The battery is charging.
Green	The battery is charged (more than 20%).
Red	Battery power is low (less than 20%). Recharge the battery.

Bluetooth light


Blinking blue	Fast: The keyboard is in discovery mode, ready for pairing. Slow: The keyboard is trying to reconnect to your iPad mini.
Solid blue	Bluetooth pairing or reconnection is successful.

Function keys

 Home = iPad mini Home screen	 Fn + 0 = Mute
 Fn + 1 = Lock screen Locks or unlocks the iPad mini screen	 Fn + dash = Volume down
 Fn + 2 = Siri Use your voice to send messages, make calls, schedule meetings, and more	 Fn + plus = Volume up
 Fn + 3 = Search Launches the iPad mini search function	 Fn + X = Cut
 Fn + 4 = Switch language Switches the keyboard language	 Fn + C = Copy
 Fn + 5 = Virtual keyboard Shows/hides the virtual keyboard	 Fn + V = Paste
 Fn + 6 = Slide show	 Fn + Left cursor = Select left Selects text on the left, word by word
 Fn + 7 = Previous track	 Fn + Right cursor = Select right Selects text on the right, word by word
 Fn + 8 = Play/Pause	 Fn + Spacebar = Switch applications
 Fn + 9 = Next track	

Note: To select a function key, press and hold the Fn key, and then press the key indicated above.

Charging the keyboard battery

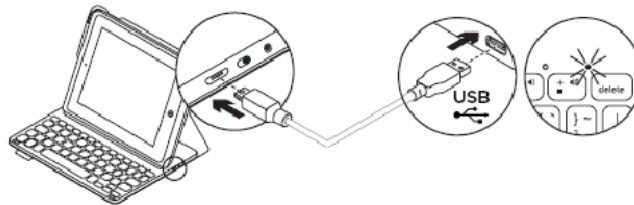

If the status light is red the keyboard folio mini battery needs to be charged.

1. Plug one end of the micro-USB cable into the charging port, and the other end into a USB port on your computer.


The status light blinks green as the battery charges.

Note: Please note the power input max is 5V, 200mA, if you use an alternative charging solution.

2. Charge the battery until the status light turns solid green.

Battery information

- A fully charged battery provides about three months of use when the keyboard is used about two hours a day.
- Charge the battery if the status light turns red briefly after the keyboard turns on.
- When not in use, turn off the keyboard to conserve battery power.
- The keyboard enters sleep mode automatically if not used for a while in the typing position. Press any key to wake it.

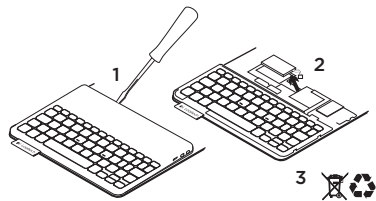Battery disposal at product end of life

1. Pry off top cover of keyboard with screwdriver.
2. Detach battery from circuit board and remove battery.
3. Dispose of your product and its battery according to local laws.

Visit Product Central

There's more information and support online for your product. Take a moment to visit Product Central to learn more about your new keyboard folio mini.

www.logitech.com/support/keyboardfoliomini

Browse online articles for setup help, usage tips, and information about additional features.

Connect with other users in our Community Forums to get advice, ask questions, and share solutions.

Find a wide selection of content including:

- Tutorials
- Troubleshooting
- Support community
- Online documentation
- Warranty information
- Spare parts (when available)

Troubleshooting

The keyboard does not work

- Press any key to wake the keyboard from sleep mode.
- Turn the keyboard off and then back on.
- Recharge the internal battery. For more information, see “Charging the keyboard battery.”
- Re-establish the Bluetooth connection between the keyboard and your iPad mini.
- Verify that Bluetooth is turned on in your iPad mini's settings (Settings > Bluetooth > On).
- Choose “Logitech Keyboard Folio Mini” from the Devices menu on your iPad mini. The status light turns solid blue when Bluetooth connection is established.