

Setup DIRECTV

Follow these steps to set up for DIRECTV® service. *If you need to change an existing setup, reset the system as explained in Section 4.5 of the User's Guide.*

TRACKING DTV 101 
SYSTEM NEEDS SETUP

1. Press any button to begin the setup process.

SERVICE= DIRECTV?
 CHANGE ✓ ACCEPT

2. "DIRECTV" is the selected service. Press ✓ ACCEPT.

ANTENNA= ROUND?
 CHANGE ✓ ACCEPT

3. Press CHANGE until display shows the desired antenna type.

Antenna	Satellites Used	Satellite Switching
ROUND	101 only	None (Unnecessary)
OVAL2	101, 119	Automatic
OVAL3	101, 110, 119	Automatic with HDTV Converter
MANUAL	Select up to 4	Manual

4. When the display shows the desired antenna type, press ✓ ACCEPT.

If you selected OVAL3, select the satellite pair to track: 101/110 or 101/119.

TRACK= 101/110?
 CHANGE ✓ ACCEPT

If you selected MANUAL, select your DIRECTV satellites. Refer to Section 4.1 of the User's Guide for details.

The antenna restarts automatically once setup is complete.

Setup DISH Network

Follow these steps to set up for DISH Network™ service. *If you need to change an existing setup, reset the system as explained in Section 4.5 of the User's Guide.*

TRACKING DTV 101 
SYSTEM NEEDS SETUP

1. Press any button to begin the setup process.

SERVICE= DIRECTV?
 CHANGE ✓ ACCEPT

2. Press CHANGE until the display shows "DISH".

SERVICE= DISH?
 CHANGE ✓ ACCEPT

3. Press ✓ ACCEPT.

ANTENNA= DISH500?
 CHANGE ✓ ACCEPT

4. Press CHANGE until the display shows the desired antenna type.

Antenna	Satellites Used	Satellite Switching
DISH500	119, 110	Automatic
MANUAL	Select up to 4	Manual

5. When the display shows the desired antenna type, press ✓ ACCEPT.

If you selected MANUAL, select your DISH satellites. Refer to Section 4.2 of the User's Guide for details.

The antenna restarts automatically once setup is complete.

6. After the antenna initializes, run the **Check Switch** function on your DISH Network receiver and ensure the receiver detects an SW42 switch. Refer to the end of Section 4.2 of the User's Guide for details.

Setup ExpressVu

Follow these steps to set up for ExpressVu service. *If you need to change an existing setup, reset the system as explained in Section 4.5 of the User's Guide.*

TRACKING DTV 101 
SYSTEM NEEDS SETUP

1. Press any button to begin the setup process.

SERVICE= DIRECTV?
 CHANGE ✓ ACCEPT

2. Press CHANGE until the display shows "EXPRESSVU".

SERVICE= EXPRESSVU?
 CHANGE ✓ ACCEPT

3. Press ✓ ACCEPT.

ANTENNA= SINGLE LNB?
 CHANGE ✓ ACCEPT

4. Press CHANGE until the display shows the desired antenna type.

Antenna	Satellites Used	Satellite Switching
SINGLE LNB	91	None (Unnecessary)
DUAL LNB	91, 82	Automatic
MANUAL	Select up to 2	Manual

5. When the display shows the desired antenna type, press ✓ ACCEPT.

If you selected MANUAL, select your ExpressVu satellites. Refer to Section 4.3 of the User's Guide for details.

The antenna restarts automatically once setup is complete.

TRACVISION®

KVH TracVision R6



KVH Industries, Inc.
50 Enterprise Center
Middletown, RI, 02842-5279

Phone: +1 401 847-3327

Fax: +1 401 849-0045

E-mail: info@kvh.com

Internet: www.kvh.com

©Copyright 2006, KVH Industries, Inc., All rights reserved.
KVH, TracVision, and DewShield are trademarks of KVH Industries, Inc.
DIRECTV is a registered trademark of DIRECTV, Inc.
DISH Network is a trademark of EchoStar Communications Corp.
ExpressVu is a property of Bell ExpressVu, a subsidiary of Bell Satellite Services.
All other trademarks are the property of their respective companies.


54_0325 RevA

Quick Start Guide


Welcome!

Congratulations! You have purchased the TracVision R6, the most advanced satellite TV antenna system available today. Refer to this handy quick reference guide for basic operation and setup instructions.

TracVision Serial Numbers

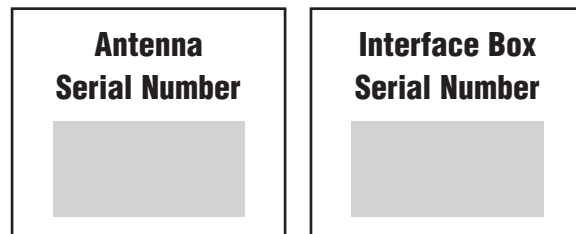


TracVision R6 System Diagram

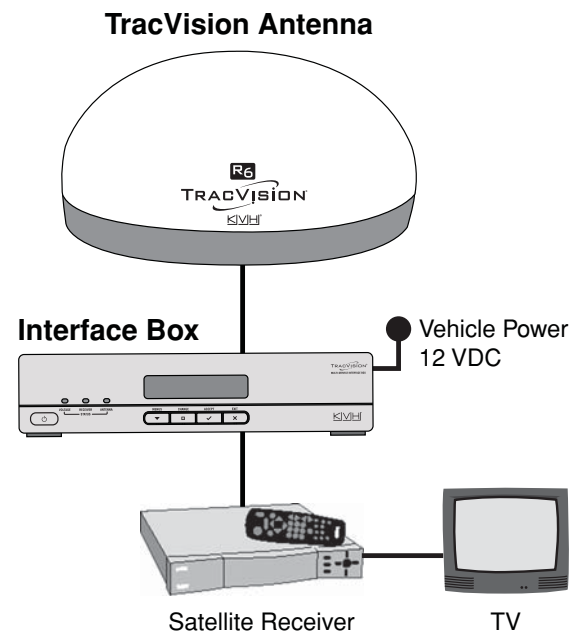

Receiving Satellite TV Signals

The antenna needs a clear view of the southern sky to receive satellite TV signals. Common causes of blockage include trees, buildings, and bridges. Heavy rain can also affect reception.

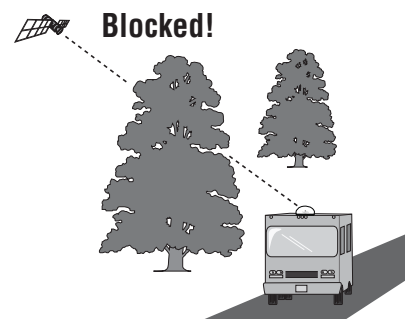


Basic Operation

Turning On the System

1. Park your vehicle in an area with a clear view of the southern sky, away from trees or tall buildings.
2. Turn on your satellite TV receiver and TV.
3. Press the Power switch on the front of the TracVision Interface Box.
4. Wait 1 minute for system startup.

Once the antenna finds the satellite, all 3 status lights should be lit solid green. *You can now start driving!* If any lights are NOT lit green, refer to Section 5 of the User's Guide for troubleshooting details.


Interface Box

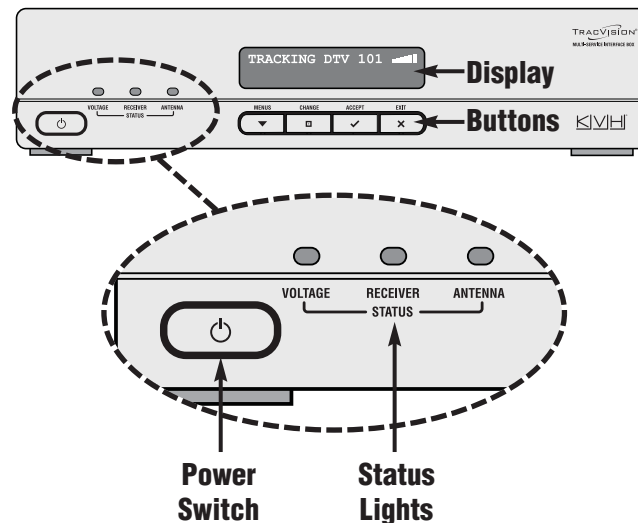

Turning Off the System

Press the Power switch on the front of the TracVision Interface Box.

Understanding the Status Screen

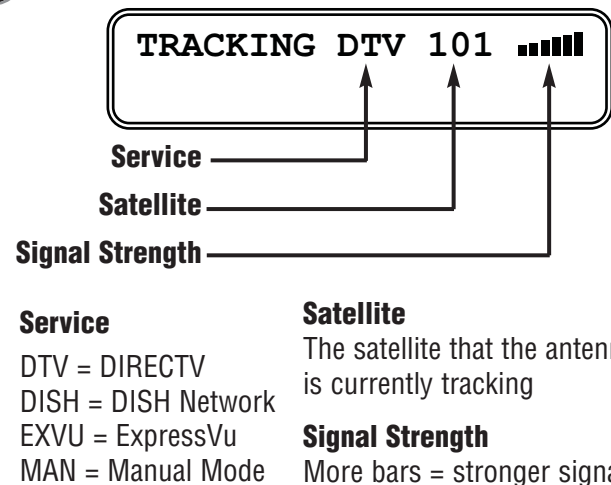

Switching Satellites

If your system is set up for multiple satellites, you can easily switch between them. Use the method below that applies to your particular setup. *See the reverse side of this guide for setup details.*

Automatic

TRACKING DTV 101 [Signal Strength Bars]

The antenna automatically switches satellites as you change channels using the receiver's remote control.

Automatic with HDTV Converter (DIRECTV)

TRACKING<101>/119 [Signal Strength Bars]
PUSH FOR 101/110

If the optional KVH HDTV converter for DIRECTV is installed, you can select between two satellite pairs:

- **101** (DIRECTV Primary) & **119** (DIRECTV Locals)
- **101** (DIRECTV Primary) & **110** (DIRECTV HDTV)


The selected pair appears at the top of the display and brackets (< >) surround the currently tracked satellite. The antenna automatically switches between the two satellites in the selected pair as you change channels using the receiver's remote control. *In the above example, the 101/119 pair is selected and the antenna is tracking the 101 satellite.*

Press CHANGE to switch to the other satellite pair.

Manual

TRACKING DISH 119 [Signal Strength Bars]
PUSH TO SWITCH SAT

Press CHANGE until the display shows the desired satellite.

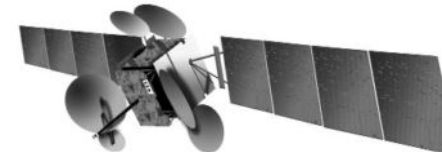

Menu Functions

Function	Settings	Description
DewShield	AUTO* OFF	Always set to AUTO so that DewShield™ keeps the antenna clear of dew. (Dew reduces reception.) Set to OFF only if you must conserve power.
Brightness	HIGH* MEDIUM LOW	Sets the brightness of the Interface Box display.
Set to Defaults	NO YES	Resets the above functions to their default settings.
Diagnostics	NO YES	See Section 5.3 of the User's Guide for details.

* Default setting

Changing a Setting

1. Press MENUS until the display shows the function you want to change.

BRIGHTNESS= HIGH
NEXT MENU CHANGE

2. Press CHANGE until the display shows the desired setting.

BRIGHTNESS= MEDIUM?
CHANGE ACCEPT

3. Press ACCEPT to accept the new setting.

BRIGHTNESS= MEDIUM

Exiting the Menu

Press EXIT to exit the menu. The display returns to the status screen.