



Section III. LIST OF NAVY TYPE NUMBERS

NAVSHIPS 900,109

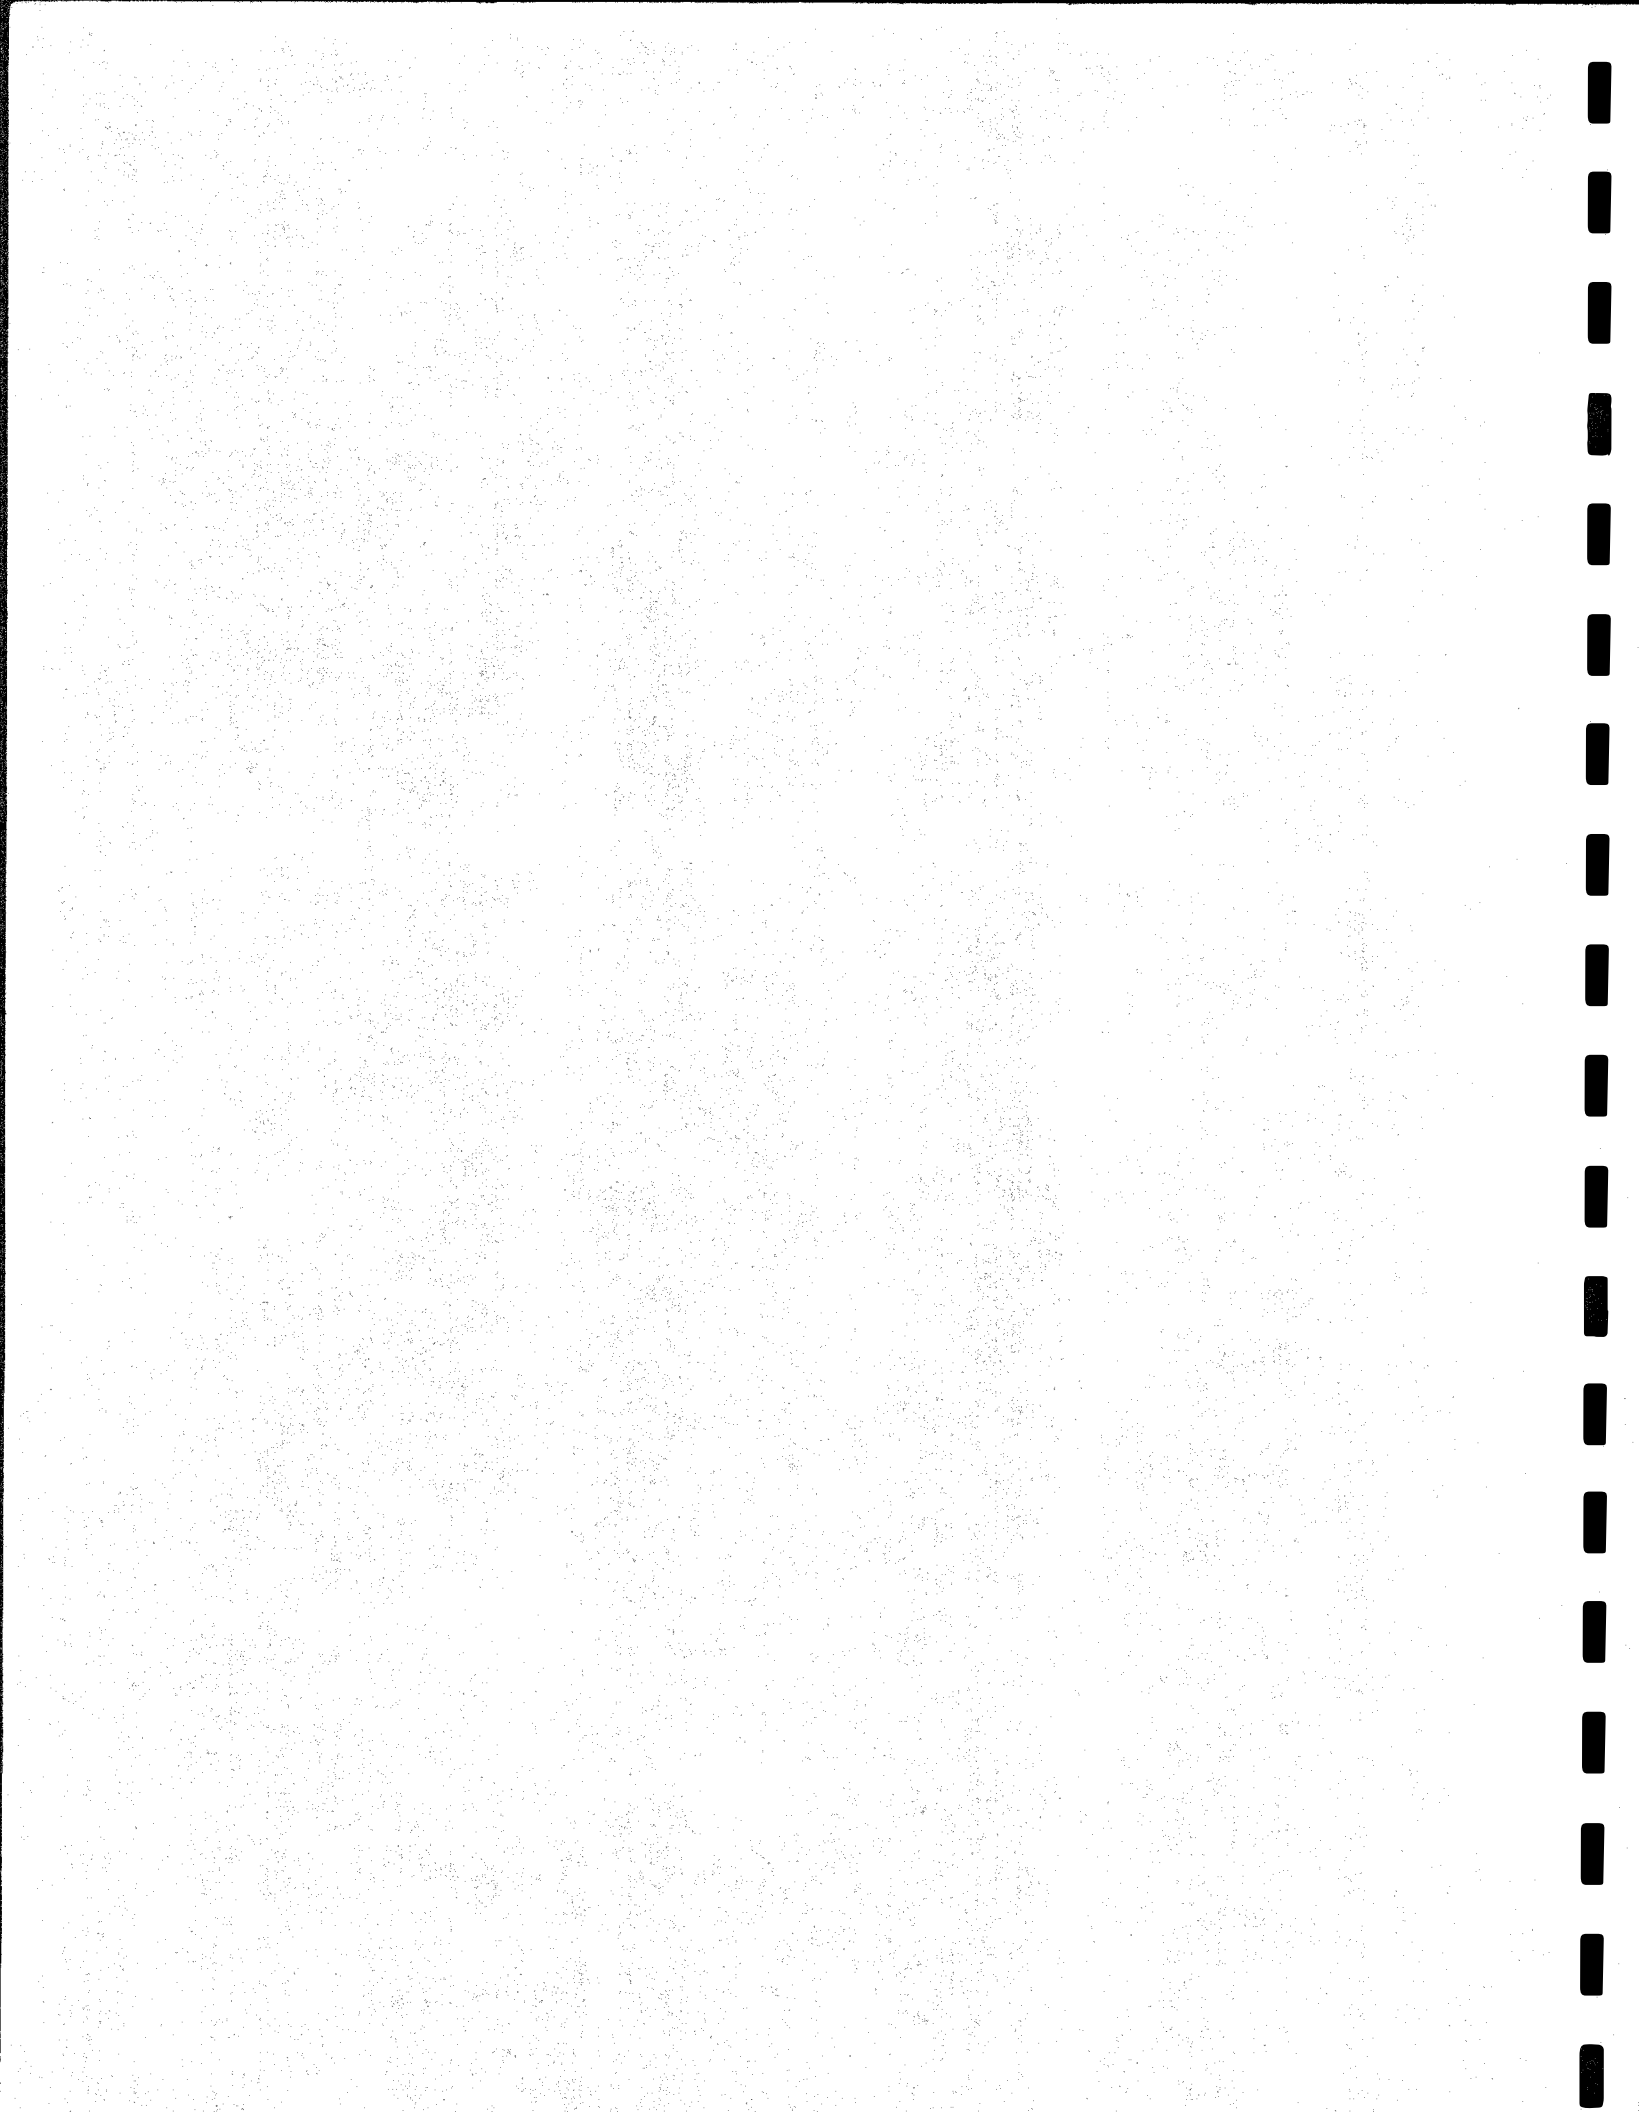

Section III. CLASSES 10 to 29

NAVSHIPS 900,109

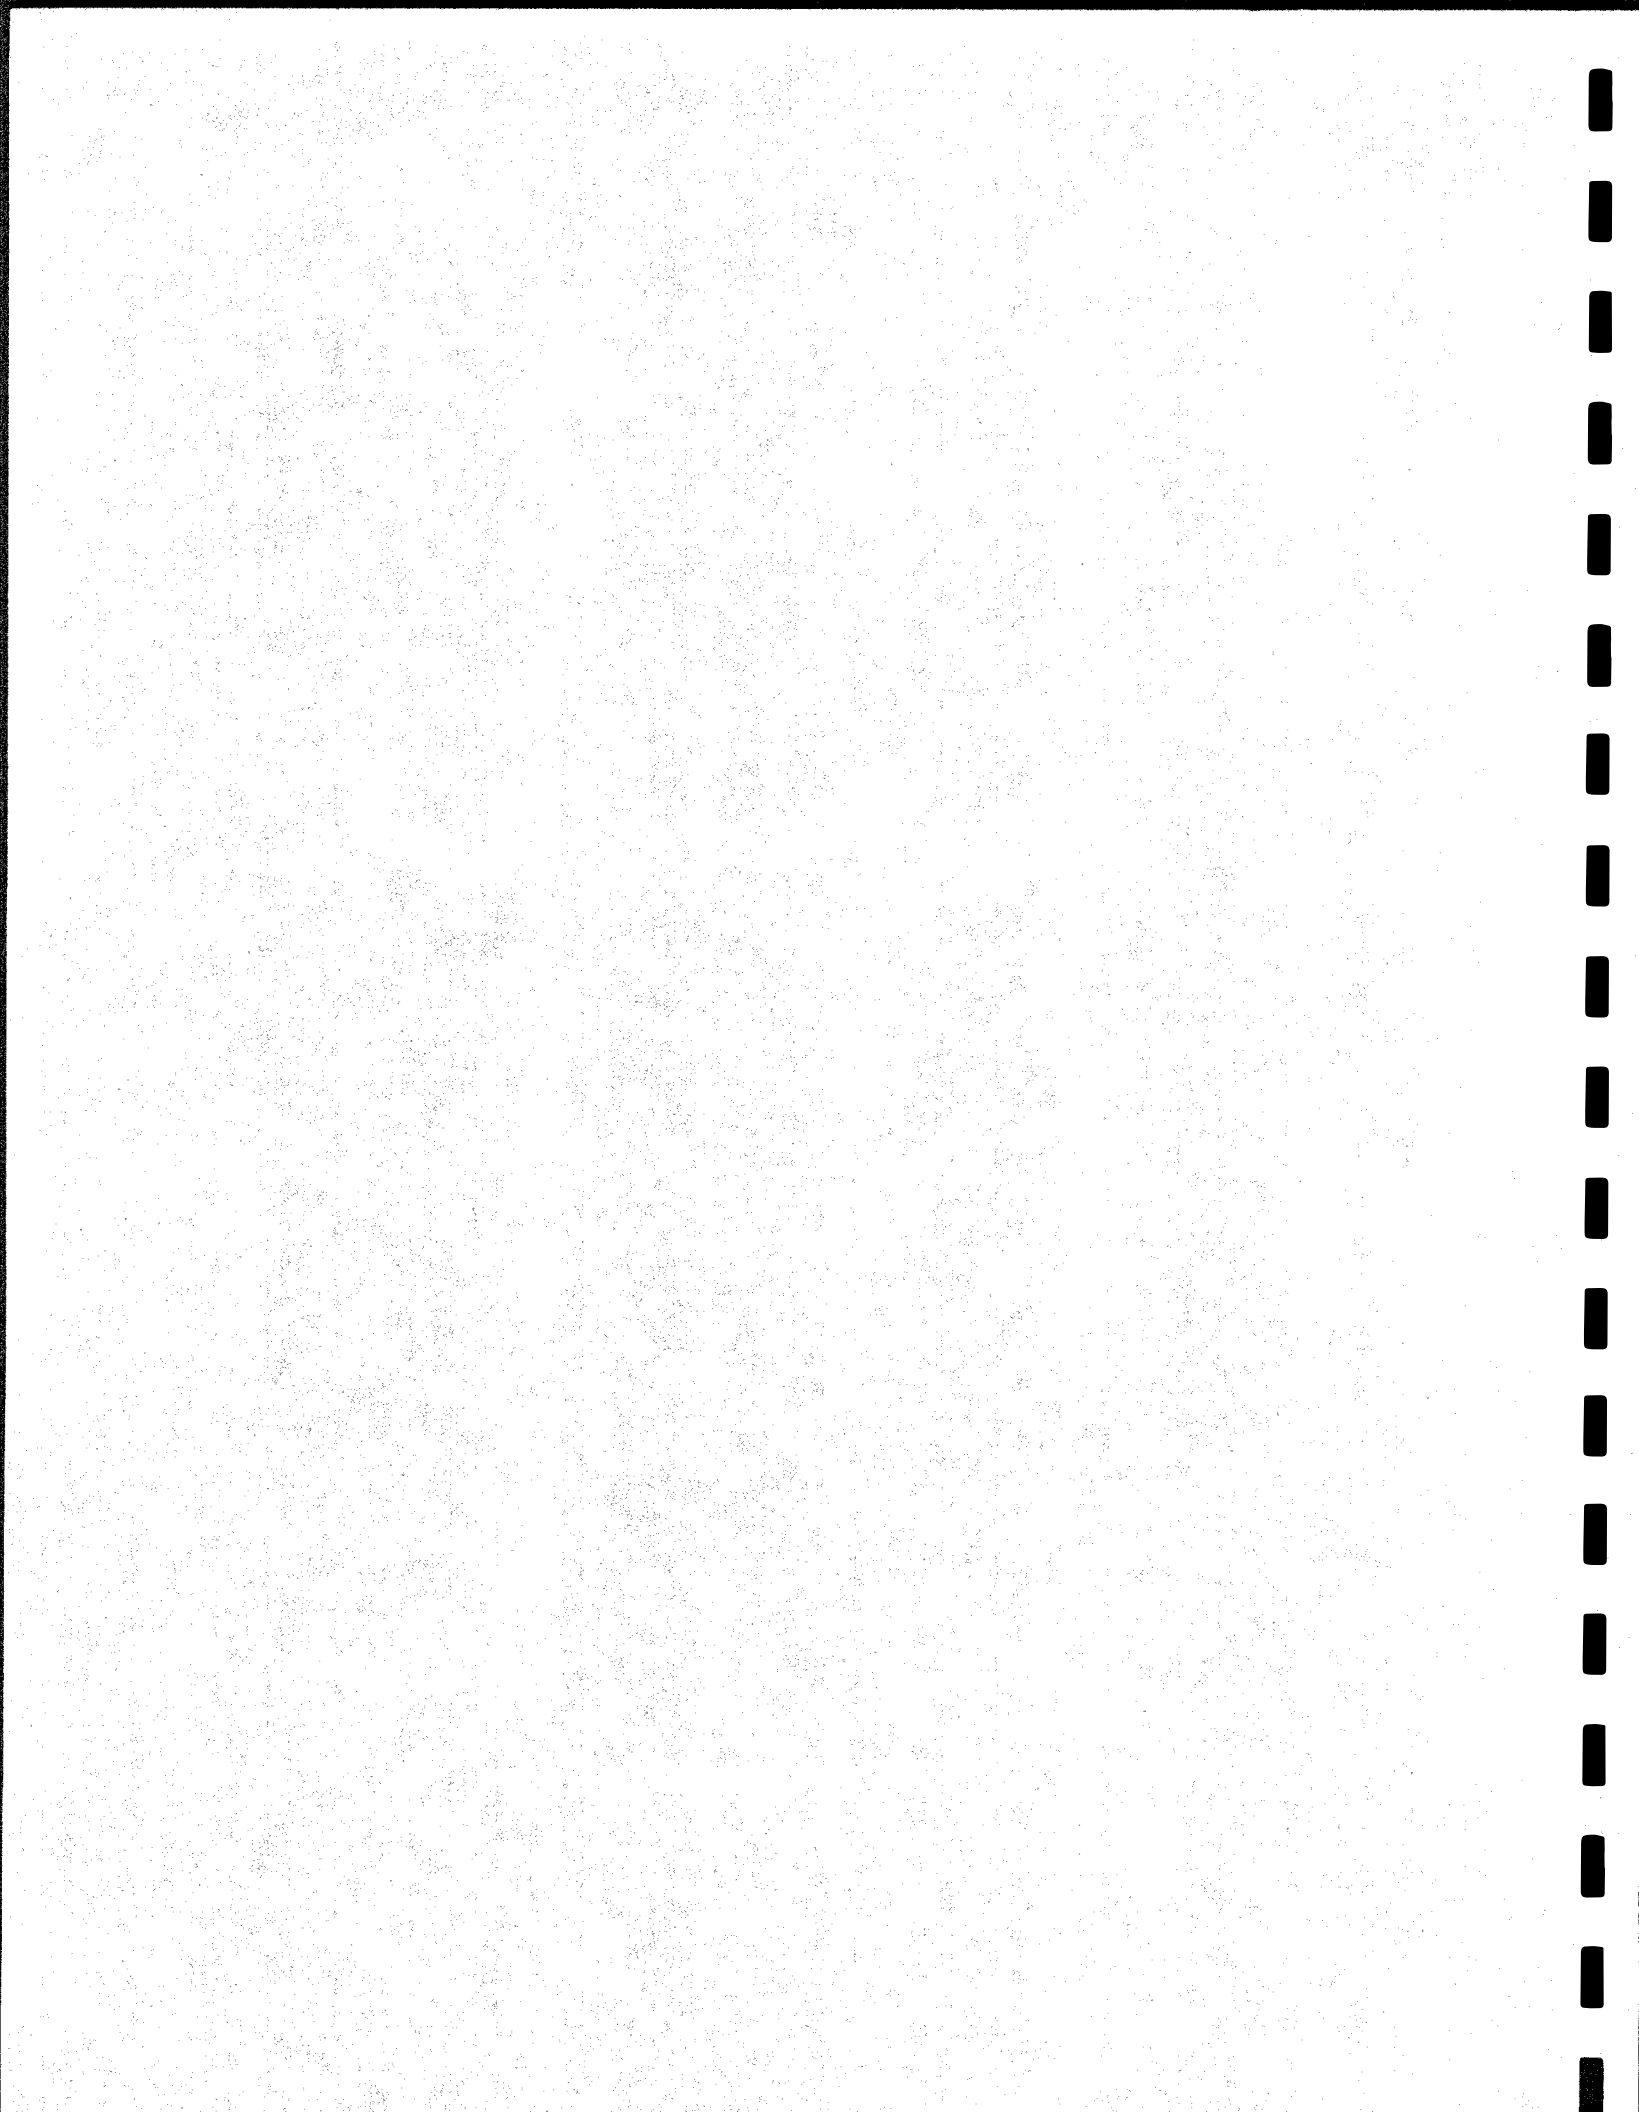


Class 10—Miscellaneous

CLASS 10

**MISCELLANEOUS
(TO BE USED IN CASE A DEFINITE
CLASSIFICATION IS NOT AVAILABLE)**

RESTRICTED

NAVSHIPS 900,109

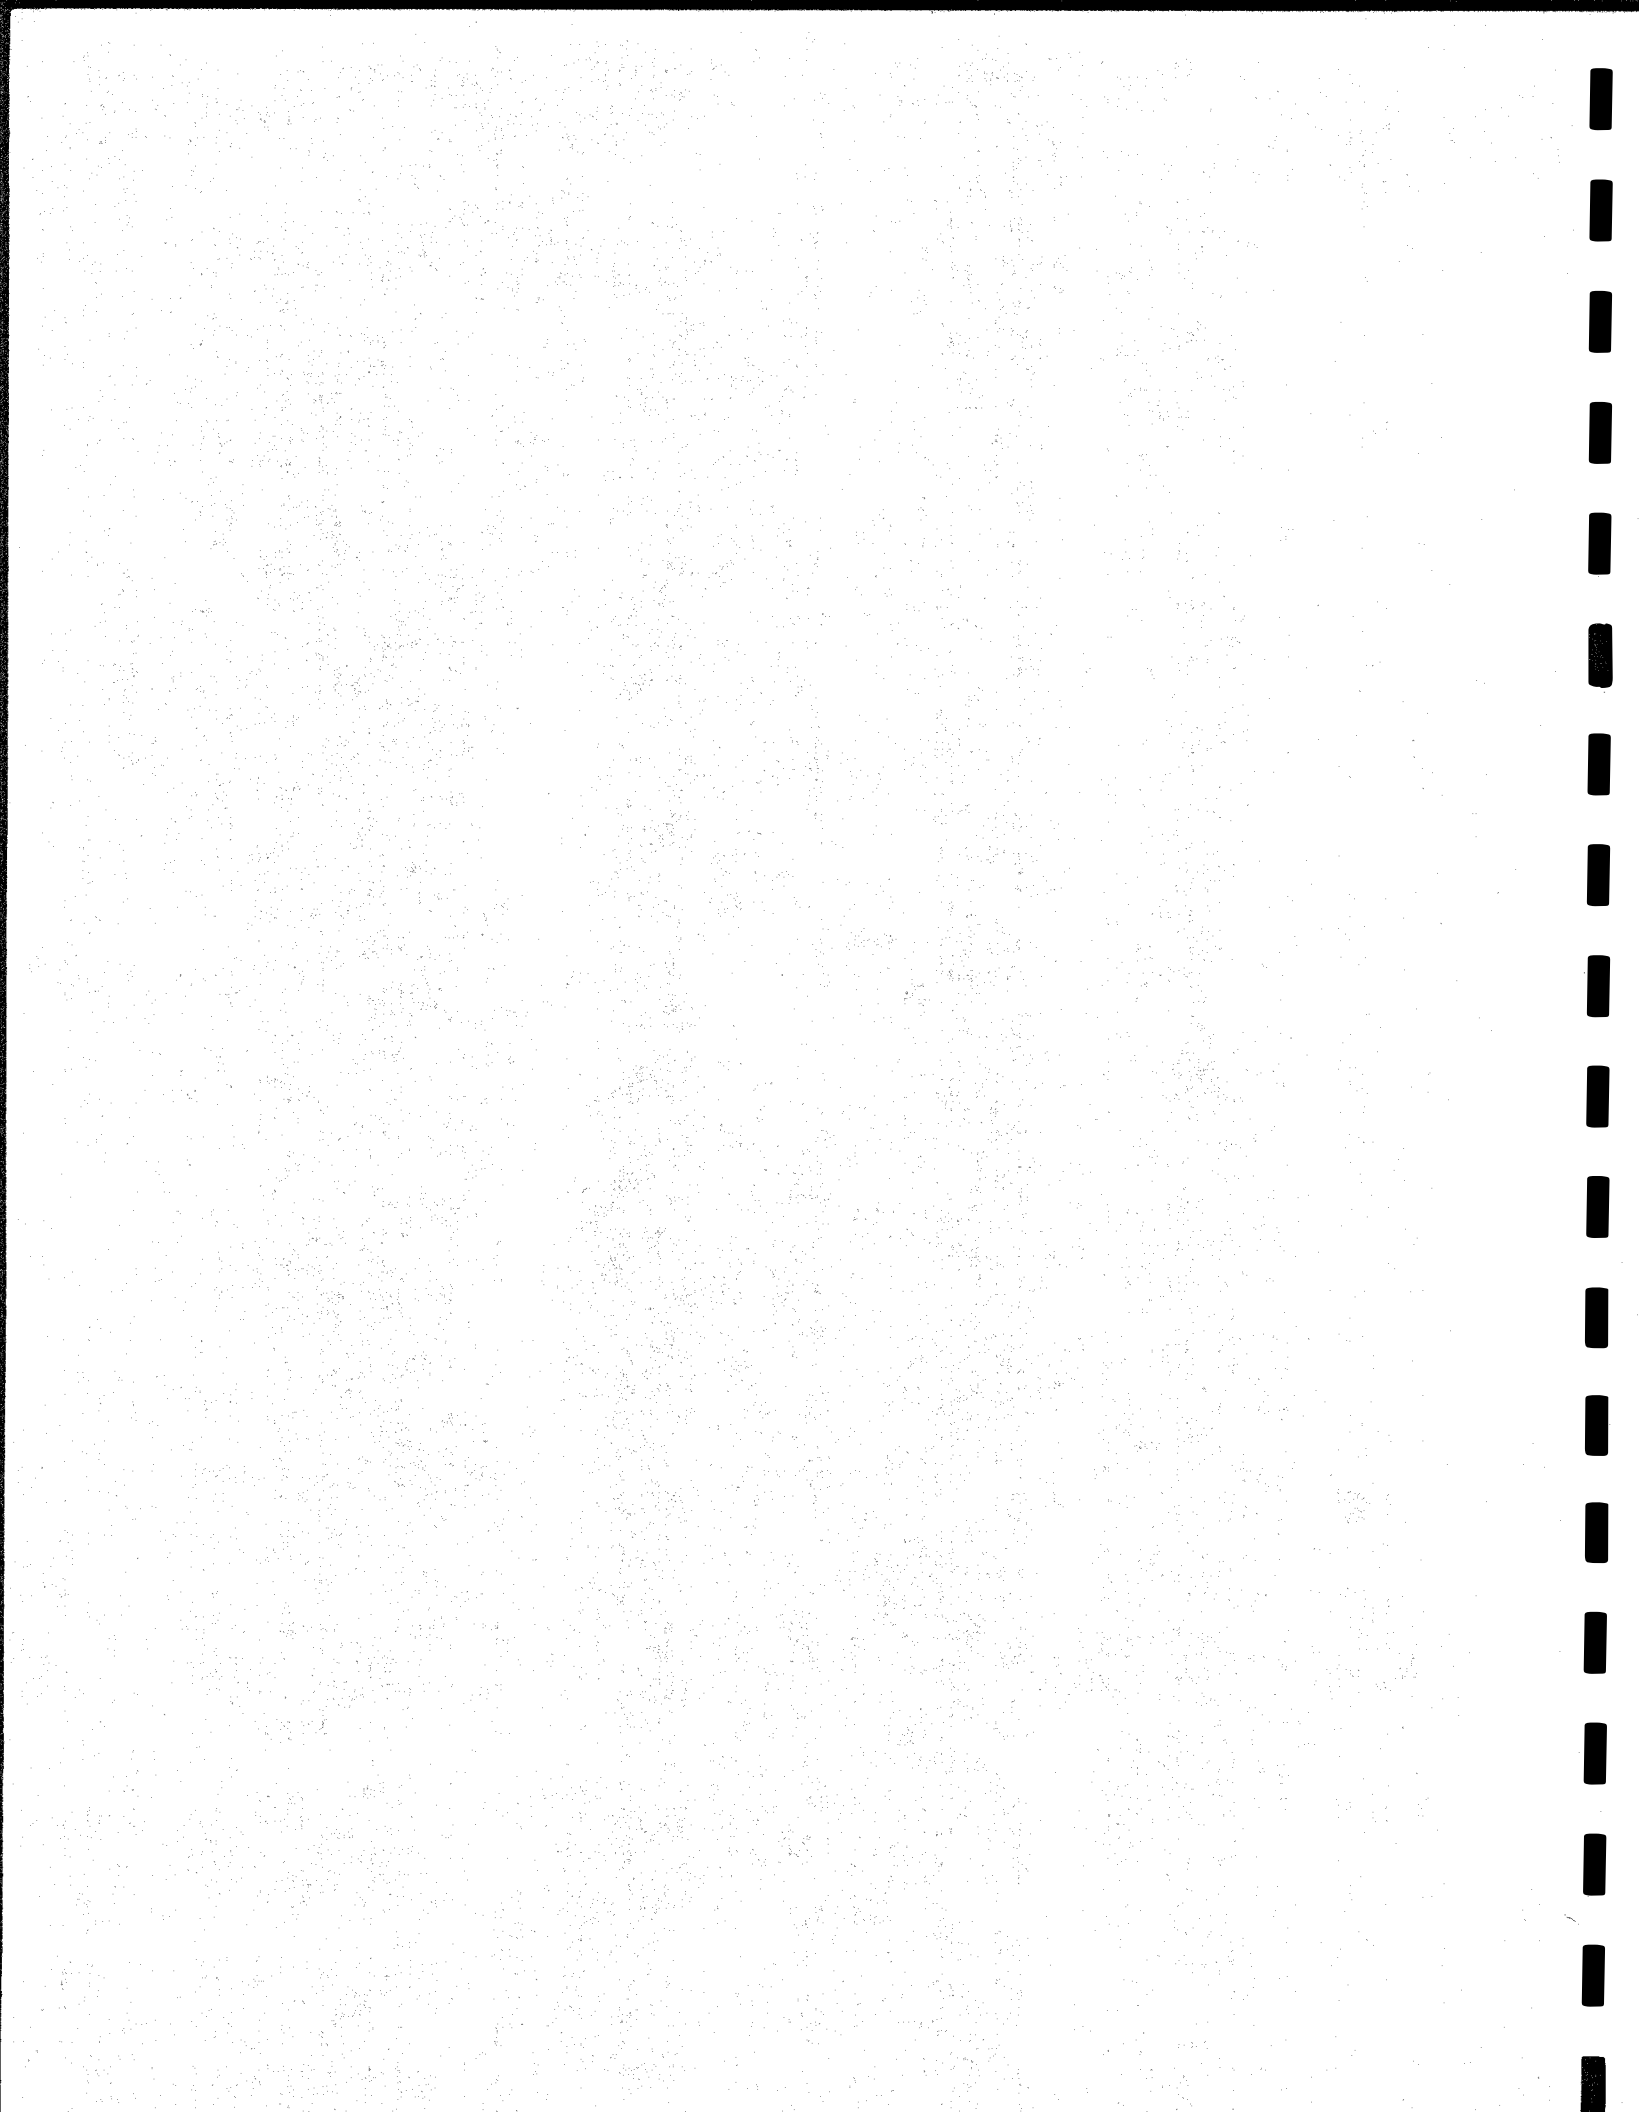

Class 10—Miscellaneous

3.10-1

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CG-10000 TBC WATER COOLING UNIT CONSISTS OF MOTOR, PUMP AND TANK.			CAY 10007 TAV-2 TRANSPORTATION CART		CAY-T-113	CW-10014 GP-1 MOUNTING TRACK		
12/29/31 NOV. 41		M-3675283	7/24/33 NOV. 41			2/3/36 NOV. 41		ESA-609091
CG-10000-A TBC-1 WATER COOLING UNIT CONSISTS OF MOTOR, TANK AND PUMP.			CAY 10007-A TAV-4 TRANSPORTATION CART		CAY-T-127	CVI 10015 HC-1, -1A, 1B PUMP AND TANK UNIT: MOTOR TYPE CLA-21213, 440 VOLTS AC.		
NOV. 43			5/1/36 NOV. 41			2/28/36 VICK 16803 NOV. 41 (CGM) 5888		RE 16302 RE 16316
CRY 10001 MK CRADLE UNIT			CBH 10008 QC-1 TELEPHONE CALL STATION AND BUZZER.		55RE10F1151	CVI 10016 HC-2 & HC-2A PUMP & TANK UNIT USES CLA-21179 MOTOR (220 V.A.C.)		
1/4/32 NOV. 43		MPR-1447	2/19/34 573 NOV. 41			4/24/36 NOV. 41		E-19385 & E-19391
CG-10002 TBB COOLING UNIT CONSISTS OF 115-VOLT MOTOR, PUMP AND TANK.			CG-10009 LJ-1 MOUNTING - SHOCK-PROOF			CWP 10017 TBO & TBO-1 SHIPPING CHEST FOR COMPLETE BASIC TBO OR TBO-1 EQUIPT.		
3/4/32 NOV. 41		M-7659076 PT. 1	4/19/34 NOV. 41			3/16/37 NOV. 41		M-7350645
CG-10003 TBB COOLING UNIT CONSISTS OF 250-VOLT MOTOR, PUMP & TANK			CVI 10010 QC-1 PUMP UNIT			CWP 10017-A TBX SHIPPING CHEST - FOR COMPLETE BASIC TBX EQUIPT. SIMILAR TO -10017 EXCEPT LARGER TO ACCOMMODATE LARGER COMPONENTS AND PADDED TO PROVIDE BOUYANCY.		
3/4/32 NOV. 41		M-7659076 PT. 2	8/1/34 588 NOV. 41			*CG DWG W-7350713-1 REV 0 8/22/33 NOV. 41		* SEE ABOVE & K-7987194 REV 0
CN-10004 CM MOUNTING - TRANSMITTER SHOCKPROOF			CG-10011 QC & NM LAMP, ARGON SIMILAR TO VG-2 WITH RESISTANCE IN BASE OMITTED; USED FOR PROTECTIVE DEVICE AT AMPLIFIER INPUT. (NOM VG-2B)			CFU 10017-B TBX-B SHIPPING CHEST SAME AS -10017-A EXCEPT ADDITIONAL COM- PARTMENTS ARE PROVIDED FOR EXTRA SPARE PARTS. OVERALL DIMENSIONS REMAIN UNCHANGED.		
3/22/32 NOV. 41		CN-G-115	3/18/35 NOV. 41			4/27/44 AUG. 44		
10005 GENERAL USE BUZZER HIGH FREQUENCY, 2 TO 4 VOLTS			CRY 10012 RAK & RAL WRENCH FOR REMOVING OR REPLACING COIL-SHIELD COVERS.			CWP-10017-C TBX-7 SHIPPING CHEST SAME AS -10017-B EXCEPT FOR REMOVAL OF VERTICAL BUFFERS FROM TRANSMITTER RE- CEIVER AND ACCESSORY BOX COMPARTMENT AND ADDITION OF A SECOND STRAP ACROSS TOP OF ANTENNA TRAY.		
3/16/33 NOV. 41		CJB/9740	6/12/35 NOV. 41		K-815970-501	10/5/44 DEC. 44		
CAY 10006 TAV-2 HAND DRIVE UNIT FOR USE WITH -21087 GENERATOR.			CVI 10013 QC-1A HYDRAULIC PUMP AND TANK UNIT.			CWP 10018 EF SHIPPING CHEST FOR TYPE CLC 18001 GASOLINE ENGINE AND TYPE CBF-21263 GENERATOR WITH ACCESSORIES.		
7/24/33 NOV. 41			7/12/35 NOV. 41			3/16/37 NOV. 41		M-7350644

RESTRICTED

NAVSHIPS 900,109

3.10-2

Class 10—Miscellaneous

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CWP 10018-A EF-1 (TBX) SHIPPING CHEST FOR GAS ENGINE UNIT. SIMILAR TO -10018 EXCEPT FOR THICKNESS OF FILLER STRIP. SEE SECTION A-A OF W-7350644.			CWP 10024 EG & EH SHIPPING BOX FOR COMPLETE EG OR EH MOTOR GENERATOR EQUIPMENT.			CSK 10027-A TBX CANVAS COVER FOR TRANS.-REC. UNIT OR ACCESSORY BOX. SIMILAR TO -10027 EXCEPT REINFORCED WITH LEATHER AND PADDED WITH KAPOK.		
* CG W-7350644-18 REV 5 8/22/39 NOV. 41			3/23/37 NOV. 41		T-7660483	*CG/P-7762133 REV 1 8/21/39 NOV. 41		*SEE ABOVE & K-7874409 REV 1
CFU 10018-B EF-4 (TBX-4) SHIPPING CHEST SAME AS -10018-A EXCEPT FOR INTERNAL RE-ARRANGEMENT OF COMPARTMENTS TO PROVIDE SPACE FOR CGW-211202 GENERATOR. EXTERNAL DIMENSIONS ARE UNCHANGED.			CWP 10024-A TBX-6 SHIPPING BOX FOR COMPLETE EG OR EH MOTOR GENERATOR EQUIPMENT. SAME AS -10024 EXCEPT HAS NEW TYPE HANDLES, HINGES ON OUTSIDE OF BOX AND RIVETS USED INSTEAD OF SCREWS.			CSK 10028 C8F-21263 CARRYING CASE CANVAS WITH SEPARABLE CARRYING STRAP FOR GENERATOR SET.		
2/29/44 MAR. 44			11/26/43 NOV. 43		T-7663053P-1 REV 0	3/23/37 NOV. 41		
CG-10019 EF BED PLATE FOR USE WITH TYPE CLC-18001 GAS ENGINE & TYPE CBF-21263 D.C. GENERATOR.			CWP 10025 CG-21265 SHIPPING BOX FOR DYNAMOTOR & SPARES.			CSK 10028-A -21263A/TBX CANVAS COVER FOR HAND GENERATOR UNIT. SIMILAR TO -10028 EXCEPT HAS SUSPENDERS INSTEAD OF SINGLE SHOULDER STRAP AND IS PADDED WITH KAPOK TO PROVIDE BOUYANCY.		
3/23/37 NOV. 41		7660507 G1	3/23/37 NOV. 41			*CG/P-7762131 REV 1 8/21/39 NOV. 41		*SEE ABOVE & K-7874409 REV 1
CSK 10020 EF CANVAS COVER FOR FIELD SERVICE PROTECTION.			CWP 10025-A -21265A TBX SHIPPING BOX FOR DYNAMOTOR & SPARES. SIMILAR TO -10025 EXCEPT LARGER TO ACCOMMODATE SPARES.			CSK 10029 CG-66004 CARRYING CASE CANVAS FOR FLAGELIFORM ANTENNA SET.		
3/23/37 NOV. 41			8/22/39 NOV. 41		CG/T-7660932-1 REV 0	3/23/37 NOV. 41		
CSK 10020-A EF-1 (TBX) CANVAS COVER FOR GASOLINE ENGINE UNIT. SIMILAR TO -10020 EXCEPT DOES NOT INCLUDE SIDE TO COVER BASE.			CWP 10025-B TBX-6 SHIPPING BOX SIMILAR TO -10025-A EXCEPT HAS NEW HANDLES, HINGES ON OUTSIDE OF BOX AND RIVETS USED INSTEAD OF SCREWS.			CSK 10029-A TBX CANVAS COVER FOR ANTENNA SYSTEM. SIMILAR TO -10029 EXCEPT PA0050 WITH KAPOK TO PROVIDE BOUYANCY.		
*CG P-7762134 REV 1 8/22/39 NOV. 41		*SEE ABOVE & K-7874409 REV 1	9/7/43 NOV. 43		CG/T-7663082P1 REV 0	*CG/P-7762130 REV 2 8/21/39 NOV. 41		*SEE ABOVE & K-7874409 REV 1
CCB 10021 EF COUPLING FOR COUPLING TYPE CLC-18001 GASOLINE ENGINE TO TYPE C8F-21263 D.C. GENERATOR			CG-10026 T80 & T80-1 ACCESSORY BOX TO CONTAIN BATTERIES & ANTENNA GEAR.			CG-10030 T8R & T8R-1 TRANSPORTATION CART 32" HIGH, BODY 71" LONG X 40-3/4" WIDE.		
3/23/37 NOV. 41			3/23/37 NOV. 41			7/7/38 NOV. 41		PHOTO: A-90377
CTS 10022 EG & EH COUPLING FOR COUPLING TYPE CG-21269 OR CG-21270 MOTORS TO TYPE CG-21271 GENERATOR.			CG-10026-A TBX ACCESSORY BOX SAME AS -10026 EXCEPT NAMEPLATES AND POWER SOCKET ARE ON END IN PLACE OF SIDE			CBM 10031 JK-4 & QCH 55RE10J1155A TRAINING UNIT USES -21307 TRAINING MOTOR & -21317 GEAR REDUCTION UNIT.		
3/23/37 NOV. 41			8/22/39 NOV. 41		CG/T-7660923-1 REV 0	7/7/38 776A NOV. 41		CBM DWG. 766A ALT 2
CG-10023 EG & EH BED PLATE INCLUDING PROTECTING SHIELD.			CSK 10027 *SEE BELOW CARRYING CASE CANVAS FOR EITHER TRANSMITTER-RECEIVER SET OR ACCESSORY BOX.			CNA 10032 RAO MOUNTING RACK FOR USE WITH TYPE 46072 RECEIVER UNIT AND 49092 LOUD SPEAKER		
3/23/37 NOV. 41		P4269602	*CG-43003 & 10026(T80). 3/23/37 NOV. 41			9/7/38 NOV. 41		

Class 10—Miscellaneous

3.10-3

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CMH 10033	TBC-2		CSU 10039	TBP		RW- 10044	DY	
COOLING UNIT			CANVAS CARRYING CASE			CANVAS COVER		
CONSISTS OF MOTOR, PUMP AND TANK.			SEPARATE COMPARTMENTS ARE PROVIDED FOR			FOR NAVY TYPE RW-10045 SUPPORTING TOWER.		
250/3/60 INPUT			THE (1) TRANSMITTER-RECEIVER UNIT AND					
			BATTERY (2) HEADPHONE MICROPHONE & KEY					
			AND (3) ANTENNA USING ZIPPER & SNAP					
			FASTENERS APPROXIMATELY 2-3/4 LBS.					
10/18/38 TCC:		88455 REV 3	11/9/39		CAT/P-7707158	11/24/39		
JUNE 42			NOV. 41		SUB 0	NOV. 41		
CAY 10034	TBM		10039-A	TBY-4		RW- 10045	DY	
SPARE PARTS BOX			CANVAS CARRYING CASE			SUPPORTING TOWER		
WATER PROOF CONSTRUCTION & OVERALL			SAME AS BASIC NUMBER EXCEPT ALTERED TO			INCLUDES BEARINGS. SUPPORTS COMPLETE		
DIMENSION 12-3/4" X 15-1/8" X 25-5/8"			IMPROVE ACCESSIBILITY.			EQUIPMENT.		
7/26/39		P-7707910 REV 0	3/15/43		E-48775	11/24/39		
NOV. 41			NOV. 43		REV 1	NOV. 41		
CBM 10035	JK-7& QCH-1	55RE10J1156A	CCS 10039	E TBY-6		CAG 10046	OH	
TRAINING UNIT			CANVAS CARRYING CASE:			ACCESSORY BOX		
SIMILAR TO TYPE CBM-10031 BUT ARRANGED			SEPARATE COMPARTMENTS ARE PROVIDED FOR					
FOR EITHER HORIZONTAL OR VERTICAL			1. TRANSMITTER-RECEIVER UNIT AND BATTERY					
MOUNTING; INCLUDES CBP-21357 TRAINING			2. HEADPHONE MICROPHONE AND KEY AND					
MOTOR AND CBH-21317 GEAR REDUCTOR.			3. ANTENNA; USING ZIPPER AND SNAP FAST-					
			ENERS. SAME AS -10039-A EXCEPT HEIGHT OF					
			ANTENNA COMPARTMENT INCREASED FROM					
8/28/39 776B		CBM DMC.	7/7/43		CCS-E-51932	1/3/40		P-501A REV 0
NOV. 41		6906 ALT 0	SEPT 43		REV 0	NOV. 41		
CBM 10035A	JKA-5A	55RE 10J 1158	1" TO 1 1/2".		CCS 10039-B	RW- 10047	OY-1	RW 69F 155B
TRAINING UNIT: IDENTICAL						PORTABLE HOUSE		
TO CBM-10035 EXCEPT THAT IN FURNISHING								
THIS UNIT FOR INSTALLATION ON SS209 TO								
211 INCLUSIVE, THE LENGTH OF THE SLOW								
SPEED SHAFT OF THE GEAR REDUCTOR HAS								
BEEN REDUCED, DUE TO LIMITED INSTALLA-								
TION SPACE.								
10/22/40 7760		CBM:6691 ALT 2				6/24/40		
NOV. 41		7760				NOV. 41		
CBM 10035-B	NCA-2		RW- 10040	DT & DT-1		RW- 10048	DY-1	
TRAINING UNIT			STEP LADDER			STEP LADDER		
SAME AS -10035-A EXCEPT TRAINING MOTOR								
HAS MALLEABLE IRON END BELLS, INSTEAD OF								
CAST IRON AND STEEL FRAME. COMPENSATING								
CHANGES HAVE BEEN MADE IN THE WINDINGS								
BECAUSE OF THE DIFFERENCE IN THE								
MAGNETIC CHARACTERISTICS OF THE MATERIALS								
8/7/43 776 H		6991	11/24/39			6/24/40		
NOV. 43		ALT 4	NOV. 41			NOV. 41		
CMA 10036	RAS & RAW		RW- 10041	DT & DT-1		CBM 10049	QCH	55RE10J1157A
MOUNTING RACK			CANVAS COVER			TRAINING UNIT		
FOR HOUSING RECEIVER UNIT, POWER UNIT,			FOR NAVY TYPE RW-69035 DIRECTION FINDER			SAME AS CBM-10035 EXCEPT SUBSTITUTES		
SPEAKER AND COIL CONTAINER.			UNIT.			A CBP-21473 MOTOR WHICH OPERATES FROM		
						250 TO 10 VOLTS DC AND REQUIRES 3 AMPS		
						EXCITATION FROM 90 TO 160 VOLTS DC.		
11/12/39			11/24/39			6/28/40 776C		CBM DMC
NOV. 41			NOV. 41			NOV. 41		6906 ALT 0
CNA 10037	RAS & RAW		RW- 10042	DT & DT-1		CFP 10050	GENERAL USE	RA 62F 229
COIL SYSTEM CONTAINER			SUPPORTING TOWER			AUTOMATIC BLEEDER VALVE:		
FOR HOUSING 6 COIL SETS. FOR RACK			INCLUDES BEARINGS AND FIXED AZIMUTH			ADJUSTABLE TO OPEN BETWEEN 7 & 35 LBS		
MOUNTING.			SCALE. SUPPORTS COMPLETE EQUIPMENT.			PER SQUARE INCH & TO CLOSE WITH A SIX		
						POUND DIFFERENTIAL.		
11/12/39			11/24/39			8/28/40		
NOV. 41			NOV. 41			JULY 43		
CAY 10038	TBP		RW- 10043	DY		CGM 10051	YC	
SHIPPING CHEST			STEP LADDER			TOWING & SERVICE TRUCK		
OVERALL DIMENSIONS: 20" LONG X 16-7/16"						GENERAL MOTORS CO. CHASSIS MODEL 252		
DEEP X 10-7/8" HIGH. WEIGHT						(1940) WITH STANDARD TYPE 992 PANEL BODY		
APPROXIMATELY 25 LBS; CONSTRUCTED OF								
THICK DRAWN SHEET STEEL 0.040 INCHES								
DEEP. EXTERNAL FINISH OLIVE GREEN								
WRINKLE; INTERNAL ALUMINUM.								
11/9/39		P-7707161 SUB 0	11/24/39			9/23/40		CDE/2626 REV 0
NOV. 41			NOV. 41			NOV. 41		

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	----------	------	----------------------------	-------------------------------	----------	------	----------------------------	-------------------------------

RESTRICTED

NAVSHIPS 900,109

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CHJ 10052 YC TRAILER PROVIDES FACILITIES FOR MOUNTING ENTIRE EQUIPMENT.			CBM 10060 QCM-2 TRAINING UNIT IDENTICAL WITH CBM-10035A EXCEPT THE TERMINAL BOX OF THE TRAINING MOTOR IS ON OPPOSITE SIDE, AS IS ALSO THE LIMIT SWITCH & COUPLING OF THE SLOW SPEED SHAFT OF THE GEAR REDUCTOR. NECESSITATED BECAUSE OF LIMITED INSTALLATION SPACE.	55RE10J1159		CC- 10067 TBC-3 RAW WATER PUMP UNIT CONSISTS OF A TYPE CG-21659 115/230/3/60 MOTOR, TYPE CWR-10063 CENTRIFUGAL PUMP, TYPE CNS-10064 VACUUM PUMP AND BEDPLATE.		
9/23/40 NOV. 41		CDE/4070 REV 0	10/22/40 776E NOV. 41	CBM DVG 6991 ALT 3; 776E		7/15/41 NOV. 41	K-7878840-P3	CG/M-7465613 REV 0
CHA 10053 YD MOTOR CYCLE (& SIDE CAR CHASSIS) HARLEY DAVIDSON TYPE MWC (1940) PACKAGE TRUCK CHASSIS.			CBM 10060-A WCA-2 TRAINING UNIT: SAME AS BASIC NUMBER EXCEPT THAT THE TRAINING MOTOR HAS MALLEABLE IRON END BELLS. INSTEAD OF CAST IRON, AND A STEEL FRAME. WINDINGS HAVE BEEN CHANGED BECAUSE OF DIFFERENCES IN THE MAGNETIC CHARACTERISTICS OF THE MATERIALS.			CG- 10068 TBC-3 PURE WATER PUMP UNIT CONSISTS OF A TYPE CG-21659 220/440/3/25 MOTOR, TYPE CWR-10066 CENTRIFUGAL PUMP, TYPE CNS-10064 VACUUM PUMP AND BEDPLATE.		
9/23/40 NOV. 41		CDE/2340 REV 0	8/7/43 776 J NOV. 43	CGM:60046 ALT 1		7/15/41 NOV. 41	K-7878840-P2	CG:M-7465612 REV 2
CWM 10054 YD EQUIPMENT HOUSING PROVIDES FACILITIES FOR MOUNTING ENTIRE EQUIPMENT.			CTP 10061 TEL. RECORD. RE 13A 628 PAPER TAPE, UNGUMMED UNGUMMED PAPER TAPE 3/8" WIDE, WHITE, INK-RECORDING. ROLL MAX OIA. 8 1/2". WOOD CORE 2" DIAMETER. (XA-8817).			CGM 10069 YC-1 TOWING & SERVICE TRUCK		
9/23/40 NOV. 41		CDE/2341 REV 0	5/28/41 JULY 43			7/18/41 NOV. 41		CDO/2626 REV 0
CTP 10055 TEL. KEYING GUMMED TAPE 3/8" WIDE; 8" DIAMETER ROLL; 1100 FEET.			CG- 10062 TBC-3 RAW WATER PUMP UNIT. CONSISTS OF TYPE CG-21657 220/440/3/25 MOTOR, TYPE CWR-10066 CENTRIFUGAL PUMP, TYPE CNS-10064 VACUUM PUMP AND BEDPLATE.			CMJ 10070 YC-1 TRAILER PROVIDES FACILITIES FOR MOUNTING ENTIRE EQUIPMENT.		
10/16/40 DEC. 41			7/15/41 NOV. 41	K7878840-P4 CG/M7465614 REV 0		7/18/41 APR. 42		CDE:2974 REV 0
CTP 10056 TEL. KEYING TWO COPY GUMMED TAPE GUM PAPER TAPE 3/8" WIDE, ASSEMBLED FOR MAKING A CARBON COPY ROLL DIAMETER 8".			CWR 10063 TBC-3 CENTRIFUGAL PUMP RATED 150 GPM AT 100 FOOT HEAD AT 1725 RPM.			CHA 10071 YD-1 MOTOR CYCLE & SIDE CAR CHASSIS.		
10/16/40 DEC. 41			Ø REV 0 & CWR:SK-44494, 3/11/35. 7/15/41 2-1/2-R-2 DEC. 41	CG/M-7465613 Ø SEE ABOVE		7/18/41 NOV. 41		CDE/2340 REV 0
RA- 10057 OL BOX FITTING UNIVERSAL, DESTROYER TYPE.			CNS 10064 TBC-3 VACUUM PUMP			CWM 10072 YD-1 EQUIPMENT HOUSING PROVIDES FACILITIES FOR MOUNTING ENTIRE EQUIPMENT.		
10/16/40 NOV. 41		7F105	Ø CNS:NDB-48; CG:M-7465614 REV 1 7/15/41 HYTOR APRIL 42 SIZE PBS	Ø SEE ABOVE		7/18/41 NOV. 41		CDE/2341
RA- 10058 OL BULL NOSE CLAMP			CG- 10065 TBC-3 PURE WATER PUMP UNIT CONSISTS OF A TYPE CG-21660 115/230/3/60 MOTOR, TYPE CWR-10066 CENTRIFUGAL PUMP, TYPE CNS-10064 VACUUM PUMP AND BEDPLATE.			CCF 10073 FC & FD BLOWER RATED 85 CUBIC FEET PER MINUTE, CLOCK-WISE ROTATION 2850 RPM. INCLUDES A NAVY TYPE -21670 BLOWER MOTOR.		
10/16/40 NOV. 41		7F105	7/15/41 NOV. 41	K-7878840-P1 CG/M7465611 REV 0		7/25/41 NOV. 41		00 CW BHD
RA- 10059 OL SUPPORT PIPE			CWR 10066 TBC-3 CENTRIFUGAL PUMP RATED 300 GPM AT 100 FOOT HEAD AT 1725 RPM, OR 150 GPM AT 100 FOOT HEAD AT 1425 RPM.			CCP 10074 TCC PUMP UNIT CONSISTS OF A CAM PUMP AND A DRIVING MOTOR. CAM PUMP IS RATED 3GPM, 30#/SQ. IN. DISCHARGE PRESSURE, 1140 RPM CONTINUOUS. MANUFACTURERS DESIGNATION FOR PUMP IS 20 X 20-RC. DRIVING MOTOR IS G.E. TYPE 5KC48A246, 1/4 HP.		
10/16/40 NOV. 41		7F105	7/15/41 NOV. 41	3-L-3 CG/M-7465611 REV 0		7/28/41 NOV. 41		CCP/215888 CG/M-5051426

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

Class 10—Miscellaneous

3.10-5

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
115/230/1/60 1140 RPM, WITH SPECIAL RABBIT ON END PLATE.		CCP10074	CRV 10082 ATB TRANSMITTER MOUNTING BASE RIGHT. SHOCK MOUNTING BASE.	12/8/41 JUNE 42	M-421835-501 SUB 3	ANTENNA INSTALLED IN GLIDER, MATCHING DEVICE TO PERMIT OPERATION OF LOW IMPEDANCE PHONES FROM HIGH RECEIVER OUTPUT IMPEDANCE. BOWDEN CONTROL FOR SEND-RECEIVE OPERATION OF SET.		CGC 10088
CNA 10075 RBL COIL SYSTEM CONTAINER PROVIDES FACILITIES FOR HOUSING 10 COIL SETS.			CRV 10083 ATB TRANSMITTER MOUNTING BASE LEFT. SHOCK MOUNTING BASE.	12/8/41 JUNE 42	M-421835-502 SUB 3	CGC 10089 ANA REMOTE CONTROL LEVER; THROTTLE TYPE, FOR INSTALLATION ON EITHER RIGHT OR LEFT SIDE OF GLIDER. OPERATES PUSH-TO-TALK SWITCH ON CGC-43018 TRANSMITTER RECEIVER UNIT BY MEANS OF MECHANICAL COUPLING.		CGC:63034908
9/4/41 NOV. 41			CRV 10084 ATB DYNAMOTOR-FILTER BASE SIZE 5-1/2 BY 7-1/4 INCHES WITH MOUNTING HOLES.	12/8/41 JUNE 42	M-421173-501 SUB 8	CPZ 10090 JM-1 TRANSMITTER BUOY:		
CAY 10076 TBM-2 SPARE PARTS BOX WATERPROOF CONSTRUCTION. OVERALL DIMENSIONS 20-1/8" LONG X 13-1/8" WIDE X 12-3/4" HIGH.			CRV 10085 ATB TUNING UNIT CARRYING CASE CASE 5-5/8 BY 7-3/8 BY 11-5/8" LONG, WITH HANDLE.	12/8/41 JUNE 42	T-620455-501 SUB 2	CPZ 10093 JM-1 BATTERY CONTAINER		
9/12/41 DEC. 41	P-7708198 SUB 0		CRR 10086 LM-9 WATER-PROOF CARRYING CASE FOR HOUSING NAVY TYPE CRR-74024 RF HETERODYNE FREQUENCY METER.	12/7/41 MAR. 43	R95990	CGW 10094 UHF RCC HARMONIC GENERATOR ALARM PANEL: ALARM FOR TYPE CW-35022 HARMONIC GENERATOR. PRODUCES AUDIBLE OR VISUAL SIGNAL IN CASE THE HARMONIC GENERATOR OUTPUT FAILS. (PART OF ITEM CS-1) OPERATES WHEN OUTPUT VOLTAGE DROPS BELOW 7 VOLTS.		
10077 OS CHART PAPER, ROLL 4-3/8" WIDE, 120 FEET LONG, WOUND ON 5/8" DIA. CARDBOARD TUBE 1/32" THICK, 50 TOTAL DIVISIONS, MARKED 0 TO + AND - 50 FROM EACH SIDE OF CENTER. CONVEX LINES 1/2" APART. SPROCKET HOLES 1/2" APART ON LEFT EDGE.		RE 13A 636	CG-10087 SG PERMANENT MAGNET: OVERALL FRAME SIZE 4-3/4" X 2-1/2" X 9-1/2" (EXCEPT FOR ONE FACE WHICH IS 3" X 9"). FRAME THICKNESS 1/4". POLE PIECES ARE COAXIAL WITH LONGEST CENTER-LINE OF FRAME. POLE FACES 1-5/8" DIA. ARE SEPARATED 1.5 ± 0.005". ONLY FACES 2/17/42 6973392 G3	12/8/41 JUNE 42	CG:K-8070046 REV 0	CGW 10095 RBM-1, RBM-2 MOBILE SPARE PARTS BOX: CARRIES MOBILE SPARE PARTS, INTER-CONNECTING CABLES, TOOLS, CANVAS COVER, INSTRUCTION BOOK, AND TWO PAIRS OF HEADPHONES.		
9/22/41 DEC. 41	CG:5505		CG-10087 SG PERMANENT MAGNET: OVERALL FRAME SIZE 4-3/4" X 2-1/2" X 9-1/2" (EXCEPT FOR ONE FACE WHICH IS 3" X 9"). FRAME THICKNESS 1/4". POLE PIECES ARE COAXIAL WITH LONGEST CENTER-LINE OF FRAME. POLE FACES 1-5/8" DIA. ARE SEPARATED 1.5 ± 0.005". ONLY FACES 2/17/42 6973392 G3	12/8/41 DEC. 41	M-421992	CGW 10095 RBM-1, RBM-2 MOBILE SPARE PARTS BOX: CARRIES MOBILE SPARE PARTS, INTER-CONNECTING CABLES, TOOLS, CANVAS COVER, INSTRUCTION BOOK, AND TWO PAIRS OF HEADPHONES.		
10078 ARB TEE TUNING CONNECTOR UNIT			CG-10087 SG PERMANENT MAGNET: OVERALL FRAME SIZE 4-3/4" X 2-1/2" X 9-1/2" (EXCEPT FOR ONE FACE WHICH IS 3" X 9"). FRAME THICKNESS 1/4". POLE PIECES ARE COAXIAL WITH LONGEST CENTER-LINE OF FRAME. POLE FACES 1-5/8" DIA. ARE SEPARATED 1.5 ± 0.005". ONLY FACES 2/17/42 6973392 G3	12/8/41 DEC. 41	M-421992	CGW 10095 RBM-1, RBM-2 MOBILE SPARE PARTS BOX: CARRIES MOBILE SPARE PARTS, INTER-CONNECTING CABLES, TOOLS, CANVAS COVER, INSTRUCTION BOOK, AND TWO PAIRS OF HEADPHONES.		
12/8/41 DEC. 41	P-721095-1		CG-10087 SG PERMANENT MAGNET: OVERALL FRAME SIZE 4-3/4" X 2-1/2" X 9-1/2" (EXCEPT FOR ONE FACE WHICH IS 3" X 9"). FRAME THICKNESS 1/4". POLE PIECES ARE COAXIAL WITH LONGEST CENTER-LINE OF FRAME. POLE FACES 1-5/8" DIA. ARE SEPARATED 1.5 ± 0.005". ONLY FACES 2/17/42 6973392 G3	12/8/41 DEC. 41	M-421992	CGW 10095 RBM-1, RBM-2 MOBILE SPARE PARTS BOX: CARRIES MOBILE SPARE PARTS, INTER-CONNECTING CABLES, TOOLS, CANVAS COVER, INSTRUCTION BOOK, AND TWO PAIRS OF HEADPHONES.		
10079 ARB FLEXIBLE TUNING SHAFT			CG-10087 SG PERMANENT MAGNET: OVERALL FRAME SIZE 4-3/4" X 2-1/2" X 9-1/2" (EXCEPT FOR ONE FACE WHICH IS 3" X 9"). FRAME THICKNESS 1/4". POLE PIECES ARE COAXIAL WITH LONGEST CENTER-LINE OF FRAME. POLE FACES 1-5/8" DIA. ARE SEPARATED 1.5 ± 0.005". ONLY FACES 2/17/42 6973392 G3	12/8/41 DEC. 41	M-421992	CGW 10095 RBM-1, RBM-2 MOBILE SPARE PARTS BOX: CARRIES MOBILE SPARE PARTS, INTER-CONNECTING CABLES, TOOLS, CANVAS COVER, INSTRUCTION BOOK, AND TWO PAIRS OF HEADPHONES.		
12/8/41 DEC. 41	P-721095-2		CG-10087 SG PERMANENT MAGNET: OVERALL FRAME SIZE 4-3/4" X 2-1/2" X 9-1/2" (EXCEPT FOR ONE FACE WHICH IS 3" X 9"). FRAME THICKNESS 1/4". POLE PIECES ARE COAXIAL WITH LONGEST CENTER-LINE OF FRAME. POLE FACES 1-5/8" DIA. ARE SEPARATED 1.5 ± 0.005". ONLY FACES 2/17/42 6973392 G3	12/8/41 DEC. 41	M-421992	CGW 10095 RBM-1, RBM-2 MOBILE SPARE PARTS BOX: CARRIES MOBILE SPARE PARTS, INTER-CONNECTING CABLES, TOOLS, CANVAS COVER, INSTRUCTION BOOK, AND TWO PAIRS OF HEADPHONES.		
10080 ARB RIGHT ANGLE TUNING DRIVE			CG-10087 SG PERMANENT MAGNET: OVERALL FRAME SIZE 4-3/4" X 2-1/2" X 9-1/2" (EXCEPT FOR ONE FACE WHICH IS 3" X 9"). FRAME THICKNESS 1/4". POLE PIECES ARE COAXIAL WITH LONGEST CENTER-LINE OF FRAME. POLE FACES 1-5/8" DIA. ARE SEPARATED 1.5 ± 0.005". ONLY FACES 2/17/42 6973392 G3	12/8/41 DEC. 41	M-421992	CGW 10095 RBM-1, RBM-2 MOBILE SPARE PARTS BOX: CARRIES MOBILE SPARE PARTS, INTER-CONNECTING CABLES, TOOLS, CANVAS COVER, INSTRUCTION BOOK, AND TWO PAIRS OF HEADPHONES.		
12/8/41 DEC. 41	P-721095-2		CG-10087 SG PERMANENT MAGNET: OVERALL FRAME SIZE 4-3/4" X 2-1/2" X 9-1/2" (EXCEPT FOR ONE FACE WHICH IS 3" X 9"). FRAME THICKNESS 1/4". POLE PIECES ARE COAXIAL WITH LONGEST CENTER-LINE OF FRAME. POLE FACES 1-5/8" DIA. ARE SEPARATED 1.5 ± 0.005". ONLY FACES 2/17/42 6973392 G3	12/8/41 DEC. 41	M-421992	CGW 10095 RBM-1, RBM-2 MOBILE SPARE PARTS BOX: CARRIES MOBILE SPARE PARTS, INTER-CONNECTING CABLES, TOOLS, CANVAS COVER, INSTRUCTION BOOK, AND TWO PAIRS OF HEADPHONES.		
10081 ARB RECEIVER MOUNTING BASE			CG-10087 SG PERMANENT MAGNET: OVERALL FRAME SIZE 4-3/4" X 2-1/2" X 9-1/2" (EXCEPT FOR ONE FACE WHICH IS 3" X 9"). FRAME THICKNESS 1/4". POLE PIECES ARE COAXIAL WITH LONGEST CENTER-LINE OF FRAME. POLE FACES 1-5/8" DIA. ARE SEPARATED 1.5 ± 0.005". ONLY FACES 2/17/42 6973392 G3	12/8/41 OCT. 42	CRV:MI-8690 REV 10	CGW 10095 RBM-1, RBM-2 MOBILE SPARE PARTS BOX: CARRIES MOBILE SPARE PARTS, INTER-CONNECTING CABLES, TOOLS, CANVAS COVER, INSTRUCTION BOOK, AND TWO PAIRS OF HEADPHONES.		
12/8/41 OCT. 42	CRV:MI-8690 REV 10	T-620347-501 REV 10	CGC 10088 ANA TRANSMITTER-RECEIVER MOUNTING BASE: FOR MOUNTING ONE TYPE CGC-43018 TRANSMITTER RECEIVER UNIT TO BULKHEAD OR SIMILAR SURFACE. INCLUDES AN 8-CONTACT PLUG, AN 8-CONTACT RECEPTACLE, SECURING CLASP, ANTENNA TRIMMER TO PERMIT USE OF EQUIPMENT ON LONG WIRE	12/8/41 APR. 42	FT-295-T2 63034902	CGW 10095 RBM-1, RBM-2 MOBILE SPARE PARTS BOX: CARRIES MOBILE SPARE PARTS, INTER-CONNECTING CABLES, TOOLS, CANVAS COVER, INSTRUCTION BOOK, AND TWO PAIRS OF HEADPHONES.		P-7708695 SUB 0

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	----------	------	----------------------------	-------------------------------	----------	------	----------------------------	-------------------------------

RESTRICTED

NAVSHIPS 900,109

3.10-6

Class 10—Miscellaneous

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
10096	REPLACEMENT RE 10F 301		CWQ 10104	XJM-2		CGR 10112	JO	
KILOVOLT MOUNTING ASSEMBLY: FOR MOUNTING STYLE MFA KILO-VOLTMETER MULTIPLIER.			BATTERY BUOY RAFT:			STREAMLINE HOUSING: PROVIDES A SUITABLE HOUSING FOR TYPE CBD-51035 HYDROPHONE ASSEMBLY.		
4/18/42	JUNE 42		5/17/42	AUG. 42		7/3/42		CBD:13774
10097	REPLACEMENT RE 10F 301		CWQ 10105	RBF-2		CGM 10113	YB-2	
KILOVOLT MOUNTING ASSEMBLY: FOR MOUNTING STYLE MFB KILO-VOLTMETER MULTIPLIER.			RADIO TUNER UNIT: CONSISTS OF A MOTOR DRIVEN SHAFT WHICH IS COUPLED BY A UNIVERSAL JOINT TO THE TUNING CAPACITOR SHAFT OF THE TYPE CWQ-46171 RADIO RECEIVER UNIT. PROVIDES AUTOMATIC SCANNING AND LISTENING TO UP TO TEN PRESELECTED FREQUENCIES.			TOWING AND SERVICE TRUCK: 1-1/2 TON TRUCK WITH DUAL BACK WHEELS, 134-1/2" WHEEL BASE, ALL STEEL BODY, LONG RUNNING BOARDS, SAFETY GLASS ALL AROUND. USES 6 PLY 6.50 X 20 TIRES. CGM: MODEL CC-302 CHASSIS, BODY MODEL 1590 7/9/42 SEE ABOVE		
4/18/42	JUNE 42		5/17/42	AUG. 42				
CCR 10098	66045		CIB 10106	PO	CCS: 14.02			CGM 10113
ADAPTER FOR BASE INSULATORS			TRANSCRIBER-REPRODUCER 14.10			INCLUDES TWO MIRRORS, TWO WINDSHIELD WIPERS. GROSS WEIGHT 4760 POUNDS. ("S" TYPE WITH MIFFLINBURG MODEL 409 PANEL BODY SUPPLIED (26 UNITS), WEIGHT 4860 POUNDS).		
4/21/42	A20		5/22/42	JULY 43				
CRV 10099	QCP		CYN 10107	TBC-4		CRP 10114	SG	
WATER STATION UNIT: TRIPOD TYPE; BASE 24 FOOT DIAMETER CIRCLE, 12 FEET HIGH. INCLUDES A CYLINDRICAL WATERTIGHT CASING CONTAINING THE PROJECTOR AND TRAINING MECHANISM.			COOLING UNIT: CONSISTS OF MOTOR AND PUMP. MOTOR RATED 1 HP, 220/440 VOLTS 3 PHASE 50 OR 60 CYCLES.			DEFLECTION COIL ASSEMBLY: CONSISTS OF TWO COILS IN SERIES AIDING. TOTAL OF 1980 TURNS OF #33 EN WIRE; TEST VOLTAGE 3000 VOLTS PK., .178 HENRIES; 25% DC RESISTANCE 116 OHMS ±10%. MAXIMUM DIMENSIONS, 2.291" THICK X 4.903" IN DIAMETER.		
4/23/42	MI-16700	M-303394	5/28/42	SIZE 605	CG:P-7765239	7/9/42	WX-3893	DU674-5047
AUG. 42		SUB O.	JULY 43	DESIGN 5	REV 1	AUG. 43		SUB 1
CMN 10100	YD-2		CRU 10108	NK-2		CRP 10115	SG	
TWO WHEEL TRAILER: TWO WHEEL TRAILER CHASSIS, SPRING MOUNTED. EQUIPPED WITH ELECTRIC BRAKES AND 600 X 16-6 PLY. TIRES.			STRAIGHT LINE RECORDING CHART: 75" LONG HAS 3 SCALES 0-60, 60-120, 120-180. RECORDS IN FEET OR FATHOMS. RATE OF TRAVEL IS 2" PER MINUTE.			FOCUSING COIL ASSEMBLY:		
5/14/42	OCT. 42		6/8/42	AUG. 42	CIP:ES-14	7/9/42		DU 74-719
CRI 10101	TBY-2		6/8/42	AUG. 42		AUG. 43		SUB 5
SPARE PARTS BOX:			CN- 10109 GENERAL USE HANDLE: 18" LONG X 5/8" O.D. PHENOLIC. THREADED AT ONE END TO HOLD 1/4 WATT NEON BULB USED FOR R.F. INDICATING PURPOSES.			* TELEGRAPH KEYING		
5/4/42	JUNE 42		6/23/42	AUG. 42		7/9/42	CPM:	NOV. 42
CWQ 10102	JM-2		10110	LH-13, 17	AN91309	CFD 10117	* SEE BELOW	
TRANSMITTER BUOY:			CANVAS BAG: 5/22/42 WATER PROOF, FOR HOUSING NAVY PIPE CRR-10111 CARRYING BOX. INCLUDES A STRAP.			AIR COMPRESSOR UNIT: POWER INPUT: 115/1/60. SINGLE CYLINDER, SINGLE STROKE, 2" BORE, 1-3/4" STROKE, 400 RPM, 7-1/2" PULLEY, DELIVERS 3/4 CUFT/MIN. INCLUDES: MOTOR RATED 1/4 HP, 115/1/60, 2.35 AMPS (47 AMPS STARTING * L424/146-43/SHIPS 7/9/42 CFO:A-120 AUG. 42 SPECIAL		
5/17/42	AUG. 42		6/24/42	CWQ:	CKB:15-A0030-4			
			SEPT 43	CWJ:	REV 0			
CWQ 10103	JM-2		CRR 10111	LH-13				CFO 10117
TRANSMITTER BUOY TAIL PIPE:			CARRYING BOX: FOR HOUSING ONE NAVY TYPE CRR-74028 HETERODYNE FREQUENCY METER TWO TYPE -19020 6 VOLT BATTERIES, 4 TYPE -13021 45 VOLT BATTERIES, ONE SPARE -400238 CRYSTAL & HOLDER AND ONE SET OF SPARE VACUUM TUBES.			CURRENT) 40° C CONT., 1750 RPM, SLEEVE TYPE BEARINGS, 1-3/4 PULLEY, 5 GALLON TANK WITH PRESSURE SWITCH TO CUT OUT AT 20 POUNDS PER SQUARE INCH AND CUT-IN AT 40 POUNDS PER SQUARE INCH, TANK PRESSURE GAGE 0-150 POUNDS PER SQUARE INCH, LINE PRESSURE GAGE 0-80 POUNDS PER SQUARE INCH.		
5/17/42	AUG. 42		6/24/42		R95988			
			MAR. 43					

Class 10—Miscellaneous

3.10-7

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CF0 10118	*SEE BELOW		CF0 10118			CW- 10131	PF	
DEHYDRATING UNIT: CONSISTS OF 2 SILICA-GEL TANKS IN PARALLEL SUCH THAT ONLY ONE TANK IS USED AT ANYONE TIME. ELECTRIC HEATER SUPPLY IS 115/1/60. TEMPERATURE IS THERMOSTATICALLY CONTROLLED BY PENN. MAGNETIC SWITCH			SET TO CUT-IN AT 185° C AND CUT-OUT AT 190° C. EACH TANK HAS MANUAL ON-OFF SWITCH AND IS DESIGNED TO PASS 1-1/2 CU FT PER MIN. AND REDUCE THE HUMIDITY TO LESS THAN 20% FOR A PERIOD OF 8 HOURS.			ANTENNA PLATE ASSEMBLY: FOR MOUNTING NAVY TYPE CW-23 ACT REMOTE CONTROL UNIT AND CLAMPING 14 CONDUCTOR CABLE.		
*EN281146-43/SHIPS 7/9/42 MAR. 44		S-145 10E				Ø CW:ES-690777-1. 2 ISSUE B; ES-690781-2 ISSUE A; ES-690781-4 ISSUE B; ES-690781-1 ISSUE A 9/5/42 OCT. 42		Ø SEE ABOVE
						10132	SD-3	
						ANTENNA PEDESTAL: CONSISTS OF A CAST HOUSING CONTAINING AN 18 TO 1 WORM REDUCTION GEAR WHICH COUPLES THE MECHANICAL DRIVE LINKAGES FROM THE TYPE -55 ACM TRAIN INDICATOR TO TYPE -66 ADB ANTENNA ASSEMBLY.		
						9/4/42	CRY:41-14009	CRY:4-440002-1
						JULY 42	CNM:	SUB 3
CG- 10119	SG		CG- 10125-A	RAO-3, RAO-4		CGN 10133	MU, MV, MW, MX	
SOLENOID: 115 VOLTS AC 60 CYCLES.			MOUNTING BASE: FOR CWQ-46187-A AND CWQ-46187-B RECEIVER. ELECTRICALLY AND MECHANICALLY INTERCHANGEABLE WITH CNA-10125.			CASE: RUBBER CASE TO HOUSE NAVY TYPE CBR-19027 BATTERY PACK AND EITHER NAVY TYPE CCI-43029, CCI-43030, CCI-43031 OR CCI-43032 RADIO TRANSMITTER-RECEIVER.		
7/10/42	CG:CR9503-20SD	CG:GEM-856	4/14/43			9/10/42		CCI:145-3.1E
MAR. 43			JULY 43			OCT. 42		REV 0
CRR 10120	LH-11		CTV 10126	CXBU		CGN 10134	MU, MV, MW, MX	
MOUNTING BASE FOR RECTIFIER POWER UNIT: PROVIDES MOUNTINGS FOR NAVY TYPE CRR-20104 RECTIFIER POWER UNIT.			MOUNTING BASE:			COVER: RUBBER COVER FOR NAVY TYPE CGN-10133 CASE.		
7/13/42			7/27/42			9/10/42		CCI:145-3.13
AUG. 42			AUG. 42			OCT. 42		REV 0
CRR 10121	*SEE BELOW		CCI 10127	CXBU-1		CLZ 10135	MU, MV, MW, MX	
MOUNTING BASE FOR MET- ERODYNE FREQUENCY METER: PROVIDES MOUNTINGS FOR NAVY TYPE CRR-74028. METERODYNE FREQUENCY METER.			MOUNTING BASE:			ANTENNA LOAD COIL SLEEVE: RUBBER SLEEVE TO PROTECT ANTENNA LOADING COIL. USED ON NAVY TYPES -66068 TO -66077 ANTENNA ASSEMBLIES.		
* LH-10, LH-11, LH-12 7/13/42 OCT. 42			7/27/42			9/14/42	CLZ:7854	CCI:57-7845
			AUG. 42			OCT. 42		REV 0
CMV 10122	PE		CJF 10128	TDM		10136	OS	
CABINET: SHEET STEEL CABINET WHICH INCLUDES INPUT POWER TERMINAL BOARD. INCLUDES RECORD STORAGE COMPARTMENT. HOUSES THE MAJOR UNITS OF MODEL PE.			HOUSE AND SHELTER: DIMENSIONS OF HOUSE ARE APPROXIMATELY 7 FT BY 7 FT BY 7 FT. INSTRUMENT SHELTER IS MOUNTED ON TOP OF HOUSE. OVERALL HEIGHT OF HOUSE AND SHELTER IS APPROX 16 FT. HOUSE READILY ASSEMBLED AND DISASSEMBLED.			RECORDER INK: BLACK - PINT BOTTLES.		
7/15/42	CMV:2538R2	CMV:253E	8/8/42	SHELTER		7/15/42	CG:30, RECORDER	
JULY 43			OCT. 42	TYPE #990		OCT. 42	INK	
CIA 10123	RBF-1		CMY 10129	TDM		CPO 10137	SD-3	
MOUNTING RACK: FOR MOUNTING 10 RADIO RECEIVER UNITS, AUDIO AMPLIFIER & LV RECTIFIER, SWITCHING & HV RECTIFIER.			GASOLINE TANK: CYLINDRICAL STEEL GALVANIZED TANK FOR USE WITH TYPE 75012 GASOLINE ENGINE GENERATOR SET. CAPACITY 80 GALLONS.			DEHYDRATING UNIT: CONSISTS OF A CORNELIUS 1800 CU IN/MIN ROTARY COMPRESSOR AND SILICA GEL DEHYDRATOR. INITIAL DEW POINT LESS THAN -60°F AFTER 3 HOURS OPERATION. DEW POINT NOT LESS THAN -12°F. AUTOMATIC OPERATION. INPUT 115/1/60, 4-5 AMPS. 414 WATTS.		
7/20/42		CIA:05495-1A	8/10/42	KOVEN	ST-1157	9/15/42	CPO: 2200	CRY:P-721460
JULY 43		ISSUE 10	MAR. 43			JULY 43	CRY:41-14006A	SUB 1
CNA 10124	RBL-1.-2		10130	DAR		CFE 10138	RBR	
MOUNTING BASE:			LOOP ADAPTER: BASE FOR MOUNTING LOOP ASSEMBLY. NAVY TYPE RA-69082.			CASE: METAL CASE USED FOR RECEIVER OR BATTERY. MADE OF 0.010" STEEL.		
7/27/42		CNA:D-911	(RA) 8/17/42 OCT. 42			9/16/42		CFE:94-6.110
OCT. 42						OCT. 42		REV 0

RESTRICTED

NAVSHIPS 900,109

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CVA 10139	NXS-9827		CW 10147	AMB		CBM 10152		
MICROPHONE HOLDER; STEEL HOLDER FOR USE WITH -51004 SERIES MICROPHONE.			MOUNTING PLATE FOR JUNCTION BOX; FOR MOUNTING NAVY TYPE CW-62070 JUNCTION BOX.			BY CONTROL OF A VARIABLE CLUTCH. INPUT 10 AMPS. 560 WATTS.		
9/17/42	9035	CVA:9035	10/17/42					
JULY 43		1/14/43	APR. 43					
CW 10140	PF		CGG 10148	OAG		CGO 10153	DAP	
MOUNTING BASE; SHOCK MOUNT FRAME FOR NAVY TYPE -69AAA AUDIO SIGNAL SCRAMBLER. FOR SHOCK ABSORBER MOUNTING.			TEST CASE: SIMILAR TO THE CASE FOR NAVY TYPE CGG-43014 RADIO TRANSMITTER-RECEIVER EXCEPT HAS HOLES TO PERMIT ADJUSTMENT OF TRIMMERS WHEN EQUIPMENT IS BEING TESTED. SAME AS PART OF NAVY TYPE CGG-60030.			MOUNTING BASE; FOR TYPE -46177 RECEIVER. INCLUDES FOUR LORD TYPE SHOCK ABSORBERS AND FOUR BOLTS AND THUMB SCREWS FOR MOUNTING RECEIVER.		
			10/22/42			11/21/42		
			APR. 43			APR. 43		
QES0-690765	ISSUE 2							
Q CW: 690766-1	ISSUE C(3)							
9/26/42		QSEE ABOVE						
APR. 43								
COP 10141	RBY		CBM 10149	MCA-1		CRY 10154	QCQ-2	
CABINET; FOR HOUSING NAVY TYPE CHL-46195 RADIO RECEIVER AND NAVY TYPE CPN-55095 PANORAMIC ADAPTER. OVER ALL DIMENSIONS 19-1/2" HIGH, 21" WIDE, 15" DEEP.			TRAINING UNIT: IDENTICAL TO -10060 TRAINING UNIT EXCEPT EMPLOYS A 90 TO 160 VOLT AC TRAINING MOTOR IN PLACE OF THE 175 TO 335 VOLT DC MOTOR.			TRAINING UNIT: CONSISTS OF A MOTOR DRIVEN MECHANISM, SHAFT AND LOWER BEARING ASSEMBLY. MOTOR DRIVEN MECHANISM COMPRISES THE MOTOR AND POTENTIOMETER THE SAME AS IS USED ON TYPE CRY-78152 MOIST-TRAIN MECHANISM. INPUT 115/1/60, 30 WATTS, .3 AMP MAX. 11/24/42 MI-8993-A CRY:W-3060008-8 MAR. 43 SUB 3		
10/1/42			11/5/42	776G	60046 ALT 1			
APR. 43			APR. 43					
CPJ 10142	TBY-2		CBM 10149-A	WEB		10155	*SEE BELOW	
SHIPPING CHEST: CONSTRUCTION QF3/8" PLYWOOD WITH THIN LAYER OF FIBER ATTACHED. OVERALL DIMENSIONS 21-5/8" LONG, 17-23/32" DEEP, AND 11-7/8" HIGH. OLIVE GREEN FINISH. SIMILAR TO -10197 CAT: 1-7609476 SUB 0; 1-7609486 SUB 0			TRAINING UNIT SAME AS BASIC NUMBER EXCEPT TRAINING MOTOR HAS MALLEABLE IRON END BELLS INSTEAD OF CAST IRON, AND STEEL FRAME. COMPENSATING CHANGES HAVE BEEN MADE IN THE WINDINGS BECAUSE OF THE DIFFERENCE IN THE MAGNETIC CHARACTERISTICS OF THE 1/4/44 776K 6991 ALT 5			MODULATOR & RECTIFIER HOUSING: MADE OF #16 GAUGE HOT-ROLLED STEEL; DIVIDED TO CONTAIN THREE COMPARTMENTS. ONE END COMPARTMENT HOUSES THE MODULATOR, CENTER COMPARTMENT HOUSES A BLOWER FOR AIR CIRCULATION, AND OTHER COMPARTMENT HOUSES THE RECTIFIER POWER 11/27/42 CRY:MI-18072 CRY:P-721469-1 APR. 43 CG:4Y55A1 SUB 0 QSEE PL 2		
10/5/42		QSEE ABOVE						
APR. 43								
CIA 10143	USE WITH JM-1							
TEST ADAPTER: METERING BOX FOR MEASURING FILAMENT AND PLATE VOLTAGE AND CURRENT. TERMINALS MARKED FOR 7.5 AND 300 VOLTS AND 75 MA AND 1.5 AMPS. FOUR SETS OF TERMINALS.			MATERIAL ALSO HAS NEW TRAINING LIMIT SWITCH WHICH PERMITS OVER TRAVEL WITHOUT DAMAGE TO THE TRAINING SWITCH.			UNIT. INCLUDES SHOCK MOUNTS, AND GASKETED COMPARTMENT COVER PLATES TO RENDER INTERIOR MOISTURE-PROOF.		
10/12/42		05565.1						
MAR. 43								
CHX 10144	GENERAL USE		CBM 10150	MCA-1		CVB 10156	NXSS-12203/JR	
MICROPHONE HOLDER: PRESSED METAL HOLDER FOR USE WITH NAVY TYPE -51004 SERIES MICROPHONES.			TRAINING UNIT: IDENTICAL TO TYPE CBM-10035A TRAINING UNIT EXCEPT EMPLOYS A 90 TO 160 VOLT DC TRAINING MOTOR IN PLACE OF THE 175 TO 335 VOLT DC MOTOR.			HYDROPHONE TRIPOD: SIMILAR TO CBD-10159 EXCEPT IS LARGER. PARTS NOT INTERCHANGEABLE.		
QNAF:213264-2	ALT 8; CHX:8630758	REV 3	11/5/42	776F	6991	12/5/42		
10/15/42		QSEE ABOVE	NOV. 43		ALT 4	APR. 43		NDRC:6106
MAR. 43								
CID 10145	AMB		CBM 10151	OAM		COO 10157	EAM	
MOUNTING BASE FOR TRANSMITTER-RECEIVER; SHOCK MOUNTING FOR NAVY TYPE CW-43036 AIRCRAFT RADIO TRANSMITTER RECEIVER.			SLIDE VIEWER AND HOLDER: USED AS A MEANS OF COMPARING THE RECORDED TEMPERATURE DEPTH RECORD WITH AN ESPECIALLY CALIBRATED TEMPERATURE DEPTH RECORD SLIDE.			GUARD AND MOUNTING FRAME; MOUNTS AND PROTECTS NAVY TYPE COO-75021 GASOLINE ENGINE GENERATOR SET.		
10/17/42			11/19/42	846B	SK-5486	12/7/42		
APR. 43			APR. 43		ALT 0	NOV. 43		OTC-17608 REV 7-30-43
CW 10146	AMB		CBM 10152	OAM		CPR 10158	OAK	
MOUNTING PLATE FOR PILOT'S CONTROL UNIT: FOR MOUNTING NAVY TYPE CW-23554 PILOT'S CONTROL UNIT.			AC MOTOR DRIVEN WINCH: SUPPLIED WITH 1200 FEET OF 3/32 X 7 STAINLESS STEEL CABLE. CABLE MAY BE PAID OUT UNDER FREE WHEELING OR BRAKING ACTION. INCLUDES A 3/4 HP 115/1/60 MOTOR EMPLOYED TO HAUL IN THE CABLE AT SPEEDS UP TO A MAXIMUM OF 400 FEET PER MINUTE 11/19/42 913 SK-5487 ALT 0			CARRYING CASE:		
10/17/42			11/19/42	913	SK-5487	12/9/42		
APR. 43			APR. 43		ALT 0	APR. 43		

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

Class 10—Miscellaneous

3.10-9

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CBD 10159	JR MXSS-18317 RE 13A 680A		CRV 10166	ATJ, ATK		CRV 10173	ARJ, ARK	
HYDROPHONE TRIPOD: SIMILAR TO CV8-10156 EXCEPT SMALLER, BLOCKS HAVE HANDLES, USES DIFFERENT TYPE EYE BOLT. PARTS NOT INTERCHANGEABLE.			DYNAMOTOR MOUNTING BASE:			RECEIVER LIGHT SHIELD:		
12/10/42 APR. 43		CB.D:26000 REV 0	1/2/43 AUG. 44		T-256164 SUB 2	1/16/43 AUG. 44		T-256163 SUB 5
CRW 10159-A	JR		CRV 10167	ATJ, ATK		CRV 10174	ATJ, ATK	
HYDROPHONE TRIPOD: SAME AS CBD-10159 EXCEPT SLIGHT DIFFERENCES IN COMPONENT PARTS.			MOUNTING BASE FOR AIRCRAFT RADIO TRANSMITTER: INCLUDES SHOCK MOUNTS			MOUNTING PLATE FOR JUNCTION BOX: CONVERSION UNIT AND TRANSMITTER.		
9/11/43 NOV. 43		CRW:20306-C	1/2/43 AUG. 44		T-256166 SUB 3	1/16/43 AUG. 44		T-256179 SUB 1
CQP 10160	CXCT		CRV 10168	ATJ, ATK		CRV 10175	CRY-60ABX	
CABINET: HOUSES NAVY TYPE CPM-20A2M POWER RECTI- FIER UNIT, CPM-46ACB RF TO IF CONVERTER AND CPM-55ACS INDICATOR -IF TO VIDEO CONVERTER.			MOUNTING BASE FOR CONVER- SION UNIT: PROVIDES SHOCK MOUNTING.			MONITOR LIGHT SHIELD:		
12/12/42	CPN:503	CPN:P4-C-A101	1/2/43 AUG. 44		T-256168 SUB 4	1/21/43 AUG. 44		T-256167 SUB 3
APR. 43		7-27-42	CRV 10169	*SEE BELOW		10176	RE13A628C	RE 13A 628
RACK FOR MOUNTING AND HOUSING NAVY TYPES RW-20187 RECTIFIER POWER UNIT, RW-23340 SWITCHING UNIT AND CDI-50123 AUDIO AMP- LIFIER.			MOUNTING BASE FOR MONITOR: PROVIDES SHOCK MOUNTING.			SINGLE COPY GUMMED TAPE: GUMMED PAPER TAPE 3/8" WIDE, 8" DIAMETER ROLL, WOOD CORE, 2" DIAMETER. SAME AS -10055 EXCEPT FOR CORE DIAMETER.		
12/15/42 APR. 43			ATJ, ARJ, ATK, ARK.*		T-256167 SUB 3	1/23/43 APR. 43		
CZP 10162	MAB		COQ 10170	OAH		CWQ 10177	RBF-3	
CASE: PLASTIC CASE (PLASTIMOLD RESINOX #6905) FOR HOUSING TRANSMITTER-RECEIVER UNITS OF MODEL MAB			CARRYING CASE: CONTAINS COMPARTMENT FOR DRY BATTERIES AND ONE FOR ACCESSORIES. CASE HAS COVER AND 2 CARRYING HANDLES.			RADIO TUNER UNIT: SIMILAR TO TYPE -10105 EXCEPT FOR BOTH ELECTRICAL AND MECHANICAL CHANGES RECOM- MENDED BY NRL.		
1/1/43 APR. 43		CCI:145-3.1F REV 0	*MARINE CORPS:304811			1/26/43 APR. 43		
CZP 10163	MAB		1/5/43	NA1-509				
COVER: PLASTIC COVER (PLASTIMOLD RESINOX #6905) FOR NAVY TYPE CZP-10152.			1/5/43					
1/1/43 APR. 43		CCI:145-3.13F REV 0	1/7/43 APR. 43		CG:P-7765116 REV 0	1/30/43 APR. 43		CGF:A-320
CRV 10164	ARJ		CWH 10171	TCC-2		CWV 10178	QBC	
MOUNTING BASE FOR AIRCRAFT RADIO RECEIVER:			TANK AND CIRCULATING UNIT: CONSISTS OF 100 GALLON TANK, 2 MOTOR PUMPS AND G.E. MOTORS OF 3 HP, 220/440 V, 3 PHASE, 50/60 CY. 3000/3600 RPM, 2 STRAINERS, 2 STARTERS, SWITCH AND FRAME.			USED TO HOUSE CFF-43043 DRIVER-RECEIVER.		
1/2/43 AUG. 44		T-256163 SUB 5	1/26/43	CG:776568101	CG:P-7765698 REV 0	1/30/43 JULY 43		
CRV 10165	ATJ, ATK		1/7/43			CG 10179	MARK 11	
DYNAMOTOR MOUNTING PLATE:			1/26/43	CG:776568101	CG:P-7765698 REV 0	PERMANENT MAGNET: MAGNETIZED TO AN INTENSITY OF 1500 150 GAUSS AT CENTER OF 1.52" CAP USING #600 COIL.		
1/2/43 AUG. 44		T-256164 SUB 2	1/15/43 APR. 43	CEX:J-X-41	CEX:J-X-41	Ø CG:M-7468480 REV 1; CRY:M-422706 SUB 6 SEE ABOVE		
			ASSIGNED ISSUED			2/5/43 APR. 43		
DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER

RESTRICTED

NAVSHIPS 900,109

3.10-10

Class 10—Miscellaneous

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION		
CWT 10181 QBD WATER STATION UNIT: DOES NOT INCLUDE ROCHELLE SALT PROJECTOR			CRP 10186 SO ANTENNA ASSEMBLY TRIPOD:			CW 10194 ACCES.FOR SE ANTENNA DRIVE UNIT: FOR OPERATION FROM 32 VOLTS DC. ATTACHES TO -23ABY CONTROL UNIT.				
2/5/43 APR. 43			2/8/43 APR. 43		M-3A-U260 SUB A	2/27/43 NOV. 43		D-150958 LESS D-150531 ESXX-697627 ISSUE 1		
CVD 10182 MZ RECONNAISSANCE CAR: INCLUDES 1/4 TON 4X4 JEEP WITH OPERATING SPARES, AND WATER-PROOF CASES. HAS MODEL TCS TRANSMITTER AND RECEIVER AND POWER UNIT. ALSO INCLUDES TYPE 211000 GENERATOR. POWER TAKE-OFF ALTERED TO MAKE AVAILABLE A DRIVE FOR THIS GENERATOR.			CRP 10187 SO ANTENNA ASSEMBLY CRADLE:			CW 10195 ACCES.FOR SE ANTENNA DRIVE UNIT: FOR OPERATION FROM 115 VOLTS DC. ATTACHES TO -23ABY CONTROL UNIT.				
2/6/43 APR. 43			2/8/43 APR. 43		3A15-V176 SUB A	2/27/43 NOV. 43		D-150959 LESS D-150531 ESXX-697627 ISSUE 1		
CVD 10182-A MAA RECONNAISSANCE CAR: SAME AS BASIC NUMBER EXCEPT FOR SLIGHTLY DIFFERENT SIZE OF WATERPROOF CASE.			CRP 10188 SO MOUNTING BASE FOR MOTOR-ALTERNATOR AND MODULATOR:			CW 10196 MARK 19 RECTIFIER POWER UNIT HOUSING: USED TO HOUSE THE RECTIFIER POWER UNIT AT ONE END, THE RECTIFIER POWER UNIT FILTER AT THE OTHER END, AND A BLOWER, ETC IN THE CENTER COMPARTMENT. INCLUDES SHOCK MOUNTS AND CASKEXED COVER PLATES TO RENDER INTERIOR MOISTURE-PROOF				
4/2/43 JULY 43			2/8/43 APR. 43			3/5/43 JULY 43		D-151342 BR-11378 ISSUE 2		
CY:10182-B MZ-2 RECONNAISSANCE CAR SAME AS -10182 EXCEPT ANTENNA BASE HAS BEEN REDESIGNED, THE TCS POWER SUPPLY HAS BEEN RELOCATED AND THE BATTERIES HAVE BEEN RELOCATED.			CW 10189 MARK 16 TEST ANTENNA MOUNTING BASE:			10196 MECHANICALLY INTERCHANGEABLE WITH -10155				
2/26/44 MAR. 44			2/11/43 APR. 43		ES-696000					
CVD- 10182-C MZ-3 RECONNAISSANCE CAR CONSISTS OF 1/4 TON 4X4 TRUCK, A TYPE -211000-ADC GENERATOR & 2 BATTERY BOXES. SIMILAR TO -10182-B EXCEPT DC GENERATOR AND ENGINE HAVE BEEN RADIO SHIELDED AND MADE SUBMERGENCE PROOF AND CARRTING CASES FOR ISC EQUIPMENT ARE NOT INCLUDED.	RE13A917B		10190 MARK 16 ANTENNA TOWER:			10197 TBY-4 SHIPPING CHEST: CONSTRUCTION OF 3/8" PLYWOOD WITH THIN LAYER OF FIBRE ATTACHED. SIMILAR TO TYPE -10142 EXCEPT IS LONGER.				
1/26/45 MAR. 45			2/11/43 APR. 43		CW:KS-5977 LIST 1 CXX	3/15/43 AUG. 43		CRI:E-52011 REV 1		
10183 MZ CANVAS COVER: USED FOR CARRYING SPARE TYPE -66085 ANTENNA SECTIONS SAME AS TYPE -10298 ARMY TYPE BC-56-A.			CW 10191 MARK 16 OPERATING TRAILER: INCLUDES VENTILATION, HEATING EQUIPMENT, BUT NO MAJOR UNITS OF MARK 16 EQUIPMENT.			CPR 10198 ASG. OAK MANUAL DEHYDRATING PUMP: INCLUDES A HAND OPERATED PISTON TYPE PUMP; A DRYING CYLINDER CONTAINING 0.7 POUND OF "SILICA-GEL"; A PRESSURE GAUGE WITH SCALE OF 0 TO 30 PUMPS PER SQ. IN.				
2/6/43 MAR. 44		SC-D-1404, 1405, 1406 REV H	2/11/43 APR. 43		ES-803700	3/22/43 SEPT. 43		CPR:348-1088A		
10184 MZ CANVAS COVER: USED FOR PROTECTING TYPE -61450 BASE INSULATOR WHEN NOT IN USE. ARMY TYPE BC-57A			CW 10192 MARK 16 POWER TRAILER: DOES NOT INCLUDE GASOLINE ENGINE-GENERATOR SETS.			CPR 10198-A ASG. OAK* MANUAL DEHYDRATING PUMP: INCLUDES A HAND OPERATED PISTON TYPE PUMP; A DRYING CYLINDER CONTAINING 0.7 POUND OF "SILICA-GEL"; A PRESSURE GAUGE WITH SCALE 0 TO 30 POUNDS PER SQ. IN. SAME AS CPR-10198 EXCEPT HAS WINDOW IN SILICA-GEL CYLINDER. *NXXB-27450				
2/6/43 MAR. 44		SC-D-9071 REV B	2/11/43 APR. 43		ES-803701	6/18/43 NOV. 43		CPR:4LO-59 REV O		
CMD 10185 *SEE BELOW VENTILATING PANEL: INCLUDES FAN, PROVIDES VENTILATION FOR CABINETS ON BL EQUIPMENTS.			10193 TBY-5 SHIPPING CHEST: CONSTRUCTION OF 3/8" PLYWOOD WITH THIN LAYER OF FIBER ATTACHED. SAME AS TYPE -10142 INTERNALLY. HOWEVER FIBER IS IMPREGNATED SO AS TO MAKE CHEST FUNGI RESISTANT.			CPR-10198-B ASG. OAK * MANUAL DEHYDRATING PUMP: INCLUDES A HAND OPERATED PISTON TYPE PUMP; A DRYING CYLINDER CONTAINING 0.7 POUND OF "SILICA-GEL"; A PRESSURE GAUGE WITH SCALE OF 0 TO 30 POUNDS PER SQ. IN. SAME AS CPR-10198-A EXCEPT FOR REARRANGING COMPONENTS TO MAKE THE UNIT MORE				
2/6/43 JULY 43		CHZ:MA-1032 ISSUE A	2/17/43 APR. 43			10/20/43 NOV. 43		348-1560 CPR:348-1560 SUB G		
DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER

Class 10—Miscellaneous

3.10-11

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CPR-10198-B COMPACT AND RUGGED. INTERCHANGEABLE WITH -10198 OR -10198-A. SAME AS AN TYPE PRESSURIZING KIT MK-12/AP			CBY 10206 ATA-3 REMOTE CONTROL UNIT MOUNTING: USED FOR MOUNTING NAVY TYPES CBY-23243 OR CBY-23369 TRANSMITTER CONTROL UNITS.			CRR 10214 LM-19 WATERPROOF CARRYING CASE: FOR HOUSING TYPE CRR-74028 FREQUENCY METER. SIMILAR TO CRR-10086 EXCEPT IS MADE OF STEEL INSTEAD OF ALUMINUM AND HAS SLIGHTLY DIFFERENT DIMENSIONS.		
CIA 10199 JM-1 BREATHER VALVE ASSEMBLY: CONSISTS OF SYNTHANE TUBULAR HOUSING WITH HEXAGONAL BRASS BODY, CONTAINING A RUBBER TUBE.			4/29/43 CBY:#7083 SEPT 43			6/3/43 SEPT 43		CRR:R96140 ISSUE 0
3/26/43 SEPT 43		CIA:D5585.1 3/18/43	5/12/43 MX-4875 NOV. 43		CRP:H-3A-U459 SUB A			*FIRST PURCHASE: NX99-28012 6/3/43 SEPT 43
CBM 10200 QCP-1 WATER STATION UNIT: TRIPOD TYPE; BASE 24 FEET DIAMETER CIRCLE. 11 FEET 8 INCHES HIGH. INCLUDES A CYLINDRICAL WATERTIGHT CASING FOR HOUSING THE PROJECTOR AND THE TRAINING MECHANISM.			CFT 10208 YL BASE: USED TO PROVIDE A ROTATABLE MOUNTING FOR TYPE CFT-10209 CABINET. PROVIDED WITH A POINIER. CIRCUMFERENCE IS MARKED IN DEGREES.			CAFN 10216 OAS HOUSING: CYLINDRICAL AND WATERTIGHT, TO BE TOWED BY A CABLE; HAS HORIZONTAL AND VERTICAL FINS TO PROVIDE HORIZONTAL AND VERTICAL TRIM WHEN TOWED. VERTICAL FINS USED TO MOUNT THE PROJECTORS. INSIDE HOUSING IS MOUNTED AN AMPLIFIER. POWER FOR WHICH		
3/27/43 CBM:S97 SEPT 43		CBM:SK-5496 ALT 0	5/14/43 RA-1913-14 SEPT 43		RA-1913-14A	NOV.. 43		CAFN 10216 OAS IS SUPPLIED THROUGH THE TOWING CABLE.
CM-10201 *(AN/FGC-1A) ALARM PANEL: CONSISTS OF ALARM BUZZERS AND ASSOCIATED RELAY, WHICH ARE REQUIRED FOR GIVING AN AUDIBLE SIGNAL WHEN A FUSE BLOWS.			CFT 10209 YL CABINET: USED TO HOUSE OR SUPPORT YL EQUIPMENT. MOUNTS ON TYPE CFT-10208 BASE, ROTATION IS CONTROLLED BY A HANDWHEEL ON SIDE OF CABINET.					CAFN 10216
*FIRST PURCHASE: NX99-20953 4/1/43 CM:X-61790A-1 AUG. 44 FIG G			5/14/43 RA-1903-14 SEPT 43		RA-1903-14A			
CM-10202 *(AN/FGC-1A) OUTLET AND HEATER BOX: THE AC POWER SUPPLY OF NAVY TYPE CM-23000 IS TERMINATED IN THIS BOX, WHICH HOUSES THE OUTLETS FOR THE RECTIFIERS AND APPLIANCES AS WELL AS THE RECEPTACLES FOR THE TWO HEATER LAMPS & THE POWER SWITCH.			CZD 10210 DAG COMPASS: USED AS A MEANS OF SIGHTING WITH THE MODEL DAG EQUIPMENTS BY BEING FASTENED INSIDE OF THE LOOP DIRECTLY ABOVE THE LOOP STEM.			CAFN 10217 OAS MARKER BUOY: HOLLOW. WATER TIGHT METAL CYLINDER, TAP-PEKED AT BOTH ENDS AND HAVING SUITABLE FINS AND BALLAST TO MAINTAIN VERTICAL AND HORIZONTAL TRIM WHILE UNDER WAY. IS TOWED ABOVE THE HOUSING (CM-10216) SO THAT POSITION OF HOUSING CAN BE OBSERVED		
*FIRST PURCHASE: NX99-20953 4/1/43 CM:X-61790A-1 AUG. 44 FIG G			5/21/43 CIA:HA.C.1 NOV. 43		CIA:NSA-22 2/26/42	6/7/43 CM:ASX-53685 NOV. 43		CM:ASX-33814 ISSUE 1
CVH 10203 RBZ CANVAS CARRYING CASE: FABRIC USED IS 50" SULPHUR DYED OLIVE DRAB SATEEN.			CRP 10211 SO-1 SPARK GAP: HAS 5 PINS WHICH GIVES APPROX 400 CY REPETITION FREQUENCY AT 4800 RPM. PHASE AND GAP SPACING ADJUSTMENT ARE PROVIDED. PEAK RATING IS 8000 VOLTS, 80 AMPS.			CAFN 10218 OAS CABLE WINCH: ARRANGED TO ACCOMMODATE 1200 FEET OF STEEL CABLE USED WITH THE HOUSING (CM-10216). MANUALLY OPERATED BY TWO CRANKS, HAS HAND-OPERATED BRAKE; ARRANGED TO MOUNT ON DECK OF TOWING BOAT.		
4/13/43 SEPT 43		CEX:JZ-58 5/20/43	5/27/43 SEPT 43			6/7/43 CM:ASX-33660 NOV. 43		CM:ASO-33813 ISSUE 1
CVH 10204 RBZ HEADPHONE HELMET: CLOTH HELMET. ADJUSTABLE.			CRP 10212 SO-1 SPRAK GAP: HAS 7 PINS WHICH GIVES APPROX 400 CYCLE REPETITION FREQUENCY AT 3450 RPM. PHASE AND GAP SPACING ADJUSTMENT ARE PROVIDED. PEAK RATING IS 8000 VOLTS, 80 AMPS.			CAFN 10219 OAS HOUSING CRADLE: ARRANGED TO MOUNT ON THE DECK OF THE TOWING BOAT; PROVIDED WITH A CLAMP TO HOLD HOUSING (CM-10216) SECURELY WHEN NOT BEING TOWED.		
4/20/43 SEPT 43		CEX:JZ-48 5/20/43	5/27/43 SEPT 43			6/7/43 CM:ASX-33871 NOV.. 43		CM:ASX-33814 ISSUE 1
CNW 10205 NX99-28012 CARRYING CASE: PLYWOOD CARRYING CASE FOR HOUSING NAVY TYPES CRR-49295, CRR-23367, HEADPHONES AND CABLES.			CM-10213 MK 12 BLOWER AND FILTER (BLOWER MK 2 MOD 0): USED TO FORCE FILTERED AIR INTO THE CM-20ACC POWER SUPPLY ASSEMBLY AND CM-50ACP POWER CONTROL AMPLIFIER ASSEMBLY.			CAFN 10220 OAS MARKER BUOY CRADLE: ARRANGED TO MOUNT ON THE DECK OF THE TOWING BOAT; PROVIDED WITH A CLAMP TO HOLD MARKER BUOY (CM-10217) SECURELY WHEN NOT BEING TOWED.		
4/24/43 AUG. 44		CRR:0AR96139B	6/2/43 FEB. 45		CM:D-151557 ISSUE 1	6/7/43 CM:ASX-33881 NOV. 43		CM:ASR-33678 ISSUE 1

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION		
CAFN 10221 OAS SPARE PARTS BOX: BOX FOR NECESSARY SPARE PARTS FOR OAS EQUIPMENT.			CUO 10228 *GEN USE MOUNTING BASE: CONSISTS OF A SUPPORT CHANNEL AND 4 LORD SHOCK MOUNTS. FOR MOUNTING CUO-46212, CUO-46215 AND CUO-46214 CONVERTERS.			CRY-10234 MENTS, EACH CONTAINING A SHOCK MOUNTED SHELF: RIGHT COMPARTMENT HOUSES THE RECTIFIER POWER UNIT, CENTER COMPARTMENT HOUSES THE MODULATOR, LEFT COMPARTMENT HOUSES THE TRANSMITTER (-52ACS OR SIMILAR) AND RF TO IP CONVERTER (-46ABM OR SIMILAR).				
6/7/43 CW:ASR-33458 MAR. 44		CW:ASO-33517 ISSUE 1	*FIRST PURCHASE: NXsa-31103 6/30/43 SEPT 43							
RQ-10222 OAT SPARE PARTS BOX: USED TO CARRY ALL NECESSARY SPARE PARTS FOR MODEL OAT EQUIPMENT INCLUDING CABLES AND PATCH CORDS. DIMENSIONS: 12 1/4" X 32" X 18". WEIGHT 155 LBS.			CMD 10229 ARD-2 RA 10F 285C MOUNTING RACK: MOUNTS NAVY TYPE CMD-50ADC AMPLIFIER. PROVIDES SHOCK MOUNTING FOR THIS UNIT.			CW-10235 OBC CALIBRATING FIXTURE: CONSISTS OF A WATERTIGHT FIXTURE PROVIDED WITH THREE JACKS INTO WHICH DETONATORS MAY BE INSERTED AND FIRED FOR CALIBRATION PURPOSES. IT IS MOUNTED AS THE COVER OF A NAVY C MASTHEAD CONNECTION BOX LOCATED ON A MAST AT THE REAR OF THE SUBMARINE.				
6/11/43 FEB. 45		RQ10F112A	7/2/43 P-702A NOV. 43			8/19/43 D-173193 NOV. 43		CW:ESO-671100 ISSUE 1		
CYZ 10223 *GEN USE EMERGENCY ELECTRONIC REPAIR KIT: CONSISTS OF STEEL BOX WITH SET OF TOOLS: 1 CHK-60068 VOLT-OHM MILLIAMETER (OR EQUIVALENT) FLASHLITE WITH EXTRA BULB, SOLDER IRON & STAND, SOCKET WRENCH, NEUTRALIZING TOOL KIT, NEON LITE *FIRST PURCHASE: NXsa-25934 6/16/43 SEPT 43			CAFN 10230 OAU HOUSING: METAL DRUM CONTAINING AN AMPLIFIER, A 6 VOLT STORAGE BATTERY AND AN AMPLIFIER CONTROL UNIT. TOP OF HOUSING HAS A PROTECTED GLASS WINDOW FOR VIEWING THE METERS OF THE AMPLIFIER CONTROL UNIT. INCLUDES SUPPORT, SUSPENDED FROM BOTTOM 7/2/43 CW:ASX-33815 MAR. 44			CW-10235 THE DETONATORS ARE FIRED FROM THE EQUIPMENT INSTALLED IN THE INTERIOR OF THE SUBMARINE.				
		CYZ 10223 TESTER, WIRE, 1# SPOOL SOLDER, OPEN END WRENCH SET, DOUBLE END ADJUSTABLE WRENCH, SET OF 8 SCREWDRIVERS (2 PHILLIPS), SET OF 4 PLIERS, 6" STEEL RULE, OVERALL DIMENSIONS 17" LONG 6 1/2" WIDE, 7 1/2" DEEP, 28 POUNDS.	CAFN 10230 OF HOUSING FOR TRANSMITTING-RECEIVING PROJECTORS.			CW-10235-A OBC CALIBRATING FIXTURE CONSISTS OF THREE SOCKETS SPACED EQUALLY AROUND A HEAVY BRONZE CYLINDER WHICH IS ALSO EQUIPPED WITH A PRESSURE PROOF GLAND FOR TERMINATING THE CABLE AND WHICH ALSO SERVES AS A CONNECTION BOX. SAME AS -10235 EXCEPT HAS HEAVIER CAST- 8/26/44 D-173369 FEB. 45		BL-105244 ISS 1		
CUX 10224 GEN USE MET BATTERY FILLING DEVICE: VACUUM PUMP DEVICE USED FOR FILLING MET BATTERY OF 2 7/16" X 2 3/4" DIMENSIONS. USED TO FILL NAVY TYPE -19048 PRIMARY BATTERY.			CAFN 10231 OAU SPARE PARTS BOX: BOX CONTAINING A COMPLETE SET OF SPARE PARTS FOR THE OAU EQUIPMENT.			CW-10235-A ING AND SOCKETS ARE AFFIXED BY MEANS OF SHOCK MOUNTS INSTEAD OF BRAISING.				
6/16/43 SEPT 43			7/2/43 CW:ASR-33460 MAR. 44			CW:ASO-34064 ISSUE 2				
CFE 10225 DAS-1 MOUNTING BASE: FOR MOUNTING A RECEIVER AND INDICATOR. CONSISTS OF 2 PLATES SEPARATED BY SHOCK MOUNTS. LOWER PLATE IS BOLTED IN POSITION AND RECEIVER AND INDICATOR ARE SUPPORTED BY UPPER PLATE.			CUO 10232 ROA CABINET: INCLUDES CABINET AND SHOCK MOUNTED RACK. ENCLOSES NAVY TYPE CUO-46ACT RADIO RECEIVER.			CW-10236 OBC HYDROPHONE MOUNTING: CONSISTS OF A VERTICAL BRASS PIPE AND BASE THAT IS FASTENED TO THE CONNING TOWER OF THE SUBMARINE FOR MOUNTING THE HYDROPHONE. A CAGE IS PROVIDED AT THE TOP FOR LATRICAL SUPPORT AND PROTECTION OF THE HYDROPHONE 8/19/43 D-173195 NOV. 43		CW:ESO-671097 ISSUE 1		
6/24/43 SEPT 43			7/9/43 S-9807 SEPT 43		E114 7/28/43					
RW-10226 GEN UWS USE PUMP ASSEMBLY: AIR PUMP, VACUUM AND PRESSURE. INCLUDES MOTOR, 2 FILTERING FLASKS, A COMBINATION PRESSURE & VACUUM GAGE, ALL MOUNTED INSIDE OF AN OAK CABINET. SUPPLY: 115/1760			CFN 10233 BN CABINET: CABINET FOR HOUSING THE ASSEMBLY OF NAVY TYPES CFN-43 ACB, CFN-46 ACM AND CFN-52 ACQ SHOCK-MOUNTED, AND INCLUDES A FOLDING TYPE FRONT COVER.			CW-10237 *SEE BELOW RELEASE PACK: CONSISTS OF A WELDED FRAMEWORK HAVING A STORAGE CHAMBER FOR TEN PRACTICE DEPTH CHARGES (PDC) AND A MECHANISM WHICH EJECTS ONE PRACTICE DEPTH CHARGE WHEN FOR USE WITH OBC 8/19/43 D NOV. 43		CW:ESO-671097 ISSUE 2		
6/25/43 SEPT 43			7/26/43 MAR. 44		300607G-1 300871					
CCT 10227 RBS MOUNTING RACK: TYPE -46217 RECEIVER MOUNTS IN THIS UNIT BY THUMB-SCREWS. THIS RACK RESTS ON SHOCK MOUNTS ON TYPE -20235 RECTIFIER POWER-AMPLIFIER UNIT.			CRY-10234 *SEE BELOW HOUSING: MADE OF 1/8" STEEL: SHAPED FOR MOUNTING IN A SEMI-CIRCLE SIX FEET IN DIAMETER; INCLUDES THE BLOWER, TERMINAL BOARDS, TWO FILAMENT TRANSFORMERS, RF MATCHING TRANSFORMER. IS DIVIDED INTO THREE COMPART- *MK 26, MODS 1 & 2 8/16/43 M1-18087 NOV. 43			CW-10237 POWER IS APPLIED TO THE SOLENOID, OR BY MANUAL MEANS. MEANS ARE PROVIDED ON THIS RACK FOR TESTING THE CONTACT OF THE PRACTICE DEPTH CHARGE AGAINST BEING FALSELY CLOSED AND FOR SAFELY ATTACHING THE DETONATOR TO THE PRACTICE DEPTH CHARGE. THIS RACK IS MOUNTED ON THE DECK OF THE PRACTICING SURFACE CRAFT.				
6/28/43 NOV. 43		D-5901						B-19582		
			ASSIGNED ISSUED					ASSIGNED ISSUED		
DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER		DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER		DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CM-10238	OBC	CALCULATING BOARD: CONSISTS OF AN ENGRAVED BOARD AND ASSOCIATED SLIDING AND ROTABLE SCALES AND PROTRACTORS OF PLASTIC. PROVIDES A MEANS FOR CALCULATING THE ACCURACY OF THE SURFACE SHIP'S ATTACK FROM THE DATA THAT ARE GIVEN BY THE ATTACK METER EQUIPMENT	CM-10245	JS. CXEW	COVER ASSEMBLY: PLASTIC COVER INCLUDING ALL CONNECTOR HARDWARE.	CABN-10253	SG-2S	ANTENNA TOWER: 100' ANTENNA TOWER. SAME AS CXK-10247 EXCEPT FOR INTERNAL BRACING.
8/19/43	D-173276	CW:ES-808805	9/1/43		CW:ESR 67550	9/22/43	TYPE B	REI
NOV. 43		ISSUE 1	NOV. 43		ISSUE 0	NOV. 43		
		CM-10238	CM-10246	AN/FGC-1A	CABINET: HOUSES ONE NAVY TYPE CW-35031 FREQUENCY SHIFT KEYS UNIT AND ONE CW-20217 OR CW-20230 RECTIFIER POWER UNIT. HAS CASTERS TO PROVIDE FOR MOBILITY.	CM-10254	SG-2S	ANTENNA MOUNTING BASE: USED TO SUPPORT TYPE CRP-50A0J ANTENNA ASSEMBLY FOR INTERNAL BRACING.
		ON THE SUBMARINE. THE RELATIVE COURSE OF THE SURFACE SHIP WITH RESPECT TO THE SUBMARINE, AND THE STIPULATIONS-THEORETICAL DEPTH AND SPEED OF THE SUBMARINE, THE SPEED OF DESCENT OF THE SIMULATED DEPTH CHARGE, AND THE POSITION WITH RESPECT TO THE SURFACE BOAT WHERE THE CHARGE WOULD BE DROPPED.	*B-405455, 1SS. 1			9/22/43	DRP:EW-5406	CRP:M-22M1-X1
			9/1/43	X-61790M-1	CW:PRELIM SKETCH	NOV. 44		SUB F
			AUG. 44		B-401710 *			
CKX-10239	SG-2S	ANTENNA TOWER: 100 FT. ANTENNA TOWER - IMPROVED CKX-66 AFO. SAME AS CKX-10247 EXCEPT LIGHTER (6115# INSTEAD OF 13,500#). 8 FT 3 INCH SQUARE AT BOTTOM INSTEAD OF 15 FT 3 INCH SQUARE AT TOP ARE SAME AS THOSE OF CKX-10247.	CKX-10247	SG-2S	ANTENNA TOWER: 100 FEET HIGH. SAME AS CKX-10239 EXCEPT HEAVIER (13,500# INSTEAD OF 6115#). 15 FT SQUARE AT BOTTOM INSTEAD OF 8 FT 3 IN. MOUNTING PROVISIONS PROVIDED AT TOP ARE SAME AS THOSE OF CKX-10239. SAME AS CABN-10253 EXCEPT FOR INTERNAL BRACING.	CM-10255	QGB	TRAINING MECHANISM: INPUT: 230V DC AT VARYING CURRENT AND 60V DC AT 0.4 AMPS. CONSISTS OF A MOTOR DRIVEN MECHANISM, SHAFT, AND LOWER BEARING ASSEMBLY. USES 5 DG AND 5G SYNCHROUS IN TRAINING PROJECTORS. SAME AS -10154 EXCEPT FOR SUBSTITUTION OF 50G SYNCHRO
8/25/43		P 29810	9/4/43		CKI:P80-1226-G	9/26/43	CRV:41-16726	CRV:M-306329-10
NOV. 43		REV 0			REV 1	NOV. 44		REV 1
CMN-10240	YD-3	TWO WHEEL TRAILER: TWO WHEEL TRAILER. CHASSIS IS SPRING MOUNTED. USES 600 X 16-6 PLY TIRES. SAME AS NAVY TYPE CMN-10100 EXCEPT FOR OMISSION OF BRAKES, TAIL LIGHT AND STOP LIGHT.	CRP-10248	SO-3	ANTENNA ASSEMBLY TRIPOD: SIMILAR TO CRP-10207 EXCEPT FOR CROSS BRACING PROVIDED. LIFTING HANDLES PROVIDED. LOCATION AND BRACING OF THIRD LEG, MOUNTING PROVISIONS (TOP AND BOTTOM) AND OVERALL HEIGHT ARE IDENTICAL.			CM-10255
8/25/43			9/13/43	WX-5295				FOR 5CT SYNCHRO.
NOV. 43		CDE:B-1881A	NOV. 43					
CMN-10241	YC-3	TRAILER: USED TO HOUSE AND PROVIDE MEANS OF TRANSPORTING THE MODEL YC-3 EQUIPMENT. USES DUAL WHEELS WITH 7.50 X 20 TIRES. AXLE OF SIZE TO SUPPORT 10,000 POUNDS. SIMILAR TO NAVY TYPE CMN-10070 EXCEPT FOR WHEEL SIZE AND IS OF BETTER DESIGN.	CRP-10249	SO-3, SO-b	SPARK GAP: USED IN 21ACD-4.	CM-10256	Q8H	WATER STATION UNIT: INCLUDES TYPE -78194-A ROCHELLE SALT PROJECTOR. SIMILAR TO TYPE -10181 EXCEPT HAS 4 DOUBLE SECTION COPPER OXIDE RECTIFIERS AND 4 CAPACITORS.
8/25/43		CDE:B-1880A	9/13/43	WX-5666	CRP:M-33C-W67	9/27/43	CA-10	8216
NOV. 43			AUG. 44		SUB C	AUG. 44		
CDE-10242	YD-3	EQUIPMENT HOUSING: HOUSES AND HAS MOUNTING FACILITIES FOR MODEL YD-3 EQUIPMENT. SIMILAR TO NAVY TYPE CMN-10072 EXCEPT FOR OMISSION OF ANTENNA TUNING BOX, POSITION OF GAS TANK MOVED, MOUNTING HOLES RELOCATED. DOES NOT HAVE LOUYRES ON ENDS.	CRP-10250	SO-3	MOUNTING BASE: PROVIDES ANTI-SHOCK MOUNT (FOR A CRP-50A0J MODULATOR, CRQ-211095 MOTOR-ALTERNATOR UNIT, AND A CRP-10249 SPARK GAP)	CRJ-10257	OAX	CARRYING CASE: METAL CARRYING CASE WITH NECESSARY HANDLES AND LATCHES AND PROVISIONS FOR STOWING TYPE -50166 SPEAKER AMPLIFIER UNIT AND TYPE -51061 HYDROPHONE ASSEMBLY.
8/25/43		CDE:B-1883A	9/13/43	PART OF WX-5427	CRP:M-5D-W76	10/1/43	161-C	4327
NOV. 43			NOV. 43		SUB B	MAR. 44		REV 0
CCT-10243	RBS	SPARE PARTS BOX: MADE OF 0.0625" STEEL. 9" HIGH X 18" LONG X 15" DEEP. DOES NOT INCLUDE ANY OF THE CONTENTS OF THE BOX.	CRV-10251	*NJ-8 ACCESSORY	STRAIGHT LINE RECORDING	CM-10258	TDV	CABINET:
8/27/43	D-10417	CCT:B-1762S	(*NXSS-29260)			10/5/43		
NOV. 43		REV 0	9/16/43	CIP:ES-17	CIP:ES-17	NOV. 43		
			NOV. 43					
CM-10244	JS.CXEM	CANVAS CARRYING CASE:	CRP-10252	SO-1	MOUNTING RACK: CRADLE TYPE FOR MOUNTING TYPE -23ADZ ACCESSORY CONTROL UNIT AND TYPE -55A0Q PPI.	CTJ-10259	TDP	TEST PROBE ASSEMBLY: CONSISTS OF A MOUNTING STRIP WITH CLIPS FOR MOUNTING EIMAC CONDENSER. TYPE NUMBER INCLUDES 15 FT TEST CABLE BUT DOES NOT INCLUDE THE EIMAC CONDENSER.
8/30/43		CW:ESR 667537	9/21/43	WX-5611	CRP:M-3PI-M5	10/6/43		
NOV. 43		ISSUE 1	NOV. 43			NOV. 43		

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

3.10-14

Class 10—Miscellaneous

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CQA-10260 OAB	10/6/43 NOV. 43	CQA:C-10141 REV 0	CFO-10267			CAFJ-10270-B GEN. USE RE13A836C		
CARRYING CASE: WOODEN CASE, WITH HINGED LID AND 2 HANDLES, FOR TRANSPORTING THE CQA-43053 TRANSMITTER-RECEIVER. INCLUDES ONE AN-3100-18-2S RECEPTACLE AND ONE AN-3100-16S-11S RECEPTACLE.			PRESSURE SWITCH TO CUT OUT AT 40 LB/SQ IN. AND CUT IN AT 20 LB/SQ IN. TANK PRESSURE GAGE 0-150 LB/SQ IN. AND LINE PRESSURE GAGE 0-60 LB/SQ IN. SAME AS CFO-10117 EXCEPT FOR SUPPLY.			FOIL ASSEMBLY CONSISTS OF 2400 ± 60 STRIPA OF ALUMINUM FOIL AS FOLLOWS: (A) 1200 ± 30 STRIPS OF 250 ALUMINUM FOIL 3/16" ± 1/32" WIDE, .00035" ± .00005" THICK AND 20" ± 1/10" LONG. 12- POUND TISSUE PAPER SHALL BE FIRMLY GLUED ON EACH SIDE OF FOIL. (B) 10/5/44 DEC. 44		
CQA-10261 OAB	10/6/43 NOV. 43	CQA:C-10149 REV 1	CFO-10268 NX33-33771			CAFJ-10270-B		
SPARE PARTS BOX: WOODEN BOX WITH HINGED LID AND 2 HANDLES.			DEHYDRATING UNIT: CONSISTS OF 2 SILICA-GEL TANKS IN PARALLEL SO THAT ONLY 1 TANK IS USED AT ANY ONE TIME. ELECTRIC HEATER SUPPLY IS 115V DC. TEMPERATURE IS THERMOSTATICALLY CONTROLLED BY PENN MAGNETIC SWITCH SET TO CUT IN AT 185° AND CUT OUT AT 190°C. 10/14/43 MAR. 44			1200 ± 30 STRIPS SHALL BE IDENTICAL WITH FOREGOING EXCEPT .0008" THICK ± .00008" HARD (UNANNEALED) ALUMINUM FOIL WITHOUT PAPER. STRIPS SHALL BE ARRANGED IN STACKS OF 300 ± 15. THE BARE FOIL AND THE PAPER BACKED FOIL ALTERNATING IN THE STACK.		
CQA-10262 OAB	10/6/43 NOV. 43	CQA:C-10134 REV 0	CFO-10268			CAFJ-10270-C GEN. USE RE13A836C		
SPARE PROJECTOR BOX: WOODEN BOX WITH HINGED LID AND 2 HANDLES FOR CARRYING ONE CQA-78218 PROJECTOR.			EACH TANK HAS MANUAL ON-OFF SWITCH AND IS DESIGNED TO PASS 1 1/2 CU FT/MIN. AND REDUCE HUMIDITY TO LESS THAN 20% FOR PERIOD OF 8 HOURS. SAME AS CFO-10118 EXCEPT FOR SUPPLY.			FOIL ASSEMBLY CONSISTS OF 800 ± 40 STRIPS OF ALUMINUM FOIL AS FOLLOWS: (A) 400 ± 80 STRIPS OF HARD (UNANNEALED) ALUMINUM FOIL 1/4" ± 1/32" WIDE .0008" ± .0001" THICK AND CUT TO A LENGTH INDICATED IN PARENTHESIS FOLLOWING TYPE NUMBER. 12-POUND TISSUE TO 10/5/44 DEC. 44		
CQA-10263 OAB	10/6/43 NOV. 43	CQA:C-10135 REV 0	RMM 10269 MAL			CAFJ-10270-C		
HOUSING: STREAMLINED, WITH WOODEN TOP SECTION AND STEEL BOTTOM SECTION. HOUSES CQA-78218 PROJECTOR:			TRAILER ASSEMBLY: CONSISTS OF A MILLYS-OVERLAND STANDARD 1/4 TON TRAILER. SPARE PARTS BOX FOR TCS AND AN/ARC-4, AND ONAN STANDARD MODEL 300 WATT, 28 VOLT GAS ENGINE GENERATOR SET 10/14/43 NOV. 43			BE FIRMLY GLUED ONE EACH SIDE OF FOIL. REMAINING 400 ± 40 STRIPS IDENTICAL WITH FOREGOING EXCEPT .0008" THICK ± .00008 HARD (UNANNEALED) ALUMINUM FOIL WITHOUT PAPER BACKING.		
CM-10264 TDY	NOV. 43		CAFJ 10270 NX33-36737 RE 13A836A			CAFJ-10270-D GEN. USE RE13A836C		
SHIPPING CONTAINER			FOIL ASSEMBLY: CONSISTS OF 1600 1/4" STRIPS OF A SPECIFIED LENGTH UP TO 20" OF 0.00035 ALUMINUM FOIL LAMINATED BETWEEN 12 LB. TISSUE PAPER IN 8 STACKS OF 200 EACH HAVING A CROSS SECTION OF 5/8" X 2". THE 8 STACKS ARE WRAPPED IN 1 1/2 TURNS OF 10/28/43 NOV. 43			FOIL ASSEMBLY CONSISTS OF 3600 ± 60 STRIPS OF ALUMINUM FOIL AS FOLLOWS: (A) 1800 ± 30 STRIP OF 250 ALUMINUM FOIL 1/8" ± 1/32" WIDE .00035" ± .00005" THICK AND 20" ± 1/10" LONG. 12-POUND TISSUE PAPER SHALL BE FIRMLY GLUED ON EACH SIDE OF FOIL. (B) 10/5/44 DEC. 44		
CQA 10265 OAB	10/8/43 NOV. 43	CQA:C-10135 REV 0	CAFJ 10270			CAFJ-10270-D		
HOUSING CARRYING CASE: WOODEN BOX, WITH HINGED LID AND 2 HANDLES. USED TO TRANSPORT THE CQA-10263 HOUSING AND CQA-78218 PROJECTOR.			CARDBOARD WHICH IS UNSEALED WITH OPEN ENDS. TYPE NUMBER TO INDICATE LENGTH BY 3 CODED NUMERALS IN PARENTHESIS TO NEAREST 1/8" VIZ: LENGTH OF 8 3/8 OR 16 7/8. TYPE NO. IS CAFJ-10270 (083) OR CAFJ-10270 (167) RESP.			1800 ± 30 STRIPS SHALL BE IDENTICAL WITH FOREGOING EXCEPT .0008" THICK ± .00008" HARD (UNANNEALED) ALUMINUM FOIL WITHOUT PAPER. STRIPS SHALL BE ARRANGED IN STACKS OF 300 ± 15. THE BARE FOIL AND THE PAPER BACKED FOIL ALTERNATING IN THE STACK.		
CADY-10266 QFK	10/11/43 MAR. 44	9374	CAFJ 10270-A(1) NX33-36737 RE 13A836B			CAFJ-10270-E GEN. USE RE13A836C		
SPARE PARTS BOX:			FOIL ASSEMBLY CONSISTS OF 1600-3/16" STRIPS OF A SPECIFIED LENGTH UP TO 20" OF 0.00035 ALUMINUM FOIL LAMINATED BETWEEN 12 POUND TISSUE PAPER IN 8 STACKS OF 200 EACH HAVING ACROSS SECTION OF 3/4" X 1 5/8". THE 8 STACKS ARE WRAPPED IN 1 1/2 TURNS 2/22/44 SIG CORPS:CHB/1 TO 7 MAR. 44			FOIL ASSEMBLY CONSISTS OF 1200 ± 60 STRIPS OF ALUMINUM FOIL AS FOLLOWS: (A) 600 ± 30 STRIPS OF 250 ALUMINUM FOIL 3/16" ± 1/32" WIDE, .00035" ± .00005" THICK AND 20" ± 1/10" LONG. 12-POUND TISSUE PAPER SHALL BE FIRMLY GLUED ON EACH SIDE OF FOIL. (B) 10/5/44 DEC. 44		
CFO-10267 NX33-33771	10/14/43 MAR. 44		CAFJ10270-A(1)			CAFJ-10270E		
AIR COMPRESSOR UNIT: SUPPLY: 115V DC SINGLE CYLINDER, SINGLE STROKE, 2" BORE, 1 3/4" STROKE, 400 RPM, 7 1/2" PULLEY, DELIVERS 3/4 CU FT/MIN. INCLUDES: MOTOR RATED 1/4 HP, 115 V DC, 40°C CONT, 1750 RPM, SLEEVE TYPE BEARINGS 1 3/4" PULLEY, 5 GALLON TANK WITH			OF CARDBOARD WHICH IS UNSEALED WITH OPEN ENDS. TYPE NUMBER TO INDICATE LENGTH BY 3 CODED NUMERALS IN PARENTHESIS TO NEAREST 1/8" VIZ: LENGTH OF 8 3/8" OR 16 7/8". TYPE NO. IS CAFJ-10270-A(083), CAFJ-10270A(167) RESPECTIVELY. SAME AS -10270(1) EXCEPT FOR SIZE OF STRIP.			600 ± 30 STRIPS, SHALL BE IDENTICAL WITH THE FOREGOING EXCEPT .0008" THICK ± .00008" HARD (UNANNEALED) ALUMINUM FOIL WITHOUT PAPER. STRIPS, SHALL BE ARRANGED IN STACKS OF 300 ± 15. THE BARE FOIL AND THE PAPER BACKED FOIL ALTERNATING IN THE STACK.		

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CAFJ-10270-F	GEN. USE	RE13A836C	CW-10276	FOR USE WITH MAH		CW-10233	MARK 22	
<p>FOIL ASSEMBLY CONSISTS OF A SLEEVE OVERALL DIMENSIONS 1 3/4" X 1 15/16" X 18". CONTENTS WITHIN SLEEVE: (A) 17 CUTS OF STANDARD SPLIT HARD (UNANNEALED) ALUMINUM FOIL .0008" ± .00008" THICK SHALL HAVE 15 LBS ± 1 1/2 POUNDS TISSUE GLUED TO A PORTION OF IT'S 10/5/44 DEC. 44</p>			<p>SUBMERSIONPROOF RECTIFIER CASE: SHEET STEEL CASE CONTAINING TYPE -20263 RECTIFIER POWER UNIT HAS 2 HANDLES. SUBMERSIONPROOF. INCLUDES A MOTOR AND BLOWER. 11/12/43 PART OF X-6622A CW:8-401595 NOV. 43 ISSUE 2 ISSUE 2</p>			<p>FRAME ASSEMBLY CONSISTS OF 3 SECTIONS ARRANGED FOR INSTALLATION IN A DIRECTOR. PROVIDES FOR MOUNTING OF INDIVIDUAL UNITS OF CW-50ADQ AMPLIFIER-POWER ASSEMBLY, INTER-UNIT CABLING, COOLING BLOWERS, INCOMING CABLE TERMINATIONS AND A STRIP HEATER. 12/6/43 D-151703 BR-13629 MAR. 44 ISSUE 3</p>		
CAFJ-10270F			CW-10277	FOR USE WITH MAH.		CAHT	*SEE BELOW	
<p>LENGTH. DIMENSIONS OF BOTH FOIL AND TIS- SUE SHALL BE 3/16" ± 1/16" WIDE AND 1.9" ± 0.1" LONG. STRIPS SHALL BE ARRANGED IN STACKS OF 200 EACH, 8 STACKS TO BE CON- TAINED WITHIN SLEEVE. (B) 3 CUTS OF STANDARD INTERLEAVED. PACKAGED 2400 ± 120 STRIPS PER CUT.</p>			<p>RECTIFIER SHIPPING CHEST; FIBER AND PLYWOOD CONSTRUCTION. FOR SHIPPING TYPE -20263 IN TYPE -10276 SUB- MERSIONPROOF CASE. HAS PROVISIONS FOR NECESSARY SPARES FOR RECTIFIER. *PART OF X-66222A ISSUE 2, KS-15023 LO 1 11/12/43 *SEE ABOVE CW:KS-15023LO1 NOV. 43 FIG 1 ISSUE 1</p>			<p>CA08 10284 SPARES TRAILER TWO WHEEL, 1/2 TON, STEEL CARGO TRAILER. FOR TRANSPORTING MOBILE SPARES AND AUXILIARY CRP-73024 GAS ENGINE GENERATOR SET. *SO-7M/M & SO-12M/M 12/7/43 CRP:RX-1036 CRP:M-22J-X4 AUG. 44 SUB 0</p>		
CAFJ 10271	HXsr-36737	RE 13A836A	CW-10277			CAHU 10285	*SEE BELOW	
<p>FOIL ASSEMBLY: CONSISTS OF 50 STRIPS OF A SPECIFIED LENGTH (20" UP TO 60") OF 1/4" WIDE 0.00035 ALUMINUM FOIL LAMINATED BETWEEN 1/4" STRIPS OF 30 LB. AND 90 TO 100 LBS PAPER. STRIPS ARE ARRANGED IN ONE STACK 1/4" X 3/4" AND WRAPPED IN 1 1/2 TURNS 10/28/43 NOV. 43</p>			<p>EQUIPPED WITH HINGED COVER AND HANDLES. *SO-7M & SO-12M 12/7/43 CRP:RX-1037 CRP:M-22M6-W5 DEC. 43 SUB A</p>			<p>EQUIPMENT TRAILER 4 WHEEL, STEEL TRAILER. FOR TRANSPORTING ENTIRE EQUIPMENT EXCEPT MOBILE SPARES AND AUXILIARY GAS ENGINE GENERATOR SET. CAHW 10286 GEN RADIO USE JACK COVER ASSEMBLY 12/9/43 CCT:D-6711 DEC. 43 REV 0</p>		
CAFJ 10271			CDO-10278	MAH		10287	GENERAL USE	
<p>OF CARDBOARD WHICH IS UNSEALED WITH OPEN ENDS. TYPE NO. IS TO INDICATE LENGTH BY 3 CODED NUMERALS IN PARENTHESIS TO NEAREST 1/8", VIZ: FOR LENGTH OF 45 5/8" AND 60" TYPE NO. IS CAFJ-10271 (455) AND CAFJ-10271 (600) RESP.</p>			<p>SUBMERSIONPROOF CASE: SHEET STEEL CASE FOR CONTAINING TYPE -73027 GAS ENGINE GENERATOR SET. SUB- MERSION PROOF. 11/12/43 CW:PART OF KS-5816 NOV. 43 LIST 01, ISSUE 2</p>			<p>INJECTION GUN FOR USE WITH MOLDS FOR SPLICING AN TYPE RG-17/U RF CABLES TOGETHER. HAS 1"-20 THREAD FITTING. 12/13/43 DEC. 43</p>		
RW-10272	JR-2		CW-10279	MAH		10288	GENERAL USE	
<p>MOUNTING RACK: HOUSES A NAVY TYPE -20186, -23402 AND -50123. SAME AS -10161 EXCEPT SLIGHTLY LARGER. 10/29/43 NOV. 43</p>			<p>SUBMERSION PROOF RADIO CASE: SHEET STEEL CASE FOR CONTAINING RT-19/ARC-4 XMTR-REC'R, C-51/ARC-4 CONTROL UNIT, DY-10/ARC-4X, RADIO EQUIP- MENT ACCESSORIES AND OPERATING SPARES. INCLUDES BLOWER MOTOR FOR VENTILATION. 11/12/43 D-151999 BR-36933 MAR. 44 ISSUE 1</p>			<p>DIELECTRIC MOLD FOR PREPARING WIRER CONDUCTOR OF POLYETHYLENE (OR EQUIVALENT) DIELECTRIC USED IN SPLICING AN TYPE RG-17/U RF CABLES. 12/13/43 DEC. 43</p>		
CMH-10273	TCG SERIES		CMX-10280	RCT & RCU		10289	GENERAL USE	
<p>COOLING UNIT: INPUT 250/3/25. INCLUDES MOTOR, PUMP, AND TANK SIMILAR TO TYPE -10033. 11/3/43 CG:P-7762338 NOV. 43 REV 4</p>			<p>RECORD CABINET: FIR PLYWOOD CABINET DESIGNED TO HOLD 200 TEN OR TWELVE INCH RECORDS IN FOUR COM- PARTMENTS. TWO HANDLES PROVIDED FOR CARRYING. 11/15/43 E 690427 E-690427 AUG. 44 REV D</p>			<p>JACKET MOLD FOR PREPARING OUTER JACKET OF POLYVINYL CHLORIDE (OR EQUIVALENT) USED IN SPLICING AN TYPE RG-17/U RF CABLES. 12/13/43 DEC. 43</p>		
CHZ-10274	ANT. CHZ-66AFU		RW-10281	OBK		CAFJ 10275	FOR USE WITH YG	
<p>SHEAR VALVE ASSEMBLY: CANCELLED</p>			<p>ELECTRONIC REPAIR KIT 11/16/43 NOV. 43</p>			<p>ANTENNA TRIPPOD ASSEMBLY: 11/9/43 MI-8780 CAFS:HW-306132 NOV. 43 SUB 2</p>		
CHZ:A2584			CAGJ 10282	CPR-55A00		CRH10290	TBY-6.7.8	
<p>11/6/43 NOV. 43</p>			<p>LAB DATA CARD THREE LAMINATED VINYL PLASTIC DATA CARDS BRAD-ED TOGETHER AND CANVAS CASE. CARDS HAVE GRAPHS THAT FIVE BOMB RELEASE DATA. 11/19/43 NOV. 43</p>			<p>SPARE PARTS BOX FOR CARRYING MOBILE SPARE PARTS. CON- SISTS OF STEEL BOX WITH 2 HANDLES AND A HINGED COVER WITH HASP AND STAPLE. 12/13/43 CRI:E-51941 CRI:E-51941 JAN. 44 REV 0</p>		
DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CAIK 10291	ASB SERIES		CPX 10299	OAX-1		CAHU 10304	SK-1M	
MOUNTING RACK: FOR MOUNTING TYPE -46ACJ RADAR RECEIVER.			CARRYING CASE METAL CARRYING CASE WITH NECESSARY HANDLES AND LATCHES AND PROVISIONS FOR STOWING TYPE -50175 SPEAKER AMPLIFIER UNIT AND TYPE -51065 HYDROPHONE ASSEMBLY. SIMILAR TO -10257.			EQUIPMENT TRAILER STEEL BODY AND WROG FRAME WITH SHEET METAL EXTERIOR AND PLYWOOD INTERIOR. WOOD FLOOR COVERED WITH LINOLEUM. DOUBLE DUAL WHEELS IN REAR AND DOUBLE WHEELS IN FRONT CONNECTED TO BODY BY 5TH WHEEL. EQUIPPED WITH HEATING SYSTEM & ALL 1/2/44 GER: CG:P-7766464 DEC. 44 REV 1, K-7894236		
12/20/43	WE-336	R-1847E	12/23/43					
AUG. 44		REV 5	JAN. 44					
CAIK 10292	ASB SERIES		CDB- 10300	JR-1		CAHU 10304		
MOUNTING RACK: FOR MOUNTING TYPE -52ACU RADAR TRANS- MITTER.			MOUNTING RACK STEEL CABINET 26 1/2" HIGH X 19 3/4" WIDE X 14 7/8" DEEP. MOUNTS AND HOUSES NAVY. TYPE CHL-20268 RECTIFIER POWER UNIT, CHL-23415 SWITCHING UNIT & CHL- 50171 AUDIO AMPLIFIER. SIMILAR TO NAVY TYPE RW-10161 MOUNTING RACK. HAS HINGED 12/29/43 CDB:697-NS CHL:02958 DEC. 44			NECESSARY STABILIZING EQUIPMENT. ONE DOOR ON CURB SIDE AND DOUBLE DOORS IN FRONT.		
12/20/43	WE-358	R-1802E						
AUG. 44		REV 4						
CAIK 10293	ASB SERIES		CDB- 10300			CAHU 10305	SK-1M	
MOUNTING RACK: FOR MOUNTING TYPE -52ACV RADAR TRANS- MITTER.			DOOR ON BACK TO PROVIDE ACCESSIBILITY TO UNITS.			AUXILIARY TRAILER 4 WHEEL, OPEN BODY. EQUIPPED WITH DRAW BAR FOR CONNECTION TO OTHER UNITS. USED TO HAUL AUXILIARY GAS ENGINE GENERATOR AND SPARE CABLE REEL.		
12/20/43	WE-357	R-1918E				1/2/44	MC-1	CG:T-7663505
AUG. 44		REV 3				DEC. 44		REV 1
CAIK 10294	ASB SERIES		CAHU 10301	SP-1M		CAJH 10306	SK-1M	
MOUNTING RACK: FOR MOUNTING TYPE -20ABX RECTIFIER POWER UNIT.			EQUIPMENT TRAILER ALL STEEL CONSTRUCTION. DUAL TANDEM WHEELS ON REAR WITH SINGLE DUALS IN FRONT AND 5TH WHEEL IN FRONT FOR STEER- ING. INSULATED SIDE WALLS & ROOF. HAS ALL STANDARD OPERATING ACCESSORIES. LEVELING & STABILIZING JACKS, WARNER 12/30/43 CG:K-7894235 10759-23 DEC. 44			DEHUMIDIFYING UNIT CONSISTS OF 2 1/4 TON CAPACITY COMPRESSOR UNIT, CONSISTING OF A COMPRESSOR, EVAPORATOR, CONDENSER ETC. AND POWERED BY A GASOLINE DRIVEN CONTINENTAL ENGINE, TYPE Y-69.		
12/20/43	WE-340	R-1769E				1/2/44	K-7895433	P-7766842
AUG. 44		REV 5				DEC. 44		
CAIK 10295	ASB SERIES		CAHU 10301			RQ- 10307	RQ-10310	
MOUNTING RACK: FOR MOUNTING EITHER A TYPE -14 AAC OR -14 AAU ANTENNA SWITCHING UNIT.			ELECTRIC BRAKES AND A HAND PARKING BRAKE. HAS CABLE-LIFT ELEVATOR IN ROOF. INTERNAL PROVISIONS FOR HEATING, VENTI- LATING & AIR CONDITIONING.			SCREEN AND ANALYZER MECHANISM: THIS SCREEN IS A WINDOW SECTION OF THE ANALYZER MECHANISM OF THE RECORDER ASSEMBLY RQ-10310. APPROXIMATELY SIX TIMES ACTUAL SIZE. A PART OF TYPE -10310 RECORDER PROJECTOR ASSEMBLY.		
12/20/43	WE-339	R-1849E				1/3/44		15606X
AUG. 44		REV 4				JAN. 44		11/29/43
CAIK 10296	ASB SERIES		CAHU 10302	SP-1M		RQ- 10308	RQ-10310	
MOUNTING RACK: FOR MOUNTING EITHER A TYPE -55 AAZ, TYPE -55 AAZ-1 OR A TYPE -55 AER RANGE INDICATOR.			OPERATIONS TRAILER ALL STEEL CONSTRUCTION. DUAL TANDEM WHEELS ON REAR WITH SINGLE DUALS IN FRONT & 5TH WHEEL IN FRONT FOR STEERING. INSULATED SIDE WALLS & ROOF. HAS ALL STANDARD OPERATING ACCESSORIES. LEVELING JACKS, WARNER ELECTRIC BRAKES & A HAND 12/30/43 CG:K-7894234 10759-22 DEC. 44			TRACE PROJECTOR FOR USE IN PROJECTING INDICATIONS OF A RECORDER OF TYPE -10307 SCREEN AND AN- ALYZER MECHANISM. INCLUDES A BLOWER AND SWITCH BOX AND IS ALL MOUNTED IN A RACK WHICH ADAPTS THE UNIT TO RECORDER OF AN ATTACK TEACHER OR A TACTICAL RANGE 1/3/44 B.S.L. MOD. ERM-18, JAN. 44 CAT.#41-25-71-18 (PHOTO)		
12/20/43	WE-341	R-1797E						
AUG. 44		REV 4						
CAIP 10297	*SEE BELOW	RE 66F136	CAHU 10302			RQ- 10308		
MAST BASE COVER FOR COVERING AN ANTENNA MAST BASE. WATERPROOF CANVAS OR FAIRPRENE. SAME AS TYPE -10184.			PARKING BRAKE. SAME AS -10301 EXCEPT HAS NO ELEVATOR OR STABILIZING JACKS.			RECORDER TEACHER. PROJECTS ENTIRE WIDTH AND 6 1/2" LENGTH OF RECORDING PAPER. HAS BUILT IN COOLING SYSTEM AND 500 WATT 115 VOLT PRE-FOCUSED BULB. LENS HAS 4" DIAMETER AND 18" FOCUS A PART OF TYPE -10310 RECORDER PROJECTOR ASSEMBLY.		
*EN28/5709-44/SHIPS(LL)								
12/22/43								
JAN. 44								
CAIP 10298	*SEE BELOW	RE 66F137	CAJF 10303	SK-1M		RQ- 10309	RQ-10310	
ANTENNA COVER FOR CARRYING SECTIONS OF A WHIP ANTENNA. WATERPROOF CANVAS OR FAIRPRENE. SAME AS TYPE -10183.			DRY AIR PUMP CONSISTS OF AN AUTOMOBILE TIRE PUMP AND A DEHYDRATOR USED FOR REMOVING MOISTURE FROM AIR EMITTED FROM THE DISCHARGE TUBE DEHYDRATING AGENT IS SILICA GEL, REPLACEABLE IN ONE LB. UNITS.			AUXILIARY PROJECTOR PROVIDES ILLUMINATION OF THE ANALYZER SECTION ONLY OF THE SCREEN. EMPLOYS 200 WATT PREFOCUSED LAMP AS A LIGHT SOURCE. A PART OF TYPE -10310 RECORDER PROJECTOR ASSEMBLY.		
*EN28/5709-44/SHIPS(LL)			1/2/44	876	CG:M-7471583	1/4/44		CANCELLED 4/29/44
12/22/43			DEC. 44		REV 1	AUG. 44		
JAN. 44								

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
RQ-10310	*SEE BELOW		10317	GENERAL USE RE 10F334		CJF 10324	GEN RADIO USE RE 10J336A	
RECORDER PROJECTOR ASSEMBLY INCLUDES ONE TYPE -10307 SCREEN AND ANALYZER ASSEMBLY ONE TYPE -10308 TRACE PROJECTOR AND A TABLE FOR MOUNTING THE PROJECTOR. THIS ASSEMBLY ENABLES SEVERAL BUSINESS PROJECT ORDER 3 11/44 11/16/43 1/4/44. AUG. 44			DIELECTRIC MOLD USED FOR SPLICING RG-19/U RF CABLE TOGETHER.	1/28/44 JAN. 44		BATTERY FILLER USED TO FILL WET BATTERY OF 2 7/16" X 2 3/4" DIMENSIONS (NAVY TYPE -19048 OR -19). PERFORMS SAME FUNCTION AS NAVY TYPE -10244.	2/22/44 AUG. 44	CJF-V-502679 ISSUE A
	RQ-10310		RQ-10318	GENERAL SONOR USE		CAFJ 10325	NXsr-36737	
STUDENTS TO OBSERVE RECORDER PAPER AND ANALYZER SIMULTANEOUSLY.			WINCH ASSEMBLY HOISTING MECHANISM FOR BATHYTHERMOGRAPH. LIGHTWEIGHT HIGH SPEED. USES A 1 1/2 HP MOTOR TO OPERATE FROM 440/220/3/60. MOTOR SPEED 1800 RPM.	(CTB) 2/3/44 FEB. 44		FOIL ASSEMBLY CONSISTS OF 720 1/4" STRIPS OF A SPECIFIC LENGTH UP TO 20" OF 0.00035 ALUMINUM FOIL LAMINATED BETWEEN 50 POUND BOND PAPER IN 6 STACKS OF 120 EACH HAVING A CROSS SECTION OF 3/4" X 1 5/8". THE 6 STACKS ARE WRAPPED IN 1 1/2 TURNS OF	2/22/44 MAR. 44	RE 13A386B
	CAKL 10311	SK-IM	RO-10319	GENERAL SONAR USE		CAFJ 10325 (143)		
DEHUMIDIFIER TRAILER 2 WHEEL TRAILER FOR TRANSPORTING TYPE -10306 DEHUMIDIFYING UNIT. TRAILER HAS OVERALL FRAME TO PROTECT DEHUMIDIFYING UNIT IN CASE OF ACCIDENT. HAS COMPARTMENT IN FRONT TO STORE SPARE PARTS AND TOOLS. 1/3/44 X-7895433 T-7663514 DEC. 44			WINCH ASSEMBLY HOISTING MECHANISM FOR BATHYTHERMOGRAPH. LIGHTWEIGHT HIGH SPEED. USES A 1 1/2 HP MOTOR TO OPERATE FROM 115 VOLTS DC. MOTOR SPEED 1800 RPM.	2/3/44 FEB. 44		CARDBOARD WHICH IS UNSEALED WITH OPEN ENDS. TYPE NO. TO INDICATE FOIL LENGTH BY 3 CODED NUMERALS IN PARENTHESIS TO NEAREST 1/8"; VIZ: LENGTH OF 18 1/2" OR 14 3/8". TYPE NO. IS CAFJ-10325(184), CAFJ-10325(143) RESPECTIVELY.		
	CW-10312	GEN RADIO USE	CFT-10320	DBB		CAFJ 10326 (1)	NXsr-36737	
FACE HARNESS ASSEMBLY INCLUDES STRAP, MICROPHONE HOLDER, CORD AND PLUG. FOR HOLDING NAVY TYPE CW-51066 LIP MICROPHONE. STRAP FASTENS ON HELMET OR HEADBAND BY SNAP ON BUTTONS SAME AS AN TYPE NX-108/UR. 1/4/44 D-173861 667982 MAR. 45			AZIMUTH INDICATOR & TRIPOD ASSEMBLY	2/7/44 FEB. 44		FOIL ASSEMBLY CONSISTS OF 6 STRIPS OF A SPECIFIED LENGTH UP TO 64" OF 0.00035 ALUMINUM FOIL MOUNTED ON 30 POUND BOND PAPER AND THEN GLUED TO 50 POUND KRAFT "SERPENTINE STREAMERS" WITH SPACE BETWEEN STRIPS. STREAMERS ARE WOUND ON 1 5/16" CORE AND	2/22/44 MAR. 44	RE 13A386B
	CAY 10313	SR	CFT-10320-A	DBB-1		CAFJ 10326 (1)		
INDICATOR CONSOLE CRADLE MOUNTED ON 8 LORD SHOCK MOUNTS AND CONTAINS TYPE -46ADJ INDICATOR CONSOLE. 1/12/44 7610671-G1 T-7611717 MAR. 45 SUB 2			AZIMUTH INDICATOR & TRIPOD ASSEMBLY: SAME AS -10320 EXCEPT MECHANICALLY IMPROVED AND HAS SINGLE MOUNTING PLATE. INTERCHANGEABLE WITH -10320.	11/3/44 DEC. 44	RF 2362-14	OTHER END IS ATTACHED TO 16" PAPER PARACHUTE. ENTIRE ASSEMBLY IS WRAPPED IN 1 1/2 TURNS OF CARDBOARD WHICH IS UNSEALED WITH OPEN ENDS. TYPE NO. IS TO INDICATE FOIL LENGTH BY 3 CODED NUMERALS IN PARENTHESIS TO NEAREST 1/8". VIZ: LENGTH 64 1/2" WOULD BE CAFJ-10326(644).		
	CAY 10314	YE	CAFJ-10321	*SEE BELOW	RE 13A885A	CW-10327	NXsr-43304	RE 9340A
CRADLE MOUNTED ON 4 LORD SHOCK MOUNTS. FITS BOTH TYPE -50AEB ROTATION CONTROL UNIT AND TYPE -55ADY PPI. 1/12/44 AUG. 44			FOIL ASSEMBLY CONSISTS OF ALUMINUM FOIL ROLL, 1 5/16" PLUS OR MINUS 1/32" WIDE, 0.00035"± 0, 00005" THICK, WITH 12 POUND TISSUE SOLIDLY GLUED ON EACH SIDE OF THE FOIL. EACH ROLL IS 1000 FT LONG.	2/7/44 FEB. 44	*GENERAL RADIO USE	GAS MASK ADAPTER BRACKET FOR MOUNTING CW-51066 MICROPHONE UNIT PLUS CORD AND PL-291 PLUG.	3/6/44 MAR. 45	D-173337 CH:ESO-666786 ISS 4
	CAJY 10315	TBX-6	CRP-10322	*SEE BELOW		CG-10328	TDY	
SILICA GEL AIR DRYER CONSISTS OF AN ALUMINUM CARTRIDGE FILLED WITH SILICA GEL WITH COLOR INDICATOR. MAY BE RECONDITIONED IN 300°F OVEN FOR THREE HOURS. 1/20/44 JAN. 44		P-7388401-1 REV 1	SPARK GAP SAME AS -10249 EXCEPT FOR DIFFERENCES IN PARTS REQUIRED TO ADAPT IT TO THE ALTERNATOR. ELECTRICALLY IT IS IDENTICAL.	2/12/44 FEB. 44	*S0-3.S0-9.S0-13 RX-1182	ALNICO CASTING. AGED AND ADJUSTED TO AN INTENSITY OF 1500±30 GAUSS AT CENTER OF 2.267 GAP.	3/8/44 MAR. 44	220-A-150 H-7471374, REV 0
	RA-10316	*SEE BELOW	CALM 10323	DAS-2		-10329	GEN. USE	RE 10F334
DEMAGNETIZER INPUT: 110/1/60. FOR USE IN DEMAGNETIZING THE DEFLECTION COIL CORES IN THE TYPE -55092 AUTOMATIC BEARING INDICATOR MOUNTS ON SIDE OF AUTOMATIC BEARING INDICATOR. *FOR USE WITH DAQ & DAK 1/25/44 NRL PROB #5575-RC JAN. 44			MOUNTING RACK MOUNTING RACK FOR NAVY TYPES CG-20288, CG-46244 AND CG-55147 (RECTIFIER POWER UNIT, RADIO RECEIVER AND INDICATOR UNIT). MAY BE USED AS A REPLACEMENT RACK FOR NAVY TYPE CG-46210.	2/15/44 MAR. 44		JACKET MOLD USED FOR SPLICING RG-19/U RF CABLE TOGETHER.	3/10/44 MAR. 44	

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CM- 10330	NXS-149		CM-10336			CWP- 10340	EF-7	
CABINET FAN SUPPLY: 110/1/6C. INDUCTION TYPE MOTOR, INPUT CURRENT OF MOTOR WHEN COLD NOT TO EXCEED 0.35 AMPS AT 115V, 60 CYCLES, AND MIN. SPEED SHALL BE 1550 RPM.			TERMINALS, CONVENIENCE OUTLET BUILT-IN ILLUMINATION FACILITIES.			CANVAS CASE: COVER FOR GAS ENGINE, SIMILAR TO-10020-A BUT IS OF LARGER SIZE.		
3/16/44 KS-5964. DEC. 44 LIST 03						5/6/44 (CCW)COV-6-1 JULY 44		
CM- 10331	UG		CANM-10337	QJB		CAFJ- 10341	() ()	RE15AB36B ADO #1
CABINET PLYWOOD CABINET, STEEL REINFORCED, APPROX 2 FT. HIGH, 2 FT. WIDE, 1 FT -5" FRONT TO BACK. HOUSES NAVY TYPES CM-20290, CM-23426, CM-28016, CM-50177, CM-51068. HAS REMOVABLE COVER.			OPERATORS CHAIR: CONSISTS OF AN ALUMINUM SEAT STRUCTURE, UPHOLSTERED IN IMITATION LEATHER. DESIGN- ED FOR ROTARY ADJUSTMENT AND MAY BE LOCK- ED IN 45° POSITIONS. TWO 24" LONG EXTEND- ED ALUMINUM TRACKS MOUNTED ON A STEEL BASE PLATE ARE PROVIDED FOR INSTALLATION 4/21/44 #250 ESX-658977 MAY 44 (CW)KS-9471 ISSUE 4			A PACKAGE CONSISTING OF TWO OR MORE UNIT OF CAFJ-10270-A(), CAFJ-10271(), CAFJ- 10325() AND CAFJ-10326(). COMBINATION TO BE DESIGNATED BY TWO OR MORE PARENTHESIS WITH FOIL ASSEMBLY LENGTH SHOWN SUCH AS 5/12/44 JULY 44		
3/17/44 MAR. 44								
CM- 10332	UH		CANM- 10337	QJB		CAFJ- 10341	(081) (060)	
CABINET PLYWOOD CABINET, STEEL REINFORCED, APPROX. 4 FT. HIGH, 2 FT. WIDE, 1 FT -5" FRONT TO BACK. HOUSES NAVY TYPES CM-23427 CM-51068, GROUND ROD, TOOLS, ETC. HAS REMOVABLE COVER.			FACILITY AND TO ALLOW AN ADJUSTMENT OF FRONT TO REAR.					
3/17/44 MAR. 44								
CCP 10333	KCV		CM- 10338	REA		CAFJ-10341A	() () GEN USE	RE14A836C
CABINET HOUSES NAVY TYPES CPH-20292 RECTIFIER POWER UNIT, CPH-46247 RADIO RECEIVER AND CPH-55148 PANORAMIC ADAPTOR, RACK TYPE WITH DQDR IN REAR, 28" HIGH, 21" WIDE, 15" DEEP.			TERMINAL PANEL: CONTAINS TERMINAL STRIPS FOR CONNECTING BAY AND INTERBAY CABLING.			FOIL ASSEMBLY - COMBINATION PACKAGE: A PACKAGE CONSISTING OF TWO OR MORE UNITS OF CAFJ-10270(),CAFJ-10271() COMBINATION TO BE DESIGNATED BY TWO OR MORE PARENTHESIS WITH FOIL ASSEMBLY LENGTH SHOWN SUCH AS (280)(017)(081) (060). 10/6/44 DEC. 44		
3/25/44 APR. 44			4/25/44 D169191 FEB. 45					
CRY- 10334	FOR USE WITH ATK		CGQ- 10339	TBX-8		CAHT -10342	GEN. USE	
ADAPTER MOUNTING PLATE: FOR ADAPTING CRY-59AA3 CONVERSION UNIT TO THE CRY-10168 MOUNTING BASE.			ACCESSORY BOX: FOR CARRYING TWO 45 VOLT BATTERIES, TWO 1.5 VOLT "A" BATTERIES, ONE 7.5 VOLT "C" BATTERY, GENERATOR CABLES, HEADPHONES, MICROPHONES KEY AND MOBILE SPARE TUBES. INCLUDES PLUG AND BATTERY CABLE. SAME AS -10026-A EXCEPT HAS ADDITIONAL COMPART- 4/27/44 MAY 44			MOBILE ELECTRONIC MAIN- TEHANCE SHOP: CONSISTS OF 2 1/2 TON GENERAL MOTOR 6 X 6 TRUCK WITH SPECIAL STEEL, WELDED BODY WHICH CONTAINS A 10" LATHE, A 300 AMP ELECTRIC WELDER, GAS WELDING EQUIP- MENT, A 30 CU. FT. AIR COMPRESSOR, AND 5/16/44 WEL JULY 44		
4/11/44 CRY:T-4011 MAY 44								
CLP- 10335	FOR USE WITH RB3/R3C		CGQ- 10339	TBX-8		CAHT- 10342	GEN. USE	
PANORAMIC ADAPTOR KIT: FOR ADAPTING ANY RB3 OR R3C RECEIVER FOR USE WITH A PANORAMIC ADAPTOR, CONSISTS OF A 6AB7 CATHODE FOLLOWER TUBE, A FILTER TOGGLE SWITCH, I.F. INTERCONNECTING CABLE AND ASSOCIATED RESISTORS AND CAP- 4/17/44 (CR)X-891304-501 (CR)M-427569 MAY 44 SUB 3			MENTS AND USES DIFFERENT BATTERY CABLE.			MISCELLANEOUS TEST EQUIPMENT AND TOOLS.		
ACITORS NX8r-43377		CLP- 10335	CG- 10339-A	TBX-7		CAMU- 10343	MK 20 MOD 1	
			ACCESSORY BOX FOR CARRYING TWO 45 VOLT BATTERY, TWO 1.5 VOLT "A" BATTERIES, ONE 7.5 VOLT "C" BATTERY, GENERATOR CABLES, HEADPHONES, MICROPHONE, KEY MOBILE SPARE TUBES, ANTENNA LEAD AND BATTERY CABLE. SAME AS -10339 EXCEPT "A" BATTERIES ARE 11/10/44 ML7663782G1 T-7663782 MAR. 45 REV 1			TRAILER: 4 WHEEL, CANVAS TOP TRAILER FOR TRANS- PORTING AND OPERATING THE MARK 20 MOD 1 EQUIPMENT. HAS SIDE SEATS AND LOCKER.		
						5/22/44 (CW)B-412700 CW:30-417549 DEC. 44 ISSUE 2		
CM- 10336	QJB		CG- 10339-A	TBX-7		CAOC-10344	DAY-2	
CONSOLE RACK: RACK WHICH HOUSES THE UNITS CONTAINED IN THE TYPE -23450 CONTROL CONSOLE. IN- CLUDES SHOCK AND VIBRATION MOUNTINGS, BAND TELEGRAPH KEY,MASTER GAIN CONTROL, POWER TRANSFORMER, RECTIFIER UNIT TRAIN- ING AND PUSHBUTTON CONTROLS, LOUSPEAKER 4/20/44 D-163453 ESX-658977 MAY 44 ISSUE 4			REVERSED TO PREVENT SHORTING THE NEGA- TIVE TERMINAL TO THE METAL CASE.					
						5/24/44 RC-2A (CCI)13-005 (CCI)164-C-502 JULY 44 REV A		

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION		
CAOD-10345		GEN. RADAR USE VECTOR COMPUTER; MECHANICAL DEVICE FOR DETERMINING INTER- CEPTIONS OF ENEMY AND FRIENDLY AIRCRAFT FROM DATA OBTAINED FROM VARIOUS RADAR EQUIPMENTS, TAKING INTO ACCOUNT WIND VELOCITY. NXSS-47393 5/25/44 JULY 44	CAOD- 10352		GEN RADAR RE10A389A USE SPlicing KIT: FOR SPlicing RG-8/U, RG-11/U AND RG-19/U CABLE. CONSISTS OF MOLDS, INJECTION GUNS, CONNECTORS, SPlicing MATERIALS AND MIS- CELLANEOUS TOOLS. 5/30/44 JULY 44	10358		SEE BELOW LOWER RADIO CABINET: USED IN LVT-2, LVT-4, LVT(A)-1, LVT(A)-4 AMPHIBIAN TRACTORS TO ENCLOSE RADIO IN CAB. STEEL, WATERPROOF. *FOOD MACHINERY CORP, LOS ANGELES, CALIF. (CAPE-CAFF) *FOR USE WITH TCS & SCR-508.528 7/11/44 *21X3044D SEPT. 44 CHANGE 0		
CAOK- 10346		MAE-1 ANTENNA SUPPORT: CONSISTS OF FOUR TELESCOPING SECTIONS OF BRASS TUBING PROVIDED WITH STOPS TO LOCK SECTIONS IN EXTENDED POSITION. HAS FOOT AT ONE END FOR ASSEMBLY TO -43064 AND SCREW KNOB AT OTHER END FOR ASSEMBLY TO -66121. 5/26/44 L-21384-1 (CKV)L-21414 JULY 44 REV 0	CAOD-10353		GEN. RADAR RE10A389A USE SPlicing KIT: FOR SPlicing RG-8/U AND RG-11/U CABLE. CONSISTS OF MOLDS, INJECTION GUNS, CON- NECTORS, SPlicing MATERIALS AND MISCELL- LANEOUS TOOLS. 5/30/44 JULY 44	-10359		SEE BELOW UPPER RADIO CABINET: USED IN LVT-2, LVT-4, LVT(A)-1, LVT(A)-4 AMPHIBIAN TRACTORS TO ENCLOSE RADIO IN CAB AND CARGO SPACE. STEEL, WATERPROOF. *FOR USE WITH TCS, SCR-508.528 *FOOD MACHINERY CORP, LOS ANGELES, CALIF. (CAPE-CAFF) *20X3052D 7/11/44 SEPT. 44 CHANGE 0		
CAOM- 10347		MAE-1 CARRYING CASE: CANVAS BAG FOR CARRYING MAJOR UNITS OF MAE-1. HAS ZIPPERED OPENINGS FRONT AND TOP. HAS VENT ON SIDE FOR BATTERY VENT- ILATION. BATTERY VENT AND FRONT OPENING HAVE RAIN SPLASH PROTECTORS. FRONT OPEN- ING PERMITS OPERATION WITHOUT REMOVING 5/26/44 W-40527-1 (CKV)L-21413 JULY 44 REV 0	CASH- 10353-S		GEN RADAR USE RE10A389A SPlicing KIT FOR SPlicing RG-8/U & RG-11/U CABLE. CONSISTS OF TYPE -10354 DIELECTRIC MOLD, TYPE -10355 JACKET MOLD, TYPE -10237 IN- JECTION GUN, CONNECTORS, SPlicing MAT- RIALS & MISCELLANEOUS TOOLS. SAME AS -10353 EXCEPT FOR OMISSION OF RG-11/U 5/14/45 NXs-95485 MAR. 45	10360		SEE BELOW RE 10F413A RADIO CABINET FRAME: USED TO SUPPORT NAVY TYPE -10359 WHEN USED IN CARGO. SPACE OF LVT-2, LVT-4, LVT(A)-1, LVT(A)-4 AMPHIBIAN TRACTORS. *FOR USE WITH TCS & SCR-508 AND 528 7/11/44 SEPT. 44		
		CAOM- 10347 EQUIPMENT FROM CASE. MAY BE CARRIED BY MEANS OF SHOULDER STRAPS OR HAND STRAP ON TOP.			CASH-10353-S INNER CONDUCTOR JOINER.			CUZ- 10361		OAH-2 SHIPPING CHEST: PLYWOOD CHEST, FIBER COVERED AND METAL REINFORCED FOR TRANSPORTING TYPE -10362 ACCESSORY BOX, BATTERIES AND TYPE -35058 OSCILLATOR-AMPLIFIER UNIT. 7/12/44 SEPT. 44
CAOP- 10348		RBS,RB3,R3C SERIES RECTIFIER MOUNTING SHELF: SHELF FOR RACK MOUNTING ON STANDARD 17" RACK. FOR RACK MOUNTING OF MODEL RBA, RBB OR R3C SERIES RECTIFIER POWER UNITS. 5/28/44 C-3033-3 JULY 44 REV C	10354		GEN. RADAR RE10F329 USE DIELECTRIC MOLD: FOR PREPARING INNER CONDUCTOR OF POLY- ETHYLENE (OR EQUIVALENT) DIELECTRIC USED IN SPlicing AN TYPE RC-8/U AND RC-11/U RF CABLE. 6/8/44 AUG. 44	CUZ- 10362		OAH-2 ACCESSORY BOX: METAL BOX WITH COMPARTMENTS FOR BATTERIES EQUIPMENT SPARE PARTS, CABLES, KEY AS- SEMBLIES, HEADSET ASSEMBLIES AND DIS- TRIBUTION UNIT. 7/12/44 SEPT. 44		
CAOP- 10349		RBA SERIES CABINET: RECEIVER CABINET FOR RACK MOUNTING RADIO RECEIVERS OF MODEL RBA SERIES EQUIPMENT ON STANDARD 17" RACK. 5/28/44 C-3033-2 JULY 44 REV 0	10355		GEN. RADAR RE10F329 USE JACKET MOLD: FOR PREPARING OUTER JACKET OF POLYVINYL CHLORIDE (OR EQUIVALENT) USED IN SPlicing AN TYPE RG-8/U AND RG-11/U RF CABLES. 6/8/44 AUG. 44	CARA 10363		MK 20 MOD 1 VENTILATING UNIT: CONSISTS OF 700 CFM FAN, DRIVEN BY A 1/20 HP, D-C SHUNT WOUND, ENCLOSED, CON- TINUOUS DUTY MOTOR, SINGLE SEAL TYPE BALL BEARINGS, 22-28V DC, IN AMBIENT TEMPERATURE OF 0°C TO 55°C, IN RELATIVE *KS-5807 LIST 03, ISS 2 APP 1.2,3 8/9/44 *SEE ABOVE CM:KS-5807 FIG 1 SEPT. 44 ISSUE 6		
CAOP-10350		R3B,R3C,SERIES CABINET: RECEIVER CABINET FOR RACK MOUNTING RADIO RECEIVERS OF MODEL R3B OR R3C SERIES EQUIPMENT ON STANDARD 17" RACK. 5/28/44 C-3033-1 JULY 44 REV E	CAHZ-10356		SO-12X12N ANTENNA MOUNTING BASE: INCLUDES ANTENNA SUPPORT WHICH CAN BE RAISED FOR OPERATION AND LOWERED WHEN TRAILER IS BEING MOVED. 6/9/44 CRP:RX-1061 CRP:M-36M-WI AUG. 44 SUB A			CARA- 10363 HUMIDITIES UP TO 95% AT 30°C.		
CAOD-10351		GEN. RADAR RE10A389A USE SPlicing KIT: SPlicing KIT FOR SPlicing RG-8/U, RG-11/U, RG-17/U AND RG-19/U CABLE. CON- SISTS OF MOLDS, INJECTION GUNS, CONNECT- ORS, SPlicing MATERIALS AND MISCELLANE- OUS TOOLS. 5/30/44 JULY 44	CAPD- 10357		SEE BELOW CAB RADIO CABINET: USED IN MODEL LVT-3, MARK 3 LANDING VEHICLE, TRACKED (UNARMORED). STEEL CABINET, WATERPROOF. *FOR USE WITH TCS & SCR-508.528 7/11/44 BUSHIPS DWG, SEPT. 44 LVF-3448588 ALT	CAY- 10364		RCG/RCR MOBILE SPARE PARTS BOX: CONSISTS OF WATERTIGHT BOX AND A GAS- KETED COVER. SAME AS TYPE -10095 MOBILE SPARE PARTS BOX, ONLY WITHOUT MOUNTING BRACKET FOR SPARE DYNAMOTOR. SEMI-PORT- ABLE. 8/10/44 CAY:T-7613330 OCT. 44 SUB 1		

3.10-20

Class 10—Miscellaneous

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CRY 10365 JT	8/10/44 OCT. 44	HYDROPHONE BAFFLE: STAINLESS STEEL WITH A NEOPRENE AND BUNA RUBBER BLANKET COVER. HAS PROVISIONS FOR MOUNTING TYPE -51074 HYDROPHONE AND IS MOUNTED ON TYPE -10366 SOUND ABSORBING COUPLER UNIT.	CFN- 10372 BN-2	8/16/44 MAR. 45	BN-2 ANTENNA CARRYING CASE: WATERPROOF, PLYWOOD CASE FOR CARRYING TYPE -66AFJ ANTENNA ASSEMBLY, A CABLE ASSEMBLY, A MAST BASE, AN ANTENNA PIPE ADAPTER, A GUY WIRE RING, 4 GUY WIRE ASSEMBLIES AND 4 EARTH ANCHORS.	CPD 10378	8/16/44 MAR. 45	CPD 10378 4.4 WATTS. SAME AS CPD-10137 EXCEPT FOR PHYSICAL DIMENSIONS.
CRY 10366 JT	8/10/44 OCT. 44	SOUND ABSORBING COUPLER UNIT: CONSISTS OF 1 STAINLESS STEEL AND 1 BRONZE DISC, SEPARATED BY 1 INCH OF RUBBER WHICH IS BONDED TO EACH DISC. ABSORBS SOUND VIBRATIONS AND COUPLER TYPE -51075 HYDROPHONE ASSEMBLY TO TRAINING SHAFT.	CFN- 10373 BN-2	8/16/44 OCT. 44	BN-2 MAST CARRYING CASE: WATERPROOF, FIREPROOF CANVAS CASE FOR CARRYING FOUR ANTENNA MAST SECTIONS OF THE TYPE -10370 ANTENNA MAST ASSEMBLY.	CAHU- 10379 MK 33 MOD 0	8/16/44 OCT. 44	CAHU- 10379 MK 33 MOD 0 EQUIPMENT TRAILER: ALL STEEL, DUAL TANDEM REAR WHEELS WITH FRONT SINGLE DUALS AND 5TH WHEEL FOR STEERING, INSULATED SIDE WALLS AND ROOF. INCLUDES CABLE-LIFT ELEVATOR IN ROOF. INTERNAL PROVISIONS FOR HEATING VENTILATING AND AIR-CONDITIONING. SAME AS 8/20/44 K-7102611 CAHU:10759-24 OCT. 44
CFN 10367 BN-2	8/11/44 FEB. 45	CABINET: CABINET FOR HOUSING BN-2 MODULATOR AND IF TO VIDEO CONVERTER, RF TO IF CONVERTER, TRANSMITTER RF OSCILLATOR. SHOCK MOUNTED AND INCLUDES A FOLDING TYPE FRONT COVER. SAME AS -10235 EXCEPT (1) 2 KNOCKOUT PLUGS REMOVED AND ONE HOLE	CFN- 10374 BN-2	8/16/44 FEB. 45	BN-2 EQUIPMENT SPARE PARTS BOX: WATERPROOF, PLYWOOD, CASE FOR CARRYING ONE SET OF BN SPARES LESS THE 400 CYCLES BLOWER MOTOR AND ONE SET OF BN-2 SPARES.	CAHU- 10379	8/11/44 FEB. 45	CAHU- 10379 -10301 EXCEPT INTERNAL ARRANGEMENT IS DIFFERENT.
CFN- 10367	8/11/44 FEB. 45	ADDED TO TOP OF CASE. (2) FOUR HOLES ADDED IN LOWER DOOR.	CFN- 10374	8/16/44 FEB. 45	ADDED TO TOP OF CASE. (2) FOUR HOLES ADDED IN LOWER DOOR.	CAHU- 10379	8/11/44 FEB. 45	ADDED TO TOP OF CASE. (2) FOUR HOLES ADDED IN LOWER DOOR.
CAY- 10368 RCQ,RCR	8/11/44 OCT. 44	TRANSPORTATION CASE: WATER TIGHT CASE MADE OF ALUMINUM. INCLUDES GASKETED REMOVABLE COVER GIVING ACCESS TO RECEIVER CONTROLS. USED WITH NAVY TYPE -46251 AND -46252 RADIO RECEIVERS.	CW- 10376 ST	8/17/44 OCT. 44	MOUNTING FRAME (MK1 MOD 0) USED FOR MOUNTING NAVY TYPE CW-43ACU RADAR TRANSMITTER RECEIVER OR CW-43ACQ RADAR TRANSMITTER RECEIVER.	CW- 10380 REA	8/17/44 OCT. 44	CW- 10380 REA TERMINAL PANEL: CONTAINS TERMINAL STRIPS FOR CONNECTING BAY AND INTERBAY CABLING.
CZC- 10369 RDO	8/15/44 DEC. 44	PRESELECTOR FRAME: CONSISTS OF ALUMINUM FRAME WITH FRONT PANEL ATTACHED ALL CONNECTIONS TO PRESELECTOR TUNER MADE AUTOMATICALLY WHEN TUNER UNITS ARE INSERTED INTO FRAME ON GUIDE RAILS. ANTENNA INPUT IMPEDANCE IS 60 OHMS.	CW- 10377 ST	8/17/44 OCT. 44	BLOWER MOTOR ASSEMBLY: CONSISTS OF TYPE -211213 AC MOTOR, A SIROCCO #000 BLOWER WHEEL WITH 24 METAL BLADES FOR CLOCKWISE ROTATION DESIGNED FOR OPERATION BETWEEN 3000 RPM AND 8000 RPM AND WITH A DISCHARGE RATING OF 10 TO 35 CFM, AND A L-R MFG CO. #2 PHENOLIC	CW- 10380	8/15/44 DEC. 44	CW- 10380 TERMINAL PANEL: CONTAINS TERMINAL STRIPS FOR CONNECTING BAY AND INTERBAY CABLING.
CFN- 10370 BN-2	8/16/44 FEB. 45	ANTENNA MAST ASSEMBLY: CONSISTS OF A MAST BASE, AN ANTENNA PIPE ADAPTER, A GUY WIRE RING, 4 GUY WIRE ASSEMBLIES, 4 EARTH ANCHORS AND 4 SECTIONS OF 2 1/2" TUBULAR STEEL EACH 5 FT. 4 INCHES LONG.	CFN- 10377	8/16/44 FEB. 45	BLOWER HOUSING DESIGNED FOR CLOCKWISE ROTATION AND TEMPERATURES OF 110°C CONTINUOUSLY.	CRV- 10382	8/16/44 FEB. 45	CRV- 10382 LININGS.
CFN- 10371 BN-2	8/16/44 MAR. 45	EQUIPMENT CARRYING CASE: WATERPROOF PLYWOOD CASE, WITH GASKETED FRONT COVER, AND 2 HANDLES FOR TRANSPORTING THE BN-2 EQUIPMENT.	CPD 10378 SR-2	8/16/44 MAR. 45	DEHYDRATING UNIT CONSISTS OF A CORNELIUS 1800 CU IN/MIN. ROTARY COMPRESSOR AND SILICA GEL DEHYDRATOR. INITIAL DEW POINT, LESS THAN -60°F. AFTER 3 HOURS OPERATION, DEW POINT NOT LESS THAN -12°F. AUTOMATIC OPERATION. INPUT: 115/1/60, 4.5 AMPS.	CTF 10383 YN	8/16/44 MAR. 45	CTF 10383 YN ANTENNA MAST USED WITH TYPE CTF -52348 RADIO TRANSMITTER FOR SEA OPERATION. 6 FT. LONG. SUPPORTS ANTENNA MECHANICALLY & SERVES AS 50-OHM COAXIAL TRANSMISSION LINE. ELECTRICAL LENGTH OF MAST IS 3 HALF-WAVE LENGTHS AT 246 MC.

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CAFJ- 10384 GEN. USE FOIL ASSEMBLY CONSISTS OF 3000 ROTARY CUT STRIPS EACH CRIMPED PARALLEL TO THE LONG DIMENSIONS AS FOLLOWS: (A) 1500 UNANNEALED ±150 STRIPS OF .0008" ± .00008" THICK HARD ALUMINUM FOIL BACKED WITH 15 LB. ±1 1/2 LB. TISSUE PAPER. BACKING SHALL BE FIRM-10/5/44 F OCT. 44	RE13A836C		CW-10387-A MK 20 MOD 1 BLOWER MOTOR ASSEMBLY CONSISTS OF TYPE -211346 AC MOTOR, A SIROCCO #000 BLOWER ROTOR WITH 24 BLADES FOR CLOCKWISE ROTATION. DESIGNED FOR OPERATION BETWEEN 3000 RPM & 8000 RPM. WITH DISCHARGE RATING OF 10-35 CFM AND A L-R MFG. CO. #2 PHENOLIC BLOWER HOUSING 11/9/44 DEC. 44			CW-10387-A MOUNTS.		CW-10390
LY GLUED TO ONE SIDE OF FAIL. STRIPS SHALL BE 12"±0.1" LONG AND .080"±.01 WIDE. (B) 1500±150 STRIPS OF EMBOSSED BARE HARD UNANNEALED ALUMINUM FOIL .0008"±.00008 THICK. THE 3000 STRIPS SHALL BE ASSEMBLED WITHIN A RECTANGULAR PACKAGE 1/2" X 3 1/2" X 12" ±1/8" ON ALL DIMENSIONS OF 30 TO 40 POUND CHIPBOARD.		CAFJ- 10384	DESIGNED FOR CLOCKWISE ROTATION AND TEMPERATURES UP TO 110°C. CONTINUOUSLY. SAME AS TYPE -10387 EXCEPT FOR MOTOR.		CW-10387-A	CJF- 10391 TDM HOUSE AND SHELTER DIMENSIONS OF HOUSE ARE APPROX. 7' X 7' X 7'. INSTRUMENT SHELTER IS MOUNTED ON TOP OF HOUSE. OVERALL HEIGHT OF HOUSE AND SHELTER IS APPROXIMATELY 16 FT. HOUSE READILY ASSEMBLED AND DISASSEMBLED. SAME AS CJF-10128 EXCEPT THAT 9/27/44 AS-39197 X-S-47036 MAR. 45		CJF- 10391
CTF- 10385 FOR USE WITH YN ANCHOR LINE SUPPORT BUOY CONSISTS OF STEEL DRUM WITH A TO LB STABILIZER FASTENED TO IT BY STANDARD 1/2 INCH PIPE COUPLING. A SWIVEL IS ATTACHED TO STABILIZER WEIGHT FOR CONNECTION TO THE ANCHOR LINE. USED ONLY WHERE WATER DEPTH IS GREATER THAN 120 9/8/44 24098-N 24098-N MAR. 45		CTF- 10385	CW-10388 MK 20. MOD 1 BLOWER MOTOR ASSEMBLY CONSISTS OF TYPE -211323 AC MOTOR, A SIROCCO #000 BLOWER ROTOR WITH 24 BLADES FOR COUNTER CLOCKWISE ROTATION, DESIGNED FOR OPERATION BETWEEN 3000 RPM AND 8000 RPM. WITH DISCHARGE RATING OF 10-35 CFM. AND A L-R MFG. CO. #2 PHENOLIC 9/13/44 KS5992, ISS 2 OCT. 44 LISTS 01, 21		CW-10388	CJF- 10391 INSIDE OF WALLS AND CEILING ARE COMPOSED OF ONE LAYER OF 1/4" PLYWOOD AND ONE LAYER OF 1/2" CELOTEX. INSTEAD OF ONE LAYER OF 3/4" CELOTEX. FLOOR IS DRILLED FOR EIGHT INSTEAD OF NINE. HOLD-DOWN BOLTS. BOLT AT THE CENTER OF THE FLOOR HAS BEEN OMITTED.		CJF- 10391
FEET AND WITH TYPE CTF-52348 RADIO TRANSMITTER FOR DEEP SEA OPERATION.		CTF- 10385	CW-10388 BLOWER HOUSING DESIGNED FOR COUNTER CLOCKWISE ROTATION AND TEMPERATURES UP TO 110°C CONTINUOUSLY. SAME AS -10387 EXCEPT FOR ROTATION.		CW-10388	CAOT-10392 GEN. RADIO USE WEATHERPROOF HOUSING A WEATHER PROOF HOUSING APPROX. 14" X 14" X 20" WITH A HINGED DOOR. DOOR HAS SUITABLE DOGS AND GASKETS TO ENSURE WEATHERPROOF CLOSING. HAS FACILITIES FOR MFG ON FRAMEWORK OF 2 X 4'S. 9/30/44 229-5 OCT. 44 DATED 9-30-44		CJF- 10391
CTF- 10386 YN STABILIZER CONSISTS OF A 25 LB. LEAD WEIGHT FASTENED TO A ROD ATTACHED TO BOTTOM OF DRUM TO STABILIZE TYPE CTF-52348 RADIO TRANSMITTER FOR SEA OPERATION. IS REMOVABLE FROM ROD BY A 3/4" PIPE THREAD. ROD IS STANDARD 3/4" GALVANIZED PIPE, 9/8/44 24097-N 24097-N MAR. 45		CTF- 10386	CW-10388-A *SEE BELOW BLOWER MOTOR ASSEMBLY CONSISTS OF TYPE -211346 AC MOTOR, A SIROCCO #000 BLOWER ROTOR WITH 24 BLADES FOR COUNTER-CLOCKWISE ROTATION. DESIGNED FOR OPERATION BETWEEN 3000 RPM & 8000 RPM. WITH DISCHARGE RATING OF 10-35 CFM. * MK 20 MOD 1 AND AN/TPS-1B 11/9/44 DEC. 44		CW-10388-A	CJF- 10392 HAND GENERATOR CARRYING CASE; FOR CARRYING TYPE -21263-B HAND GENERATOR. SIMILAR TO -10028-A EXCEPT FOR SUBSTITUTION OF BUCKLE FASTENERS FOR ZIPPER FASTENERS AND ADDITION OF RUBBER SHOULDER PADDING. 10/5/44 (CG)P-766410F MAR. 45 REV 0		CJF- 10392
EITHER 4 FEET OF 6 FEET IN LENGTH.		CTF- 10386	CW-10388-A AND A L-R MFG. CO. #2 PHENOLIC BLOWER HOUSING DESIGNED FOR COUNTER-CLOCKWISE ROTATION AND TEMPERATURES UP TO 110°C CONTINUOUSLY. SAME AS -10388 EXCEPT FOR MOTOR.		CW-10388-A	CWP- 10393 TBX-7 CARRYING CASE FOR CARRYING EITHER TRANSMITTER-RECEIVER OR ACCESSORY BOX. SIMILAR TO -10027-A EXCEPT FOR LOCATION OF STRAPS AND SUBSTITUTION OF BUCKLE FASTENERS FOR ZIPPER FASTENERS. MADE OF CANVAS. RUBBER SHOULDER PADS HAVE BEEN ADDED. 10/5/44 CG-T-7664100 OCT. 44 REV 0		CWP- 10393
CW-10387 MK 20. MOD 1 BLOWER MOTOR ASSEMBLY CONSISTS OF TYPE -211323 AC MOTOR, A SIROCCO #000 BLOWER ROTOR WITH 24 BLADES FOR CLOCKWISE ROTATION. DESIGNED FOR OPERATION BETWEEN 3000 RPM AND 8000 RPM. WITH DISCHARGE RATING OF 10-35 CFM. AND A L-R MFG. CO. #2 PHENOLIC BLOWER HOUSING 9/13/44 KS5992, ISS 2 OCT. 44 LISTS 02, 22		CW-10387	CW-10389 FOR USE WITH FSA MOBILE CABINET FOR USE WITH TYPE CW-35060 FREQUENCY SHIFT KEYS FOR LAND OPERATION. MOUNTED ON CASTERS. HAS A TOP NOT REMOVABLE AND CONSTRUCTED AS INTEGRAL PART OF CABINET. COVERED WITH BROWN MASONITE. EQUIPPED WITH SLIDE BARS FOR SERVICING KEYS. 9/18/44 X-665888 B-409872 FEB. 45 LIST 1 R3		CW-10389	CWP- 10394 TBX-7 HAND GENERATOR CARRYING CASE; FOR CARRYING TYPE -21263-B HAND GENERATOR. SIMILAR TO -10028-A EXCEPT FOR SUBSTITUTION OF BUCKLE FASTENERS FOR ZIPPER FASTENERS AND ADDITION OF RUBBER SHOULDER PADDING. 10/5/44 (CG)P-766410F MAR. 45 REV 0		CWP- 10394
ING DESIGNED FOR CLOCKWISE ROTATION AND TEMPERATURES UP TO 110°C. CONTINUOUSLY. SAME AS TYPE -10388 EXCEPT FOR ROTATION.		CW-10387	CW-10390 FOR USE WITH FSA SHOCK-RESISTING CABINET FOR USE WITH TYPE CW-35060 FREQUENCY SHIFT KEYS FOR SHIPBOARD OPERATION. HAS CUP TYPE RUBBER SHOCK MOUNTS. HAS REMOVABLE DUST COVER. FIXED FRAMEWORK ATTACHED TO DECK, & FLOATING FRAMEWORK ATTACHED TO FIXED FRAMEWORK VIA RUBBER 9/18/44 X-665888 B-409873 FEB. 45 LIST 1 ISS 2		CW-10390	CWP- 10395 TBX-7 ANTENNA CARRYING CASE CANVAS CASE FOR CARRYING TYPE -66133 ANTENNA ASSEMBLY. SIMILAR TO -10029-A EXCEPT HAS BEEN SPLIT UP TO REDUCE OVERALL LENGTH AND SUBSTITUTION OF BUCKLE FASTENERS FOR ZIPPER FASTENERS AND ADDITION OF RUBBER SHOULDER PADDING. 10/5/44 CG-T-7664102 OCT. 44 REV.0		CWP- 10395

Class 10—Miscellaneous

3.10-23

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CIK-10414	MK 20 MOD 1		RM-10420	FSC		RM-10426	GEN USE	RM79F174
A.C. BUZZER: 115 VOLTS, 60 CYCLES, RATED 0.1 AMPS. 2 WASHET COILS, EACH WITH 3500 TURNS #33 EN. WIRE, 112 OHMS RES. VIBRATING ARMATURE, SCREW ADJUSTED.			CABINET: CABINET FOR MOUNTING TYPE RM-20345 RECTIFIER POWER UNIT, TYPE RM-50212 MIXER UNIT AND TYPE RM-53215 FILTER UNIT.			PUMPING UNIT CONSISTS OF CABINET CONTAINING A VACUUM PUMP, A 5 GALLON VACUUM BOTTLE, A 1 GAL- LON OIL TRAP BOTTLE, A VACUUM GAUGE AND 4 VALVES.		
11/16/44	CS-270	SK-6525-S	11/27/44		RM67F102	12/6/44		
NOV. 44		ISSUE 2	DEC. 44			JAN. 45		
CTZ-10415	*SEE BELOW		CAFF-10421	OBC				
PREFABRICATED SHELTER: A PREFABRICATED SHELTER TO HOUSE THE MODEL DAB.			BLOWER MOTOR ASSEMBLY: CONSISTS OF TYPE CAFF-211370 BLOWER MOTOR DIRECTLY CONNECTED TO BLOWER WHEEL MOUNTED IN PRESSED STEEL BLOWER HOUSING. OUTPUT OF BLOWER IS FREE AIR, WITH MOTOR HOT AND 115 VOLTS, 60 CYCLES *3566 CW:KS-5964L-03 ISS. 2 APP. 1 11/27/44 *SEE ABOVE CW:KS-5964 DEC. 44 FIG. 1 ISS 5			-10427 ACCESSORY FOR PO RANGE CALIPERS CONSISTS OF A 6" DIVIDER WITH ARC SCALE GRADUATED IN NAUTICAL MILES FROM 0 TO 110. USED FOR MEASURING TARGET RANGES REFERRED TO THE SHIP ON THE MAIN PPI WHEN USED ON THE 80 MILE SWEEP.		
RHXZ-79967						12/8/44		
*FOR USE WITH DAB 11/20/44 NOV. 44						JAN. 45		
RQ-10416	JP-1, JP-2, JP-3		CAFF-10421					
HYDROPHONE BAFFLE: CAST BRONZE FAIRING COVERED WITH A SOUND-ABSORBENT RUBBER BLANKET TO EFFECT A GOOD FRONT-TO-BACK RESPONSE.			APPLIED TO MOTOR WILL PRODUCE APPROXIM- ATELY 50 CUBIC FEET PER MINUTE.			-10428 ACCESSORY FOR PO RANGE CALIPERS CONSISTS OF A 6" DIVIDER WITH ARC SCALE GRADUATED IN NAUTICAL MILES FROM 0 TO 240. USED FOR MEASURING TARGET RANGES REFERRED TO THE SHIP ON THE MAIN PPI WHEN USED ON THE 200 MILE SWEEP.		
11/20/44						12/8/44		
DEC. 44						JAN. 45		
RQ-10417	JP-1, JP-2, JP-3		CARA-10422	MK 20 MOD 1		CAEV-10429	PO	
SOUND ABSORBING COUPLER UNIT: COUPLER ACTS AS VIBRATION ISOLA- TION MOUNT BETWEEN HYDROPHONE TRAINING SHAFT AND TYPE -10416 HYDROPHONE BAFFLE. INCLUDES BOTTOM PLATE FOR BOLTING TO FLANGE AT TOP OF TRAINING SHAFT A RUBBER SECTION BONDED TO BOTTOM PLATE AND TOP 11/20/44 DEC. 44			BLOWER MOTOR ASSEMBLY: CONSISTS OF A CDA-211373 AC MOTOR CON- NECTED TO A FAN MOUNTED IN A COMMON HOUSING. WITH MOTOR HOT & 115 VOLTS, 400 CYCLES APPLIED. FAN HAS A MIN OUTPUT OF 15 CFM IN FREE AIR. SAME AS -10419 EX- CEPT FOR MODIFICATIONS NECESSARY TO AC- 11/28/44 KS-15105 LIST 05 CW:KS-15105-05 DEC. 44 ISS. 1 ISS. 1			ANTENNA MOUNT CONSISTS OF A SUPPORT FLANGE-TERMINAL TUBE FOR CABLE AND COMPRESSION FITTINGS. FOR WEATHER PROOFING. USED TO SECURE RE- LAY ANTENNA AT 86/ART-22.		
						12/8/44		
						JAN. 45		
RQ-10417			CARA-10422					
PLATE PROVIDED WITH POSTS TO WHICH BAFFLE IS BOLTED. SAFETY SCREWS ARE IN- CLUDDED. SIMILAR TO -10366.			COMODATE THE NEW MOTOR.			-10430 GEN RADAR USE 16N-8(RE) ALUMINUM WIRE MESH CONSISTS OF #2 ALUMINUM HARDWARE CLOTH COATED WITH A PLASTIC COVER. SAME AS -10431 EXCEPT FOR SIZE OF WIRE MESH OPENINGS.		
						12/18/44		
						MAR. 45		
CACU-10418	GEN. USE		GCH-10423	X-0CP				
LOCKING KNOB: CONSISTS OF A 3/8-32, 1" OD KNURLED NUT, A KNOB WITH OIL CAN TYPE CLAMPING FINGER, LOCK WASHER, AND PLAT WASHER. USED FOR LOCKING ANY 1/4" SHAFT.			CARRYING CASE: METAL CARRYING CASE WITH NECESSARY HAN- DLES AND LATCHES AND PROVISIONS FOR SW- ING TYPE -50213 OSCILLATOR-AMPLIFIER UNIT AND TYPE -51087 HYDROPHONE ASSEMBLY			10431 GEN RADAR USE 16N-8(RE) ALUMINUM WIRE MESH CONSISTS OF 3/8" SQUARE ALUMINUM WIRE MESH COATED WITH A PLASTIC COVER. 34 1/2" WIDE. SAME AS -10430 EXCEPT FOR SIZE OF WIRE MESH OPENINGS.		
11/21/44			12/1/44			12/18/44		
DEC. 44			DEC. 44			JAN. 45		
CARA-10419	*SEE BELOW		CASH-10424	GEN RADAR USE	RE10A389A	CAOR-10432	OBO	RE15A854
BLOWER MOTOR ASSEMBLY: CONSISTS OF A CDA-211368 AC MOTOR CON- NECTED TO A FAN MOUNTED IN A COMMON HOUSING. WITH MOTOR HOT & 115 VOLTS, 400 CYCLE AC APPLIED. FAN HAS MINIMUM OUTPUT OF 150 CFM IN FREE AIR. WILL OPERATE IN *MK 20 MOD 1 CW-21ACX 11/24/44 KS-15105 CW:KS-15105 DEC. 44 LIST 01 ISS 1 LIST 01 ISS 1			SPLICING KIT FOR SPLICING RG-19/U CABLE. CONSISTS OF NAVY TYPE -10317 DIELECTRIC MOLD, NAVY TYPE -10329 JACKET MOLD, NAVY TYPE -10287 INJECTION GUN, CONNECTORS, SPLIC- ING MATERIALS AND MISCELLANEOUS TOOLS.			STEEL CABINET WITH BLACK CRACKLE FINISH. FOR MOUNTING TWO TYPE -50214 DC AMPLI- FIER.		
			12/5/44			12/19/44		
			JAN. 45			JAN. 45		
			RM-10425	GEN USE	RM79F173	CAOR-10433	OBO	
			VACUUM TANK STEEL TANK 30" DIAMETER AND 30" HIGH. HAS HINGED COVER.			CONVERTER TEST JIG PLASTIC BOX, 1 1/2" X 4" X 6". USED FOR TESTING CONVERTER ELEMENT OF THE OBO EQUIPMENT.		
			12/6/44			12/19/44		
			JAN. 45			JAN. 45		

RESTRICTED

NAVSHIPS 900,109

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CCY- 10434	SO-7M&SO-7N		CW- 10440			CTO- 10447	NXsr-49666	
MAGNET, PERMANENT ALNICO MAGNET FOR Y 311. FLUX DENSITY 1825 ± 25 GAUSS.			PRESSURE OF GOLD BRAID ON SLIP RINGS.			BRACKET: MOUNTING BRACKET 1160. #14 GA HOT ROLLED STEEL. FOR USE WITH NAVY TYPE -53172 RF NOISE FILTER.		
*120-5003	P1					1/13/45	4726	
12/21/44	443MS	CRPDYG:120-5003				FEB. 45		
MAR. 45		REV 9 *						
CAKO-10435	QCQ-2, QGB		CEV- 10441	080		CATF- 10448	EAQ	
SLIP RING MECHANISM A SEVEN RING SLIP RING MECHANISM FOR MOUNTING ON PROJECTOR TRAINING SHAFT TO PERMIT CONTINUOUS ROTATION OF TRAINING SHAFT IN EITHER DIRECTION. FOR USE WITH GEARS USING MCC (MAINTENANCE OF CLOSE CONTACT) PROJECTORS.			RECORDER TAPE: PAPER TAPE 50 MM WIDE, HAVING 10 LARGE DIVISIONS AND 50 SMALL DIVISIONS OF UNIFORM RURLING ACROSS THE ARCS. LEFT HAND ZERO, NUMBERS FROM 0-100 IN UNITS OF 10. USED IN CEV-55172 TAPE RECORDER.			TRAILER: FABRICATED STEEL CHASSIS MOUNTED ON TWO WHEELS AND A RETRACTABLE WHEEL. FOR HOUSING GENERATOR, ENGINE, CONTROL PANEL ACCESSORIES AND SPARES.		
12/27/44	MI-16793	CRV:M-308538	1/5/45	4313X		1/4/45	CAFP:NC-A-N-17	
MAR. 45		SUB 0	FEB. 45			FEB. 45	DATED 11-28-44	
CCF- 10436	SV		RW- 10442	GEN. SONAR USE		CTD- 10449	NXsr-49666	
BLOWER UNIT CONSISTS OF NAVY TYPE -211096 MOTOR AND A 84-CFM/00 SIROCCO BLOWER, BLOWER HOUS- ING AND WHEEL MADE OF STEEL, PROVIDED WITH INLET GUARD. HAS MIN. OUTPUT, WITH MOTOR HOT AND 115 VOLTS. 60 CYCLES AC APPLIED, OF 84 CFM IN FREE AIR. BLOWER 12/29/44 KS-5882,LOI			VACUUM & PRESSURE OIL TANK: 10 GALS. CAPACITY EQUIPPED WITH SIGHT GLASS. DIAL THERMOMETER. TWO 3/4" PIPE INLETS. ONE 3/4" PIPE DRAIN. HINGED COVER. 14" ID, 15 1/2" HIGH. FOR 15#/SQ. IN. PRESSURE AND VACUUM. STEEL, WITH SAFETY FACTOR OF TEN.			DUAL MOUNTING CASE ASSEMBLY: DUAL FILTER CONTAINER AND COVER ASSEMBLY. CAST ALUMINUM. HAS 4 SHIELDED CABLE CON- NECTORS FOR 1/4" MAX. O.D. CABLE. TO HOUSE ONE NAVY TYPE -53172 AND ONE -53174 RF NOISE FILTER OR TWO OF EITHER TYPE.		
JAN. 45		CW:KS-5882 FIG. 1, ISS 3	1/10/45	RW79F175A		1/13/45	4725	
			FEB. 45			FEB. 45		
			CYJ- 10443	NXsr-65371		CTD- 10450	NXsr-49666	
			DUMMY LOAD: CONSISTS OF THREE 150-OHM NON-INDUCTIVE RESISTORS, CONNECTED IN PARALLEL WITH PROVISION MADE TO USE FOUR 200 OHM COM- POSITION RESISTORS. PROVIDES 50-OHM NON- INDUCTIVE IMPEDANCE TO DISSIPATE RF POWER GENERATED BY TRANSMITTER WHILE OPERATING			SINGLE MOUNTING CASE ASSEMBLY: SINGLE FILTER CONTAINER AND COVER AS- SEMBLY. CAST ALUMINUM. HAS 2 SHIELDED CABLE CONNECTORS FOR 1/4" MAX. O.D. CABLE. TO HOUSE ONE NAVY TYPE -53174 OR ONE NAVY TYPE -53172 RF NOISE FILTER.		
			1/10/45	S-485		1/13/45	4729	
			FEB. 45			FEB. 45		
CASV-10437	SV		CYJ- 1443			CAFP- 10451	EAR	
COUNTER FIVE-FIGURE, HIGH SPEED, TOP-GOING, DIRECT DRIVE, NON-RESET, BALL BEARING TYPE WITH RIGHT HAND SHAFT. CAPABLE OF OPERATING AT VARYING SPEEDS UP TO 650 RPM AND CONTINUOUSLY AT 650 RPM. UNITS DIAL TO BE FIXED AT 0.			UNDER FULL POWER INPUT AND TO PROVIDE RF VOLTAGE WHICH ENABLES OPERATOR TO OBSERVE TRANSMITTER OUTPUT PULSE SHAPE, AND TO CHECK FREQUENCY OF TRANSMITTER.			SKID: A FABRICATED STEEL SKID BASE ON WHICH ARE MOUNTED TYPES CVD-18016 GASOLINE ENGINE, CAPX-211397 AC GENERATOR AND CAFP-23477 CONTROL PANEL.		
12/29/44	H-115545(SSN-45)	CW:ESA-695594				1/15/45	NJ-SA-E3	
JAN. 45		CW:KS-10140 ISS. 2				FEB. 45		
CARA-10438	SV		CTD- 10444	NXsr-49666		CW- 10452	TEF	
VENTILATING FAN ASSEMBLY: 4 - BLADED FAN DIRECTLY CONNECTED TO NAVY TYPE -211390 AC MOTOR, WITH 115 VOLTS. 60 CPS APPLIED MOTOR MIN. OUTPUT IN FREE AIR CONDITION WITH MOTOR HOT IS 700 CFM.			BRACKET: SINGLE 1164A BRACKET, HOT ROLLED STEEL, #14 GA. FOR USE WITH NAVY TYPE -53171 OR -53171-A RF NOISE FILTERS.			GROUNDING PANEL: CONTAINS GROUND TERMINALS FOR THE EXTER- NAL GROUND CONNECTION AND FOR THE GROUND WIRES IN THE CABLE.		
12/29/44	KS-15149-01	CW:KS-15149	1/13/45	17-3		1/17/45		
JAN. 45		FIG. 1 ISS. 1	FEB. 45			FEB. 45		
CRV- 10439	QCQ-1		CTD- 10445	NXsr-49666		CW- 10453	TEF	
SLIP RING MECHANISM A FIVE RING SLIP MECHANISM FOR MOUNTING ON A PROJECTOR TRAINING SHAFT TO PERMIT CONTINUOUS ROTATION OF TRAINING SHAFT IN EITHER DIRECTION.			MOUNTING CASE ASSEMBLY: SINGLE FILTER CONTAINER AND COVER AS- SEMBLY. CAST ALUMINUM. HAS 2 SHIELDED CABLE CONNECTORS FOR 1/4" MAX. O.D. CABLE. TO HOUSE ONE NAVY TYPE -53171 OR -53171-A RF NOISE FILTER.			LOW FREQUENCY DISTRIBUTION PANEL: CONTAINS TERMINAL STRIPS FOR THE LOW FREQUENCY BAY AND INTERBAY CABLING.		
1/1/45		CRV:M-308203	1/13/45	4717		1/17/45		
JAN. 45		REV 1	FEB. 45			FEB. 45		
CW- 10440	QJB		CTD- 10446	NXsr-49666		CW- 10454	TEF	
ROTARY CONTACTOR: CONSISTS OF A FIXED HEAD ASSEMBLY. PRO- VIDES MEANS OF TERMINATING 6 CIRCUITS SOLDERED TO SLIP RINGS IN THE FIXED HEAD. ROTARY ASSEMBLY HAS GOLD BRAID LOOPS WHICH ENCIROLE SLIP RINGS. ADJUST- ING NUTS PROVIDED TO MAINTAIN CONSTANT			DUAL MOUNTING CASE ASSEMBLY: DUAL FILTER CONTAINER AND COVER ASSEMBLY CAST ALUMINUM. HAS 4 SHIELDED CABLE CON- NECTORS FOR 1/4" MAX. O.D. CABLE. TO HOUSE TWO NAVY TYPE -53171 OR -53171-A RF NOISE FILTERS.			HIGH FREQUENCY DISTRIBUTION PANEL: CONTAINS TERMINAL STRIPS FOR THE HIGH FREQUENCY BAY AND INTERBAY CABLING AND A FUSE AND RECEPTACLE FOR THE 115 VOLT TEST CABLE POWER SOURCE.		
1/5/45	D-166887	BL-105140	1/13/45	4713		1/17/45		
FEB. 45		ISSUE 0	FEB. 45			FEB. 45		

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------

-10455 GEN. USE
BREAST PLATE ASSEMBLY:
CONSISTS OF ALUMINUM BREAST PLATE SWIVEL ARM, TRANSMITTER ARM, TERMINAL BOX, JACK CLAMP, BRASS THUMB NUTS, AND A 40" COTTON WEB STRAP.

1/18/45
FEB. 45

CW-10456 UP
CABINET:
EQUIPPED WITH FULL LENGTH FRONT DOORS AND REAR WHICH ARE PROVIDED WITH LOUVRES AT TOP AND BOTTOM FOR VENTILATION. INSIDE IS IRON FRAMEWORK ARRANGED TO ACCOMMODATE 45 MOUNTING PLATES 19" LONG.

1/18/45 B-405760
FEB. 45 GROUP 3

CW-10457 UP
LOW VOLTAGE ALARM PANEL:
A STEEL PANEL EQUIPPED WITH SINISTRAL RELAY WHICH OPERATES WHEN OUTPUT VOLTAGE OF THE HARMONIC GENERATOR DROPS BELOW A SPECIFIED LIMIT; PRODUCES A VISUAL AND AUDIBLE ALARM, SAME AS TYPE -10094 EXCEPT IT INCLUDES WIRING FOR A TRANS-
1/18/45 J700368-1 J700368-1
FEB. 45 LISTS 1 & 3 ISSUE 6

CW-10457
FER TO AN EMERGENCY CARRIER SUPPLY.

CW-10458 UP
CABINET:
SAME AS TYPE -10456 EXCEPT FOR PHYSICAL DIMENSION OF WIDTH AND IT IS ARRANGED TO ACCOMMODATE PANELS 23" LONG. ALSO IT IS PROVIDED WITH PERFORATED METAL TOP TO AFFORD ADDITIONAL VENTILATION.

1/18/45 B-409923
FEB. 45 GROUP 2

CW-10459 UP
STATIC RINGING GENERATOR
AND ALARM UNIT A STEEL PANEL ON WHICH ARE MOUNTED A STATIC RINGING GENERATOR (KS-5535, LIST 03) & AN ALARM BELL.

1/18/45 X-66707B-1 X-66707B-1
FEB. 45 FIG. B RU ISSUE 2

CW-10460 OCS (UP)
CABINET
SIMILAR TO TYPE -10456 EXCEPT THE FRONT DOOR EXTENDS ABOUT 3 FT FROM BOTTOM & THE REMAINING SPACE ABOVE DOOR IS ARRANGED TO MOUNT 19 INCH PANELS DIRECTLY AT FRONT. CAPACITY OF THIS FRONT MOUNTING SPACE IS 27 MOUNTING PLATES.
1/18/45 B-409914
FEB. 45 GROUP 1

CW-10460
IN ADDITION 17 MOUNTING PLATES OF SPACE ARE AVAILABLE INSIDE THE CABINET BACK OF THE FRONT DOOR.

CFE 10461 DAS-4
MOUNTING BASE
FOR MOUNTING A RECEIVER AND AN INDICATOR. CONSISTS OF 2 PLATES SEPARATED BY SHOCK MOUNTS. LOWER PLATE IS BOLTED IN POSITION AND RECEIVER AND INDICATOR ARE SUPPORTED BY UPPER PLATE. SIMILAR TO TYPE -10225 EXCEPT FOR DIFFERENCE IN DIM.
1/19/45 300.511
FEB. 45

CATU 10462 MBM
CARRYING CASE
MADE OF 1/8" AND 3/8" UREA RESIN BONDED, WATER-PROOFED PLYWOOD COVERED ON OUTSIDE WITH PYROXALIN TREATED CANVAS DUCK. INSIDE OF BODY OF CASE (COVER EXCLUDED) LINED WITH FELT AND BOTH FELT AND OUTSIDE OF CASE TREATED WITH A FUNGICIDE. RE-
1/20/45 22-C-13 CAPIZE-50028-C
FEB. 45

CATU 10462
MOVABLE COVER FASTENED TO BODY BY HINGES. 2 SNAP CATCHES AND SNAP LOCK. ALL CORNERS REINFORCED WITH LEATHER.

CPD-10463 SR-2
BULKHEAD FITTING
USED FOR UHF TRANSMISSION LINE TO GO THROUGH SCREWING IT ON BOTH ENDS - FOR PRESSURIZED FITTING.

*CRY:K-876433, SUB 0
1/24/45 CPD:205-10549
FEB. 45 *SEE ABOVE

CPD-10464 SR-2
CAJF-10464
END SEAL
A PIECE OF UHF TRANSMISSION LINE CUT IN MIDDLE AND A CERAMIC SEAL IS PUT IN TO SEAL OFF AIR FROM GETTING THROUGH TO TRANSMITTER.

1/24/45 CRY:M-439042
FEB. 45 SUB 0

CVD-10465 GENERAL USE
TRUCK
1/4 TON 4 X 4 TRUCK. INCLUDES 2 BATTERY BOXES (LESS BATTERIES), POWER TAKE-OFF PLUS 12 VOLT DC GENERATOR, TYPE COS-211000-A, ACCESSORIES IN ACCORDANCE WITH BUSHIPS MARINE CORPS REQUIREMENTS, WITH BODY & CHASSIS OF VEHICLE DRILLED & PRO-
1/20/45
FEB. 45

CVD 10465
CESS TO ACCOMMODATE RADIO EQUIPMENT. ENGINE & GENERATORS ARE RADIO SHIELDED IN ACCORDANCE WITH RE 9357A.

CVO-10466 GEN USE RE 13A917B
TRUCK PLUS ADD #1
1/4 TON 4 X 4 TRUCK. INCLUDES 2 BATTERY BOXES PLUS TWO 12 VOLT STORAGE BATTERIES, POWER TAKE-OFF PLUS 24 VOLT DC GENERATOR, TYPE COS-211410, ACCESSORIES IN ACCORDANCE WITH BUSHIPS MARINE CORPS REQUIREMENTS, WITH BODY & CHASSIS OF VEHICLE
1/20/45
FEB. 45

CVD-10466
DRILLED & PROCESSED TO ACCOMMODATE RADIO EQUIPMENT. ENGINE & GENERATORS ARE RADIO SHIELDED IN ACCORDANCE WITH RE9357A.

CPD SR-2
CAJF-10467
END SEAL 90° ASSEMBLY
CONSISTS OF TYPE CPD & CAJF-10464 END SEAL AND A PIECE OF PREFABRICATED TRANSMISSION LINE BENT AT 90°.

1/24/45 CRY:P-719819
FEB. 45 SUB 0

CBM-10468 DBM-1
ANTENNA HOUSING:
PROVIDES A WEATHERPROOF METAL ENCLOSURE FOR THE ANTENNA DRIVE UNIT AND WEATHER-PROOF FIBRE GLASS ENCLOSURE (RADOME) FOR THE ROTATING ANTENNA.

2/2/45 1039-3032
MAR. 45

CW-10469 MK 34 MOD 1&2
RADAR MOUNTING FRAME MK 2 MOD 0
A WATERTIGHT HOUSING FOR TYPE CW-43ADC RADAR TRANSMITTER RECEIVER MARK 1 MOD 1.

2/2/45 0-152911 BX-50758
MAR. 45 ISSUE 1

CW-10469-A MK 34 MOD 2
RADAR MOUNTING FRAME MARK 2
MOD 1: A WATERTIGHT HOUSING FOR TYPE CW-43ADC RADAR TRANSMITTER RECEIVER MARK 1 MOD 1, SAME AS NAVY TYPE -10469 EXCEPT IS MADE OF FABRICATED STEEL INSTEAD OF CAST ALUMINUM.
5/15/45 0-153401
JUN. 45

CAUD-10470 *SEE BELOW RE 13A 1068
REFLECTOR (ANTENNA) MARK 7
MOD 0: CORNER REFLECTING ASSEMBLY CONSISTING OF 9 PARALLEL RODS MOUNTED ON A SUPPORTING ARM. USED IN PAIRS MOUNTED 90° TO EACH OTHER TO PROVIDE DIRECTIONAL TRANSMISSION IN "L" BAND.
*RADAR BEACON MARK 2 MOD 1
2/7/45
MAR. 45

CAUD-10471 *SEE BELOW RE 13A 1068
ANTENNA MOUNT (BEACON) MARK 22 MOD 0: SECTIONALIZED STAKE 7/8" DIA. METER, 8 FEET LONG WITH ONE POINTED SECTION WHICH CAN BE LOWERED INTO THE GROUND USED TO PROVIDE SUPPORT AND ELEVATION FOR TYPES CAUD-43ADD TRANSMITTER-RECEIVER *RADAR BEACON MARK 2 MOD 1
2/7/45
MAR. 45

CAUD-10471
VER (BEACON) MARK 5 MOD 0 OR CAUD-43ADE TRANSMITTER-RECEIVER (BEACON) MARK 5 MOD 1, AND ASSOCIATED EQUIPMENT ANTENNA. INCLUDES STAKE REFLECTOR AND GUY WIRE PLATE.

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------

CAUD-10472 *SEE BELOW RE 13A 1068
CARRYING CASE (BEACON) MARK
1 MOD 0: RECTANGULAR METAL CONTAINER
WITH CARRYING STRAP FOR TRANSPORTATION
OF RADAR BEACON MARK 2 MOD 1. MAKES UP
INTO HAVESACK TYPE PACKAGE.
* RADAR BEACON MARK 2 MOD 1
2/7/45
MAR. 45

CG-10473 UM
CABINET:
MADE OF FABRICATED WELDED STEEL CONSTRUCTION WITH FRONT OPEN TO PROVIDE FOR
"RACK & PANEL" MOUNTING OF THE FOLLOWING
UNITS: TYPE CG-23433 DISCRIMINATOR
SWITCHING UNIT, TYPE CG-23482 POWER
DISTRIBUTION UNIT, TYPE CG-24471 EXCITA-
2/7/45 DL4W581A
MAR. 45

CG-10473
TION SWITCHING UNIT AND 3 TYPE CG-50247
DISCRIMINATOR UNITS ALSO INCLUDES JUNCTION
BOX FASTENED TO SCREEN OF SHIELDED
ROOM TO FORM ENCLOSED PASSAGE FOR CABLES
AND WIRES ENTERING AND LEAVING SHIELDED
ROOM. USED AS A JUNCTION BOX.

CABV-10474 AN/UPM-7
MOUNTING BRACKET (ECHO BOX):
USED TO SUPPORT -14ABA-1 ECHO BOX ON A
RADAR ANTENNA.
2/9/45 CABV:SP-5347
MAR. 45 REV 0

CABV-10475 AN/UPM-7
MOUNTING BRACKET:
SUPPORTS -66AJG PICK UP DIPOLE AT ONE
END AND HAS PROVISIONS AT OTHER END FOR
CLAMPING ONTO SO-1 PENDELTON ANTENNA.
2/9/45 CABV:SP-5334
MAR. 45 REV 2 1/9/45

CABV-10476 AN/UPM-7
MOUNTING BRACKET:
SUPPORTS -66AJG PICK UP DIPOLE AT ONE
END AND HAS PROVISIONS AT OTHER END FOR
CLAMPING ONTO SO-1 WENTWORTH, SO, SO-A,
SO-1 ANTENNAS.
2/9/45 CABV:SP-5335
MAR. 45 REV 2-19-45

CABV-10477 AN/UPM-7
MOUNTING BRACKET:
SUPPORTS -66AJG PICK UP DIPOLE AT ONE
END AND HAS PROVISIONS AT OTHER END FOR
CLAMPING ONTO SJ, SJ-A, SJ-1 ANTENNAS.
2/9/45 CABV:SP-5339
MAR. 45 REV 2-19-45

CAUM-10478 GEN. SONAR USE
SLIP RING ASSEMBLY:
CONSISTS OF ENCLOSED BRONZE HOUSING CONTAINING 6 SLIP RINGS AND BUSH ASSEMBLIES
AND 2 AN CONNECTORS
2/12/45 JS6328 JS6328
MAR. 45

COL-10479 HBF
MOUNTING BASE:
CONSISTS OF FLAT PLATE WITH FOUR CUP TYPE
SHOCK MOUNTS. HAS EIGHT SLOTS ALONG EDGE
FOR FASTENING 3/8" BOLTS. PROVIDES SHOCK
MOUNTING FOR TYPE COL-43065 RADIO TRANS-
MITTER-RECEIVER WHICH IS EQUIPPED WITH 2
CHANNELS TO WHICH THE CUP TYPE MOUNTS
2/15/45 18W-1 EPI152-3290
MAR. 45

FASTEN. COL-10479

CAUQ-10480 TBX SERIES
RAIN SHIELD:
MADE OF TRANSPARENT LUCITE TO PROTECT
TRANSMITTER-RECEIVER FROM RAIN.
2/13/45
MAR. 45

CAWK-10481 MK 6 MOD 0
MAGNET:
TWO ALNICO BAR MAGNETS ARE CAST INTO AN
ALUMINUM FRAME. A MAGNET FLUX DENSITY
OF 375±25 GAUSS IS MAINTAINED AT THE
CENTER OF THE GAP. THE SEVEN PRONG MINI-
ATURE TUBE SOCKET IS MOUNTED DIRECTLY ON
THE MAGNET FRAME IN ORDER TO INSURE
2/15/45 80-375 CAOS:348000C
MAR. 45 REV. 0

CAWK-10481
PROPER ORIENTATION OF TUBE ELEMENTS RE-
LATIVE TO THE MAGNETIC FIELD. CLAMP ON
TOP OF FRAME TO HOLD TUBE DOWN.

CME-10482 CME-60069-A
ANTENNA MOUNTING BASE:
CONSISTS OF CME TYPE A261 BRACKET AND
CPM TYPE AN-3102-16S-3P CONNECTOR MOUNT-
ING. BRACKET MOUNTS UPRIGHT WITH CONN-
ECTOR ON TOP. THIS ASSEMBLY USED AS BASE
FOR NAVY TYPE CJD-66145 ANTENNA ASSEMBLY.
2/16/45 CME:A-272 CME:A-272
MAR. 45 CHANGE A

CAOU-10483 OAH-3
SHIPPING CHEST:
PLYWOOD CHEST, FIBER COVERED AND METAL
AND FIBER REINFORCED. FOR TRANSPORTING
TYPE -10484 ACCESSORY BOX TYPE -35088
OSCILLATOR AMPLIFIER UNIT, 2 TYPE -19005
BATTERIES, AND 2 TYPE -19010 BATTERIES.
SIMILAR TO TYPE -10361 EXCEPT CONSTRUCT-
2/19/45
MAR. 45

CAOU-10483

CAOU-10484 OAH-3
ACCESSORY BOX:
METAL BOX WITH COMPARTMENTS FOR BATTERIES
EQUIPMENT, SPARE PARTS, CABLES, KEY AS-
SEMBLIES, HEADSETS ASSEMBLIES, AND DIS-
TRIBUTION UNIT. SIMILAR TO TYPE -10362
EXCEPT FOR MINOR CHANGES IN CONSTRUCTION.
2/19/45
MAR. 45

C-10485 MAR
ACCESSORY BOX:
SUBMERSION PROOF, ALUMINUM BOX, WITH
DRAWER FASTENED TO COVER, USED TO STORE
FIELD ACCESSORY COMPONENTS. OVERALL
DIMENSIONS 21 1/8" LONG, 15" DEEP, 9 1/8"
HIGH. HAS CARRYING HANDLES ON COVER AND
ALSO ON SIDES.
2/20/45 CRV:M-43916D
MAR. 45 REV. 1

CAVO-10486 MAR
CANVAS CARRYING CASE:
USED AS A COVER AND CARRYING CASE FOR
NAVY TYPE CRV-23485 REMOTE CONTROL UNIT.
2/20/45
MAR. 45

CVN-10487 SA-3
BLOWER MOTOR ASSEMBLY:
CONSISTS OF NAVY TYPE -211372 AC MOTOR
AND A BLOWER MOUNTED ON SIDE FOR COUNTER
CLOCKWISE ROTATION AND FREE AIR DELIVERY
OF 75 CU. FT. PER MIN. UNIT TO OPERATE
SATISFACTORILY FROM 0 TO 50°C.
*CRV:P-719505-1 OR 3 REV. 4
2/21/45 CVN:15-48487-C *SEE ABOVE
MAR. 45 CAR:J-17 MOTOR

CGM-10488 SA
BLOWER UNIT:
SINGLE LEFT HAND BLOWER FOR DELIVERY OF
60 CU. FT. OF AIR, SHADED POLE AC MOTOR
RATED 40 WATTS, 115/1160, 0.5 AMPS, 3000
RPM. TEMP. RISE OF 30°C ABOVE AMBIENT OF
40°C. CONTINUOUS DUTY, 2 POLES, 2 SLEEVE
BEARINGS. BOTTOM HORIZONTAL DISCHARGE.
2/21/45 2371 CRV:P-714663-3
MAR. 45 REV. 8

CC-10489 TEB
ALARM BELL:
AC PARADAY VIBRATING SIGNAL GONG 8".
OPERATES ON 220/250V AC.
2/22/45 CATALOG#2000 CVY:H2000
MAR. 45

CAY-10490 X-RDJ
OSCILLOSCOPE HOOD:
MOLDED RUBBER HOOD, 12" LONG X 6 1/4"
WIDE X 2 1/16" ON RECEIVING END, 4 3/4"
WIDE X 4 5/8" ON SCREEN END.
2/26/45 7608204-1 CAFQ:3-6250-1
MAR. 45

CKU-10491 MAR
MICROPHONE HUMMER:
HAS #8-32 STUDS.
2/23/45 BZ-7-N CRV:K-887252
MAR. 45 SUB 1

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
-10492	GEN. RADIO USE RE IOF 480		CCF- 10499	TEB		CRV- 10505	MAR	
ELECTRONIC FILTER BOX; WATERPROOF, CAST ALUMINUM BOX, FOR MOUNTING TWO RF FILTERS.			MOTOR BLOWER; CONSISTS OF A 3-PHASE MOTOR AND DUAL FANS - ONE CW WHEEL AND ONE CCM WHEEL. HOWELL MOTOR RATED 1 HP, 220V, 50/60 CYCLES, 3 PHASE 1725 RPM WITH LINE CURRENTS 3.18 AMPS. AT 60 CY., 3.6 AMPS AT 50 CY. SQUIRREL CAGE, BALL BEARING CON- 3/23/45 MODEL 125 CCF:H-69388			3/26/45 CRV:M-433913 CRV:M-43959 P-1		
3/2/45			APR. 45			APR. 45		ISSUE 0
CPD- 10493	SG-25		CCF- 10499			-10506	MAR	
GEAR REDUCTION ASSEMBLY; INCLUDES SYNCHRO CONTROL TRANSFORMER BUORD TYPE MARK 3 MOD 2 (SIZE SCT, 90- 50 VOLTS, 60 CYCLES). PRI (EXCITATION); 90 VOLTS, 0.034 AMPS; 0.8 WATTS, SEC; 50 VOLTS, SINGLE PHASE, 60 CYCLES, HAS 2 POLES.			STRUCTION, DOUBLE SHAFT EXTENSION, TROPICAL INSULATION.			SHOCK MOUNT CRADLE ASSEMBLY		
3/6/45		CRP:A-154A1-V9				3/26/45		P-728101-501
MAR. 45		SUB G				APR. 45		ISSUE 0
CW- 10494	UF		CKB- 10500	PR		CHX-		
RINGER; CONSISTS OF 2 COILS EACH OF 16900 TURNS OF #39E WIRE, TOTAL DC RES OF 2 COIL IN SERIES 4,600 OHMS MIN. INDUCTANCE IS 20 HENRIES AT 900 CYCLES.			RECORD CARRYING CASE; HOUSES A TOTAL OF 96 RECORDS, IN ANY COMBINATION OF SIZES MAXIMUM OUTSIDE DIMENSIONS: 27 1/4" WIDE X 23" LONG X 22 1/2" DEEP.			CUB- 10507 MAR MOUNTING RACK;		
3/8/45	D-161769	BA-100665	3/23/45			3/26/45	T-613931-501	M-439534 P-1
MAR. 45		ISS. 1	APR. 45			APR. 45		ISS. 0
CAJY- 10495	MAR		CKB- 10501	PR		CHX-		
AIR DRYER-SILICAGEL; SILICAGEL CARTRIDGE, 4 1/8" X 2 1/8" X 9/16" DEEP IN ALUMINUM CONTAINER.			SPEAKER CARRYING CASE; FOR CARRYING TWO TRUMPET TYPE LOUDSPEAKER MAXIMUM OUTSIDE DIMENSIONS: 22 7/8" WIDE X 40 1/2" LONG X 25 3/8" DEEP.			CUB- 10508 MAR MOUNTING RACK;		
3/8/45		CRV:X-895017	3/23/45			3/26/45	T-618931-502	M-439534 P-2
MAR. 45		SUB 0	APR. 45			APR. 45		ISS. 0
CIK- 10496	SR-1		CKB- 10502	PR		-10509	BN-1	
BUZZER; RATED 115 VOLTS AT 0.1 AMP, 3500 TURNS #36E WIRE 330 OHMS DC RESISTANCE PER COIL.			SPEAKER CARRYING CASE; FOR CARRYING FOUR 8" PERMANENT MAGNET TYPE LOUDSPEAKERS MAXIMUM OUTSIDE DIMENSIONS: 28 3/4" WIDE X 28 3/4" LONG X 19" DEEP.			BLOWER MOTOR ASSEMBLY;		
3/9/45	Z2	CRV:M-439016	3/23/45			3/26/45		CFN-300503-1
MAR. 45		SUB 0	APR. 45			APR. 45		REV 12
CW- 10497	PM		CKB- 10503	PR		CAY- 10510	BN-1	
BELL, AC OR DC; OPERATES ON 4 VOLTS MIN, 9 VOLTS MAX AC 50-60 CPS; OR 2 VOLTS MIN, 5 VOLTS MAX DC, TWO COILS, 230 TURNS #26E WIRE EACH, CONNECTED IN SERIES, WITH A TOTAL DC RES OF 2.6 OHMS ±10%. EFFECTIVE RESISTANCE TO DC OR IMPEDANCE TO AC APPROX 3 TIMES			SPEAKER CARRYING CASE; FOR CARRYING TWO 8" PERMANENT MAGNET TYPE LOUDSPEAKERS MAXIMUM OUTSIDE DIMENSIONS 17 1/8" WIDE X 32" LONG X 19" DEEP.			BLOWER MOTOR ASSEMBLY;		
3/16/45	D-164775	BA-106395	3/23/45			3/26/45		CFN-300521-2
MAR. 45		ISS. 1	APR. 45			APR. 45		REV 7
		CKW-10497	CKB- 10504	PR		CNA- 10511	RDZ	
DC RESISTANCE, MOISTURE AND FUNGUS RESISTANCE WITH HEAVY SILVER CONTACTS & REED MOUNTED ARMATURE WITH FLAT RE-TRACTILE SPRING AND A STOP.			ACCESSORY CARRYING CASE; HOUSES 2 TABLE TYPE MICROPHONE STANDS, ONE FLOOR TYPE MICROPHONE STAND, 3 MICROPHONES, THREE 25 FT., MICROPHONE CABLES, ONE 10 FT. AUDIO CABLE, ONE 100 FT AUDIO EXTENSION CABLE, ONE 10 FT. RECORDPLAY-ER POWER CABLE, ONE 10 FT AMPLIFIER			CABINET; METAL CABINET TO HOUSE MODEL RDZ EQUIP-MENTS.		
3/23/45			3/23/45			3/30/45	BM:147	J125
APR. 45			APR. 45			APR. 45		
CANG- 10498	GEN. USE		CKB- 10504			CNA- 10512	RDZ	
ELECTRONIC TERMINAL KIT; STEEL BOX, 12" X 20" X 2 1/2", WITH COM-PARTMENTS, INCLUDES 2 WIRE STRIPPERS, 25 TYPES OF SOLDERLESS TERMINALS AND INSU-LATING TUBING. USED TO MAKE EMERGENCY REPAIRS ON BOARD SHIP.			POWER CABLE AND ONE 10 FT. RADIO RECEI-VER POWER CABLE MAXIMUM OUTSIDE-DIMEN-SIONS 18 1/8" WIDE X 44 1/2" LONG X 10 1/2" DEEP.			FRONT PANEL ASSEMBLY; USED TO MOUNT TYPES CNA-20407 RECTIFIER POWER SUPPLY COL-23431 AUTOMATIC TUNING UNIT, CFT-40148 CRYSTAL OVEN, CNA-46275 PRESELECTOR & CONVERTER UNIT CNA-46274 IF/AF UNIT AND CNA-53280 R.F. FILTER UNIT (ALL COMPLETE WITH COVERS).		
3/23/45			3/30/45	BM:148		3/30/45	BM:148	J134
APR. 45			APR. 45			APR. 45		

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
CNA- 10513 RDZ FILTER COVER: COVER FOR TYPE CNA-53280 R.F. FILTER UNIT, HELD ON PLACE BY "AIRLOC" FASTENERS FOR CONVENIENT REMOVAL FROM RF FILTER COMPARTMENT. 3/30/45 SA:2808 J 151 APR. 45			CANK- 10519 SG-R/SG-1 MAGNET: PERMANENT OF ALNICO. FIELD STRENGTH 1390±15-GAUSS. 9 1/2" X 4 3/4" X 2 1/2". HAS FOUR 9/32 DRILL HOLES. 4/5/45 CANK-3-1380 CRP:U74-5043-2 APR. 45 CRP-120-5002-P2 REV 1			CAAQ CRY- 10524 MAR SHIPPING CHEST: VULCANIZED FIBRE ON PLYWOOD WITH METAL CORNER PROJECTORS. USED FOR CARRYING NAVY TYPE: CRY-23455 REMOTE CONTROL UNIT AND CRY-50248 MODULATOR-DYNAMOTOR UNIT. OVERALL DIMENSIONS 33 5/8" LONG 20 1/2" 4/12/45 CRY:W-308141 MAY 45 PART I		
CG- 10514 SP-1H BLOWER MOTOR ASSEMBLY CONSISTS OF BLOWER WITH NAVY TYPE -211398 MOTOR. BLOWER RATED 100 C F M AT 1" R.P. BLOWER CCF: *0 4/3/45 MOTOR CG: CG:M-8376823 MAY 45 5KH25AC22A REV 4			CAUA- 10520 MFA BUZZER: 115 VOLTS. 60 CPS. 0.056 AMPS. 5.4 WATTS. 845 PF VOLUME 68 DB MIN. FUNDAMENTAL REED FREQUENCY 120 CYCLES. CONTAINS 2 COILS IN SERIES. EACH 4000 TURNS HF 39 WIRE. DC RES FOR BOTH COILS IN SERIES IS 900 OHMS. 4/5/45 22 SPECIAL CBM-746-569 APR. 45 ALT 0			CAAQ CRY- 10524 WIDE X 13 1/4" DEEP. HAS TWO SIDE CARRY- ING HANDLES. FUNGUS AND MILDEW PROOF. WILL PASS 50 HOUR SALTSpray TEST. PAINTED WITH MARINE CORPS GREEN ENAMEL.		
CAF1- 10515 NSR-53383 MICROPHONE TABLE STAND: 7" HEIGHT RETRACTED. 11 1/4" HEIGHT EX- TENDED. 5 15/16" DIAMETER. FUNGUS PROOFED. 4/3/45 CAF1:5320 CKB-41-400A099-2 APR. 45 CHANGE A			CW- 10521 SS FOCUSING MAGNET: INCLUDES A TOROIDAL SHAPED MAGNET MAGNETIZED AXIALLY. ASSEMBLY IS MOUNTED AROUND THE NECK OF THE SFP7 CATHODE RAY TUBE 9 SUITABLE ARRANGEMENTS ARE PRO- VIDED TO ADJUST THE POSITION OF THE MAG- NET ECCENTRICALLY. A SHUNTING ARRANGE- 4/9/45 D-152487 80-60320 APR. 45 ISSUE 1			CAAQ CRY- 10525 MAR SHIPPING CHEST: VULCANIZED FIBRE ON PLYWOOD WITH METAL CORNER PROJECTORS. USED FOR CARRYING NAVY TYPES -43067 TRANSMITTER-RECEIVER AND -66147 ANTENNA ASSEMBLY AND ACCESS- ORIES. OVERALL DIMENSIONS APPROXIMATELY 4/12/45 CRY:W-308142 MAY 45		
CAF1- 10516 NSR-53383 MICROPHONE FLOOR TYPE STAND: 44" HEIGHT RETRACTED. 69" HEIGHT EXTEND- ED. 15 5/8" CROW FOOT BASE. FUNGUS PROOFED. 4/3/45 CAF1:S-55-A CKB-41-400A088-3 APR. 45 CHANGE A			CW- 10521 MENT IS PROVIDED SO THAT THE STRENGTH OF THE MAGNET FIELD MAY BE ADJUSTED. THESE ADJUSTMENTS PERMIT CENTERING AND FOCUSING OF CATHODE RAY BEAM.			CAAQ CRY- 10525 37 1/4" LONG X 30 3/4" WIDE X 13 1/4" DEEP. HAS FOUR SIDE CARRYING HANDLES. FUNGUS AND MILDEW PROOF. WILL PASS 50 HOUR SALTSpray TEST. PAINTED WITH MARINE CORPS GREEN.		
CBM- 10517 MCA TRAINING UNIT: INCLUDES TYPE CBP-21357 TRAINING MOTOR AND GEAR REDUCTOR. SIMILAR TO TYPE -10035-A EXCEPT HAS NEW GEAR REDUCTOR WHICH CAN BE ROTATED AT 12.5 RPM AS WELL AS 4 RPM AND THE TRAINING LIMIT SWITCH HAS BEEN REMOVED. 4/4/45 776D MOD APR. 45			10522 MAR SHIPPING CHEST: VULCANIZED FIBRE ON PLYWOOD WITH METAL CORNER PROJECTORS. USED FOR CARRYING FIELD APPLICATION KITS ACCESSORIES OF MAR. OVERALL DIMENSIONS APPROX 31 1/4" LONG X 20 1/2" WIDE X 14 5/8" DEEP. HAS TWO SIDE CARRYING HANDLES. FUNGUS AND 4/12/45 CRY:-308139 APR. 45 PART I			CCF- 10526 TDQ BLOWER: TO BE USED WITH NAVY TYPE -211257 MOTOR. TIP SPEED 2235 FT/MIN. COUNTERCLOCK- WISE ROTATION. BOTTOM HORIZONTAL DIS- CHARGE. FREE DELIVERY 83 CFM. OUTLET VELOCITY 2450. BRAKE HP 0.019. WITH 1/8 RESISTANCE PRESSURE FREE DELIVERY 74 4/16/45 700 SIROCCO CRY:P-71770-4 MAY 45 REV. 3		
CBM- 10517-A MCA-2 TRAINING UNIT: INCLUDES TYPE CBP-21357 TRAINING MOTOR AND GEAR REDUCTOR. SIMILAR TO TYPE -10035-B EXCEPT HAS NEW GEAR REDUCTOR WHICH CAN BE ROTATED AT 12.5 RPM AS WELL AS 4 RPM AND THE TRAINING LIMIT SWITCH HAS BEEN REMOVED. SAME AS -10517 EXCEPT 4/4/45 776H MOD APR. 45			-10522 MILDEW PROOFS. WILL PASS 50 HOUR SALTS- PRAY TEST. PAINTED WITH MARINE CORPS GREEN ENAMEL.			CCF- 10526 CFM. OUTLET VELOCITY 2180 AND BRAKE HP 0.015. WITH 1/4 RESISTANCE PRESSURE FREE DELIVERY 59 CFM. OUTLET VELOCITY 1800 AND BRAKE HP 0.01.		
CBM- 10517-A HAS MALLIABLE IRON END BELLS AND STEEL FRAME AND WINDINGS ARE SLIGHTLY DIFFER- ENT.			-10523 MAR SHIPPING CHEST: VULCANIZED FIBRE ON PLYWOOD WITH METAL CORNER PROJECTORS. USED FOR CARRYING NAVY TYPE CRY-20379 VIBRATOR POWER UNIT AND ACCESSORIES. OVERALL DIMENSIONS APPROXIMATELY 31 1/4" LONG X 20 1/2" WIDE X 14 5/8" DEEP. HAS TWO SIDE CARRY- 4/12/45 CRY:W-308139 APR. 45 PART 2			CHF- 10527 GEN. RADIO USE CRYSTAL UNIT CONTAINER: STEEL BOX. WITH PHENOLIC TRAYS. TO HOLD 120 CRYSTAL UNITS. NAVY TYPE -40161, -40162, OR -40163. APPROX 10" X 5" X 1 1/4". 4/19/45 MAY 45		
CG- 10518 SP-1M BLOWER, MOTOR ASSEMBLY: CONSISTS OF BLOWER WITH NAVY TYPE -211493 MOTOR. B MOTOR: CG-5KH47E9242A BLOWER: CCF: #0 MOD 4/4/45 BSEE ABOVE CG:P-7766184-P1 APR. 45 REV. 0			-10523 ING HANDLES. FUNGUS AND MILDEW PROOF. WILL PASS 50-HOUR SALTSpray TEST. PAINTED WITH MARINE CORPS GREEN ENAMEL.			CPN- 10528 REJ MOUNTING RACK: UNIT USED TO MOUNT TYPE CPN-55182 PANORAMIC RADIO ADAPTER AND TYPE CPN- 55188 PANORAMIC RADIO ADAPTER WITH DUST COVER. 4/21/45 P4-5007 MAY 45 REV 0		

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------

CAXR- 10529 TEC
 WATER FLOW INDICATOR:
 SCALE 0-30 GALLONS/MINUTE. MAIN DIVISIONS EVERY 5 GALLONS. SUB DIVISIONS EVERY 0.5 GALLONS. NORMALLY OPEN ALARM CONTACT WITH HIGH FLOW.

4/24/45 #93CLASS B DNG IN FILE
 MAY 45

CFV- 10530 TEC
 WATER TEMP GAUGE:
 SCALE 0-75° MAIN DIVISION EVERY 10°. SUB-DIVISION EVERY 1°. 5" DIAL WITH ALARM CONTACTS AND 5/8" X 5" BULB WITH 1" BUSHING.

4/24/45 CLASS 2
 MAY 45 CODE 2312

CAQZ- 10531 TBX-8
 TELEGRAPH KEY LEG BAND:
 FOR USE WITH NAVY TYPE -26026 TELEGRAPH KEY OR AS PART OF NAVY TYPE -26022 KEY. CORD AND PLUG ASSEMBLY FOR MOUNTING KEY ON OPERATORS LEG.

4/23/45
 MAY 45

CW- 10532 QDA
 VOLTAGE REGULATOR CABINET:
 SHOCK MOUNTED STEEL CABINET IN WHICH ARE HOUSED (1) TYPE CAIU-302319 TILT CONTROL VOLTAGE REGULATOR, 1 TYPE CAIU-302320 TRANSMITTER RECEIVER VOLTAGE REGULATOR, 1 TYPE CAIU-23502 VOLTAGE REGULATOR CONTROL UNIT. PART OF TYPE CW-302321 VOLT-
 4/23/45 D-171073 B-158056
 MAY 45 ISSUE 1

CW- 10532

AGE REGULATOR ASSEMBLY.

CASV- 10533 SS
 COUNTER:
 DESIGNED TO OPERATE AT 400 YDS PER REVOLUTION OF MAIN INPUT SHAFT. UNITS POSITION OF COUNTER IS LEFT BLANK FOR ON INDEX MARK. TENS POSITION IS MARKED WITH DIGITS WHICH ARE ALTERNATELY 0 AND 5 YARDS RESPECTIVELY WHEN DIGIT IS OPPO-
 4/30/45 CW:KS-10264 CW:BL-60513
 MAY 45 W-68721-1 ISSUE 1

CASV- 10533
 SITE THE INDEX MARK IN UNITS POSITION. ALL WHEELS HAVE WHITE FIGURES ON BLACK GROUND. COUNTER IS A 5 DIGIT COUNTER & READS FROM 0 TO APPROXIMATELY 60,000 YARDS WHEN STOPS OF TYPE CW-10AGF RANGE GEAR UNIT ASSEMBLY ARE PROPERLY ADJUSTED.

CW- 10534 QDA
 TRANSMITTER-RECEIVER
 CABINET: SHOCK MOUNTED STEEL CABINET WHICH PROVIDES HOUSING FOR 1 TYPE CW-46278 RECEIVER UNIT, 1 TYPE CW-35096 OSCILLATOR UNIT AND 1 CW-50256 DRIVER AMPLIFIER UNIT. INCLUDES CIRCUITS FOR TEST PURPOSES, MOTOR DRIVEN FAN, HEATER
 4/23/45 D-171067 B-158062
 MAY 45 ISSUE 1

CW- 10534
 AND ASSOCIATED TRANSFER RELAY WITH GUARD LAMP AND SOCKET TO INDICATE OPERATING CONDITION. 2 MISCELLANEOUS TRANSFER RELAYS, WITH ASSOCIATED JACKS. PILOT LAMP ASSEMBLY FOR ILLUMINATING METER ON TYPE CW-50256 DRIVER AMPLIFIER UNIT. MAIN TERMINAL PANEL AND LOCAL CABLE. PART OF TYPE CW-43068 TRANSMITTER-RECEIVER ASSEMBLY.

CW- 10535 QDA
 TRANSMITTER-RECEIVER POWER CABINET: SHOCK MOUNTED STEEL CABINET FOR HOUSING 1 CAIU-23503 POWER CONTROL UNIT, 1 CAIU-20422 RECTIFIER POWER UNIT AND 1 CAIU-20423 RECTIFIER POWER UNIT. INCLUDES BLOWER, HEATER AND LOCAL CABLE. PART OF TYPE CW-20424 TRANSMITTER-
 4/28/45 D-171071 B-158047
 MAY 45 ISSUE 1

CW- 10535

RECEIVER POWER SUPPLY.

CANN- 10536 QDA
 OPERATOR'S CHAIR:
 UNIT CONSISTS OF A MOVABLE SEAT STRUCTURE INCLUDING A BACK FOR USE DURING OPERATION OF THE TYPE CW-55133 RECORDER AND CONTROL CONSOLE, ARRANGED TO FOLD INTO A RECESS IN THE CONSOLE STAND WHEN NOT IN USE & TO BE LOCKED IN EITHER THE
 4/24/45 KS-9867 CW:BD-158014
 MAY 45 ISSUE 3

CANN- 10536

OPERATING OR STORED POSITION.

CASV- 10537 SS
 COUNTER:
 DESIGNED TO OPERATE AT 1.0 MILE PER REVOLUTION OF MAIN INPUT SHAFT. A 3 DIGIT COUNTER READING IN TENTHS OF A MILE, A DECIMAL POINT BEING INSERTED ON FRAME OF COUNTER. WHEN MOUNTED IN TYPE CW-10AGF RANGE UNIT GEAR ASSEMBLY IT
 4/30/45 CW:KS-10263 CW:BL-60482
 MAY 45 W-687221 ISSUE 1

CASV- 10537
 INDICATES RANGES FROM 0 TO APPROXIMATELY 80 MILES. WHEEL TO RIGHT OF DECIMAL HAS BLACK FIGURES ON A WHITE BACKGROUND. THE OTHER WHEELS HAVE WHITE FIGURES ON A BLACK BACKGROUND.

CASV- 10538 SS
 COUNTER:
 DESIGNED TO OPERATE AT 400 YARDS PER REVOLUTION OF THE MAIN SHAFT. UNITS POSITION OF COUNTER IS LEFT BLANK EXCEPT FOR AN INDEX MARK TENS POSITION IS MARKED WITH DIGITS WHICH ARE ALTERNATELY 0 AND 5 YARDS RESPECTIVELY WHEN DIGIT
 4/30/45 CW:KS-10253 CW:BL-60512
 MAY 45 N-113545 ISSUE 1

CASV- 10538
 IS OPPOSITE INDEX MARK IN THE UNITS POSITION. ALL WHEELS HAVE WHITE FIGURES ON BLACK BACKGROUND. SIMILAR TO TYPE CASV-10333 COUNTER EXCEPT IT IS SMALLER IN SIZE & HAS SMALLER NUMERALS.

CASV- 10539 SS
 COUNTER:
 DESIGNED TO OPERATE AT 1 MILE PER REVOLUTION OF MAIN INPUT SHAFT. A 3 DIGIT COUNTER READING IN TENTHS OF A MILE, A DECIMAL POINT BEING INSERTED ON FRAME OF COUNTER. IT INDICATES RANGES FROM 0 TO APPROXIMATELY 80 MILES. WHEEL
 4/30/45 CW:KS-10252 CW:BL-60483
 MAY 45 M-113543 ISSUE 1

CASV- 10539
 TO RIGHT OF DECIMAL HAS BLACK FIGURES ON A WHITE BACKGROUND. THE OTHER WHEELS HAVE WHITE FIGURES ON A BLACK BACKGROUND, SIMILAR TO TYPE CASV-10537 COUNTER EXCEPT IT IS SMALLER & HAS SMALLER NUMERALS.

CW- 10540 UN
 PATCHING CABINET
 STEEL CABINET, 7 FT HIGH, 17" DEEP, 24 1/4" WIDE. HOUSES 13" PANELS FOR STANDARD DOUBLE JACKS AND PLUGS. MOISTURE PROOF.

5/5/45 X-660160G
 MAY 45

CASV- 10541 AN/ARQ-10
 COUNTER
 THREE FIGURE RANGE 0-999. DIRECT DRIVE. SPEED NOT TO EXCEED 100 RPM, FLANGE AT WINDOW STYLE.

5/8/45 CFT:NL-35414-2F
 MAY 45

CAVF- 10542 GEN. SONAR USE
 SLIP RING ASSEMBLY:
 CONSISTS OF ENCLOSED HOUSING CONTAINING 6 SLIP RINGS AND BRUSH ASSEMBLIES.

5/23/45 CW:D-166887 CW:ESX-652909
 JUN. 45 ISSUE 5

CWV- 10543 MAN
 SHIPPING CHEST:
 PLYWOOD CHEST, FIBRE COVERED AND METAL REINFORCED, TRUNK TYPE CONSTRUCTION. POP TRANSPORTING TYPE -43069 RADIO TRANSMITTER RECEIVER.

5/25/45
 JUN. 45

CADV- 10544 OCV
 ACCESSORY CASE
 CONTAINS 1 TYPE CADV-66151 DIPOLE ANTENNA, 1 TYPE CADV-10545 TRIPPOD, 2 LENGTHS OF R.F. TRANSMISSION LINES (6 FT. & 20 FT.), TYPE CADV-471036 LOOP PROBE, TYPE CADV-471037 LINE PROBE, TYPE CADV-471228 MATCHING IMPEDANCE, & HAS SPACE FOR CAN-
 5/22/45
 JUN. 45

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------

NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION	NAVY TYPE DESIGNATION	FIRST ASSIGNED FOR	NAVY DRAWING OR SPECIFICATION
-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------	-----------------------	--------------------	-------------------------------

CADY- 10544

VAS COVER. CONTAINS CALIBRATION SHEETS. MADE OF ALUMINUM OR BONDED ALUMINUM PLYWOOD. APPROXIMATELY 36" LONG, 7" DEEP AND 9" HIGH.

CADY- 10545 OCV

ANTENNA TRIPPOD
NON-METALLIC CONSTRUCTION. WHEN FULLY EXTENDED IS APPROXIMATELY 94" LONG. FOR USE WITH TYPE -66151 DIPOLE ANTENNA.

5/26/45
JUN. 45

-10546 FOR USE WITH OCM

MOBILE MACHINE SHOP TRAILER
5 TON, 4 DUAL WHEEL TRAILER CONTAINING A SKW WELDING UNIT, 11" LATHE, BENCH GRINDER, OXYACETYLENE WELDING EQUIPMENT, SMALL TOOLS AND AIR COMPRESSOR PLUS MISCELLANEOUS MATERIAL. SIMILAR TO NAVY TYPE -10405 EXCEPT IN TRAILER AND MODI-

5/29/45
JUN. 45

-10546

FICATION OF MATERIAL LIST.

DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER	ASSIGNED ISSUED	DATE	MANUFACTURER'S DESIGNATION	MANUFACTURER'S DRAWING NUMBER
------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------	-----------------	------	----------------------------	-------------------------------