


HOME THEATER POWER MANAGEMENT

Model: MR4300

Specifically designed and engineered to provide protection, filtration and power monitoring for your home theater system. Media lights illuminate equipment.

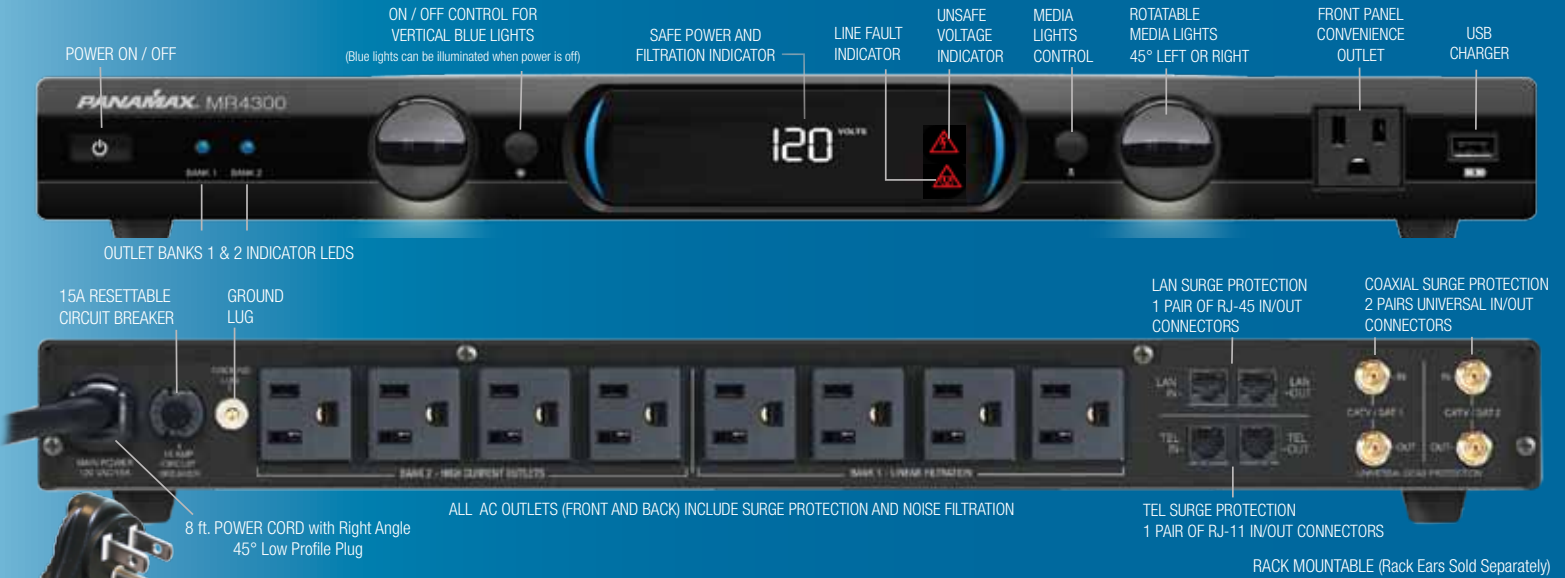

FEATURES

- USB Charger
- Isolated Linear Level 3 Filtration & High Current Outlet Banks
- Exclusive Automatic Voltage Monitoring (AVM)
- Protect or Disconnect™ Technology
- Antenna, Cable, or Satellite and LAN Signal Protection
- Media Lights Illuminate Equipment
- 8 ft. Power Cable with Low Profile Plug

SPECIFICATIONS



AC PROTECTION

Protect or Disconnect Circuitry	Yes
Automatic Voltage Monitoring Circuit	Yes
Oversvoltage Shutoff	135V ± 2V
Undersvoltage Shutoff	100V ± 2V
Thermal Fusing	Yes
Line Voltage	120VAC, 50/60HZ
Initial Clamping Level	200V Peak, 141VRMS
Voltage Protection Rating (UL 1449 3rd Edition, 3,000A)	330V
Nominal Discharge Current (UL 1449 3rd Edition)	3,000A
Protection Modes	L-N, L-G, N-G
Maximum Current Rating	15A (1800W)
EMI/RFI Noise Filtration	Panamax Level 3 Noise Filtration*
Response Time	< 1ns
Single Pulse Energy Dissipation	1575 Joules



LAN PROTECTION

Clamping Level	62V ± 6V @ 1 mA
Compatibility	10/100/1000bT
Wires Protected	8-Wires
Connectors	RJ-45



TEL PROTECTION

Fuseless/Auto-Resetting	Yes
Clamping Level	260V
Wires Protected	2 Wires, 1 Pair (4, 5)
Connectors	RJ-11



UNIVERSAL COAX PROTECTION

HD 1080 i/p Ready	Yes
Bidirectional	Yes
Shielded	Yes
Clamping Level	75V
Frequency Range	0MHz - 2.2 GHz
Insertion Loss	<0.5 dB
Connections	Female "F", Gold Plated

WEIGHTS, DIMENSIONS AND UPC CODES

MODEL	UNIT DIMENSIONS	WEIGHT	CARTON DIMENSIONS	WEIGHT	UPC	MASTER PACK QTY	MASTER PACK UPC
MR4300	6"l x 17"w x 1.75"h 2.19"h with feet	6.5 lbs	12" x 19.5" x 5"	9 lbs	050616008938	4	50050616008933

*Go to www.panamax.com for detailed noise filtering information. Specifications subject to change due to product upgrades and improvements

