



OCW-E100 Operation Critical Wireless Earpiece PTT PMLN7851



MN004867A01-AA

en-US

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 2018 Motorola Solutions, Inc. All rights reserved.

Printed in

FCC: AZ489FT6020
IC: 109U-89FT6020



OPERATIONAL CRITICAL WIRELESS EARPIECE PTT PMLN7851

Congratulations on your new Motorola Solutions Operation Critical Wireless (OCW) Earpiece PTT! This earpiece device is designed to allow you the convenience of Bluetooth technology by enabling you to comfortably wear it for long periods of time. Furthermore, the Bluetooth earpiece is exclusively designed with PTT functionality for business radio applications and optimized to work with Motorola Solutions two-way radio and Motorola Solutions applications.

This user guide contains the operation and pairing instructions of the earpiece. Before getting started, please make sure you read and understand the RF and Acoustic Safety sections, which contain very important information about this product.

FOREWORD

Product Safety and RF Exposure Compliance

Caution Before using this product, read the operating instructions for safe usage contained in the RF Energy Exposure and Product Safety Guide enclosed with your radio.

ATTENTION!

The radio is restricted to occupational use only to satisfy ICNIRP/FCC RF energy exposure requirements. Before using this product, read the RF energy awareness information and operating instructions in the RF Energy Exposure and Product

Usage Guide enclosed with your radio (Motorola Solutions Publication part number 6881095C98 (US) or 6864117B25 (EMEA)) to ensure compliance with RF energy exposure limits. This device complies with part 15 of the FCC Rules and Industry Canada license-exempt RSS standard (s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. **(3) Changes or modifications made to the device, not expressly approved by Motorola Solutions, could void the authority of the user to operate this device.**

Battery Information:

Battery is shipped with a nominal charge between 30% and 50%. Battery should be stored between -10 °C (14 °F) and 30 °C (86 °F) to minimize permanent capacity loss.

Caution: Storing your fully charged accessory in high-temperature conditions may permanently reduce the life of the internal battery.

Note: The battery is not a user replaceable part.

Important Information:

- Do not charge your accessory in temperatures below 0 °C (32 °F) or above 45 °C (113 °F). Do not store your accessory in direct sunlight or where

expected temperatures can exceed this range such as inside a parked car.

- Storing your fully charged accessory in high-temperature conditions may permanently reduce the life of the internal battery.
- Battery life may temporarily shorten in low temperature conditions.

ACOUSTIC SAFETY

Exposure to loud noises from any source for extended periods of time may temporarily or permanently affect your hearing. The louder the radio's volume, the less time is required before your hearing could be affected. Hearing damage from loud noise is sometimes undetectable at first and can have a cumulative effect.



To protect your hearing:

- Use the lowest volume necessary to do your job.
- Turn up the volume only if you are in noisy surroundings.
- Turn down the volume before adding headset or earpiece.
- Limit the amount of time you use headsets or earpieces at high volume.

GETTING STARTED

Before you start, make sure that the earpiece is fully charged. Recommended charging time is two (2) hours.

OPERATIONAL CRITICAL WIRELESS EARPIECE PTT OVERVIEW

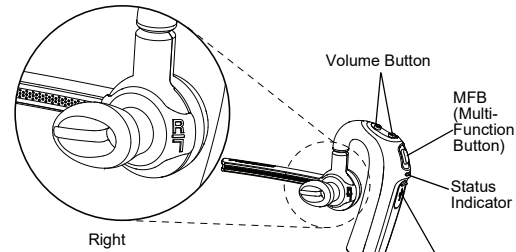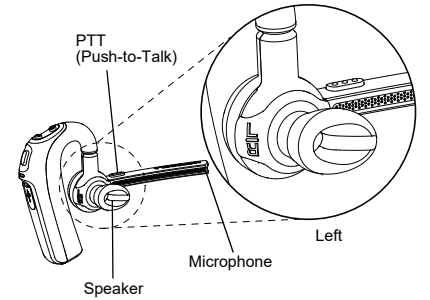

POWER ON/OFF YOUR DEVICE

There are two operation modes, LMR and LTE. LMR mode is for device to work with a Motorola Solutions radio as a PTT device; and LTE mode is for device to work with a smartphone as a standard Bluetooth headset and as a PTT device (while working with Motorola Solutions APP). To power on device according to your preference, follow the following table:

| Operation | Activation | LED | Tone | Prompt |
|-----------|---|----------------------------------|------|---|
| LMR | Press MFB for 2 to 3 seconds | Flashing blue for 7 cycles | N/A | "LMR" followed by "Battery High (or Medium or Low)" |
| LTE | Press MFB and Vol + together for 2 to 3 seconds | Flashing blue twice for 3 cycles | N/A | "LTE" followed by "Battery High (or Medium or Low)" |

To power off device:
1. Press the MFB button for more than 3 seconds. A "Power Off" prompt sounds. The LED turns off.

PAIRING YOUR DEVICE

To put device into discoverable mode for pairing:
1. Make sure that the device is at power off state.

| Operation | Activation | LED | Tone | Prompt |
|-----------|---|----------------------------------|------|---|
| LMR | Press MFB for 5 to 6 seconds | Flashing blue for 7 cycles | N/A | "LMR", "Battery High/Medium/Low", "Pairing" |
| LTE | Press MFB and Vol + together for 5 to 6 seconds | Flashing blue twice for 3 cycles | N/A | "LTE", "Battery High/Medium/Low", "Pairing" |

- Blue LED flashes alternatively.
- Device remains in discoverable mode for 180 seconds. Host (a radio or phone) completing the process successfully connects to the device.

If you cannot connect to the earpiece:

- Turn off your smart phone Bluetooth function and turn on again.
- Restart your smart phone, try to pair and reconnect.

OPERATING YOUR DEVICE

LMR mode

Device can perform PTT function with a Motorola Solutions LMR radios. After device connects to a radio, pressing PTT button enables one-way communication such that voice taken from local microphone can be transmitted to the remote radio. Releasing the PTT button puts the device back to (default) stand-by mode and audio transmitted from the remote radio can be heard from the local speaker.

LTE mode

When device connects to a smartphone in LTE mode, it can function as a standard Bluetooth headset that supports phone conversation and stereo music listening. In addition, if Motorola Solutions APP is running (on either iOS or Android platform), it can work as a PTT device similar to radio use case. The following table shows user interfaces with different functions.

| Operation | Activation | LED | Tone | Prompt |
|----------------------|-------------------------|-----------------|-------------|--------|
| Answer call | Click MFB | Heart-beat Blue | Single tone | - |
| Reject call | Long-press MFB (>1s) | | Exit tone | |
| End call | Click MFB | | Exit tone | |
| Play/pause | Click MFB | | - | |
| Skip forward | Double click Vol+ | | - | |
| Skip backhand | Double-click Vol- | | - | |
| Volume up (repeat) | Click Vol+ (Press Vol+) | | Step tone | |
| Volume Down (repeat) | Click Vol- (Press Vol-) | | Step tone | |

| Operation | Activation | LED | Tone | Prompt |
|------------------------|---------------------------|-----------------|-------------|------------------------------|
| Maximum Volume reached | When volume 12 is reached | Heart-beat Blue | Double tone | - |
| Minimum Volume reached | When volume 0 is reached | | Double tone | |
| Paired | - | | - | |
| Connected | - | - | - | Your headset is connected |
| Disconnected | - | Solid Blue | - | Your headset is disconnected |
| Idle | - | Solid Blue | - | - |
| Reconnecting | - | Heart beat Blue | - | Lost Connection |
| Critical Low Battery | - | - | - | Power Off |

When earpiece detects low battery, the current LED color is changed from blue to red, and a "Battery Low" prompt sounds periodically.

CHARGING YOUR DEVICE

Plugging in the USB charging cable to the device triggers charging activity. LED color remains red throughout the charging process and turns into solid green when battery is fully charged. Device must be turned off during charging.

WARRANTY

Motorola Solutions offers a standard one year warranty. Contact your Motorola Solutions dealer for detailed information on the standard warranty. **Note:** Warranty is void after customer replacement of any parts other than replacement parts listed. For more information about this product, please contact your Motorola Solutions Authorized Dealer or visit us at: www.motorolasolutions.com/bluetoothaccessories

REPLACEMENT PARTS

| Part Number | Description |
|-------------|-----------------------------|
| PMLN7940_ | Small Earbud for OCW BT PTT |
| PMLN7941_ | Large Earbud for OCW BT PTT |

CONSIGNES DE SECURITY IMPORTANTES

Exposition aux radio fréquences et sécurité du produit

Attention!

Cette capteur ne doit être utilisée qu'à des fins professionnelles. Avant d'utiliser la radio, lisez le guide Radios bidirectionnelles portatives: exposition aux radiofréquences et sécurité du produit, qui contient d'importantes instructions de fonctionnement pour une utilisation sécuritaire et des informations sur l'exposition aux fréquences radioélectriques, dans le but d'assurer votre conformité aux normes et règlements en vigueur.

Avis aux utilisateurs (FCC et Industrie Canada)

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence et à la partie 15 des règlements de la FCC.

- Cet appareil ne doit pas causer d'interférence nuisible.
- Cet appareil doit accepter toute interférence reçue, y compris les interférences pouvant entraîner un fonctionnement indésirable.

- Toute modification effectuée à cet appareil sans l'autorisation explicite de Motorola Solutions peut annuler l'autorisation d'utiliser cet appareil.

DRAFT