

# NINGBO LITESUN ELECTRONICS CO., LTD

Model: LH-7-1

## Outdoor Wi-Fi Power Stake



MODEL: LH-7-1  
ITM./ART. 1275483

### Quick Start for CE Smart Wi-Fi Power Stake Setup:

1. Use your phone to scan the QR code below or search for "CE Smart" in the App Store or Google Play to download and install the App. For iPad's select "iPhone Only" option in the App Store to locate CE Smart App.



2. Connect mobile device to your 2.4GHz Wi-Fi network. Please note this Smart Plug can only be connected via a 2.4GHz network.



3. Launch CE Smart and follow the in-app instructions to connect the Smart Plug to your network.

a. Login to CE Smart



b. Click Add Device



c. Set rapid blink, click Confirm




d. Enter Wi-Fi password



e. Connecting device



f. Edit Name, Share or Done

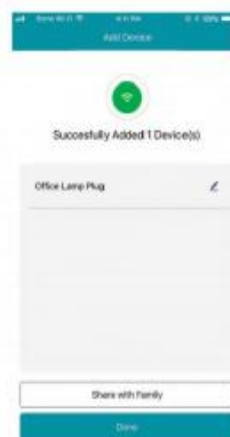


g. Device Home Screen



h. ON/OFF Control



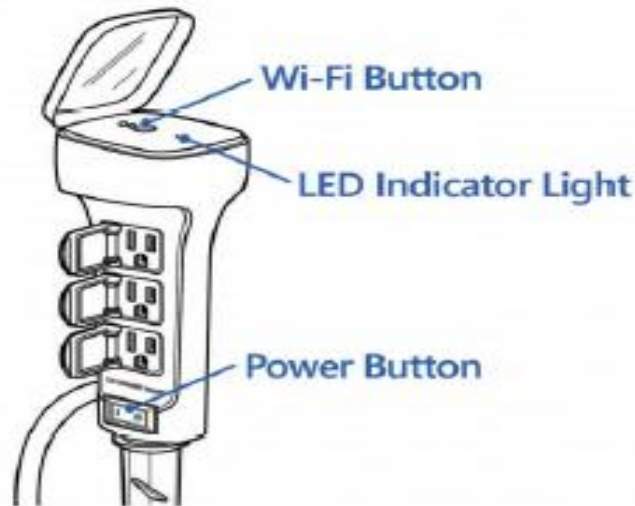

After you have successfully set up the CE Smart app and your device(s) you may control them remotely from your mobile device using a Wi-Fi or Cellular connection. Compatible with Amazon Alexa and Google Home.

### **LED Indicator Light:**

Quick Flashing Blue - Connecting to the network  
 Slow Flashing Blue - AP Mode  
 Solid Blue - The Wi-Fi Stake is switched Off  
 Solid Red - The Wi-Fi Stake is switched On

### **CE Smart Reference Guide:**

#### **Register / Create an Account**

Tap "Register" to create an account using your email address or mobile phone number. Optionally you may tap Sign in with SMS to create a temporary account using your mobile phone number.

- Tap Register to enter registration page.
- The system automatically recognizes your Region (country/code). You may also follow the instructions to manually select your country code. Enter your email address or mobile number and tap Login (do not include dashes, spaces, or +1, only use 10 digit number).
- If you enter your 10 digit mobile number, you will get a verification code via text message. Enter the verification code, create a password, and tap "Confirm" to finish your registration.
- If you enter your email, create a password and tap "Confirm" to finish your registration.

#### **Login / Registered Account**

- Tap "Login" to sign in to your account.
- Enter your previously registered email address or mobile number and password, and then tap "Login."

#### **Login / Temporary Account / Sign in with SMS**

- Tap "Sign in with SMS" if you want to create a temporary login. Note: there is no password and your login account will not be saved.
- Enter your 10 digit mobile number (no dashes or spaces) and tap "Get." You will receive a verification code via text message.
- Enter the verification code and tap "Login."

#### **Forgot Password**

- To reset Password, Tap "Forgot password."
- Enter your email address or mobile number and tap "Next."

- Enter the verification code received via text or email, then enter a new password, tap "Confirm" to finish.

### **Add Device + Normal Mode**

- Enter the app, tap "+" Add Device in the centre bottom of the page to enter device connection page.
- There are two Wi-Fi network connection methods (Normal Mode and AP Mode). Normal Mode is the default and connects via your 2.4GHz Wi-Fi channel only. (Does not work with 5GHz channel.) Normal mode allows you to connect several CE Smart devices at the same time.
- For Normal Mode, please make sure the indicator light on the Power Stake is set to flashing rapidly (2 times per second).
- Press power button to turn on device, press again to turn off device.
- Press the Wi-Fi button and hold for 10 seconds until blue indicator light starts rapid flashing. If steady red light turns back on again, press and release button to get blue light quickly flashing.
- Tap "Confirm indicator rapidly blink."
- Enter your 2.4GHz Wi-Fi password and tap "Confirm" to enter the device connection process.
- Device Connection Process will begin and connect device.
- Tap Done.

### **AP Mode (Access Point)**

- Tap "AP Mode" in upper right screen.
- Connect your phone to 2.4GHz Wi-Fi.
- In AP Mode your device broadcasts a device name in your phone's Wi-Fi settings that allows the Wi-Fi device to connect to your network. AP mode allows you to connect devices one by one.
- Make sure the device's indicator light is slowly flashing (1 time every 3 seconds). Press Wi-Fi power button to turn on device, press again to turn off device. Press and hold Wi-Fi power button for 10 seconds to set blue indicator light to fast flashing. Press and hold again until blue indicator light slowly flashes.
- Tap "Confirm indicator slowly blink."
- Enter your 2.4GHz Wi-Fi password and tap "Confirm."
- Open Wi-Fi Settings to connect to Device's Access Point Wi-Fi name.
- Locate then Tap the Wi-Fi device name, i.e. SmartLife\_XXXX.
- Tap Connect.
- Go back to CE Smart app.
- Device Connection Process will begin and connect device.
- Tap Done.

### **Network Connection Process**

The app goes through the process of trying to Connect Device, and displays a percentage on the Connecting Now screen while connecting. When the percentage reaches 100% the device should be successfully connected and registered to the cloud. The device default name will appear on the screen. You may rename the device by tapping the pencil icon to edit. This allows you to change to a better description of what the Power Stake is controlling, for example, "Holiday Decorations." Tap "Done" or "Share with Family" to finish setup.

### **Troubleshooting Adding Device Failed**

If your app interface failed to connect your stake to your mobile device, it means that the network connection failed. Make sure you are connected to a 2.4GHz Wi-Fi channel, you entered the correct Wi-Fi password, and the Blue light is quickly flashing. Try connecting again or view help in the app. Try connecting inside first then move the stake outside.

Not all Wi-Fi installations are the same. If you are having trouble getting the light to fast blinking when setting up your device on your Wi-Fi, do

not give up. Try these steps several times repeatedly until you get the light to fast blinking.

### **Controlling Devices**

After successful configuration, the connected devices will be displayed on the home screen. Tap the device name to enter its control page.

Access to the control buttons is located in the upper right corner of the screen “...” in addition to Switch, Countdown and Timer on main screen.

Note: When device is offline or no longer connected, “Offline” will instructions to re-connect the device.

### **Device Control Center Features**

- **Switch:** Switch the outlet on and off remotely using Wi-Fi or Cellular connection.
- **Countdown:** Set a countdown timer to set your device to either turn on or turn off once.
- **Timer:** Set on and off schedules for each device. On and off schedules must be set up individually. Make sure to set an off schedule for every on schedule.

### **Device Settings / ...**

To control your devices Tap “...” in upper right corner of device control screen.

- **Modify Device Name**> Set a custom name for your device.
- **Check the Network**> Check your network connection.
- **Use Amazon**> Follow the on-screen instructions for how to set up Amazon Alexa voice control of your devices with the Amazon Alexa app and an Amazon Echo device.
- **Use Google Home**> Follow the on-screen instructions for how to set up Google Assistant voice control of your devices with the Google Home app and a Google Home device.
- **Device Sharing**> Tap “Add” to share the device with family members; they must have registered CE Smart app login name.
- **Device Info**> Displays your Device ID, IP address and Mac Address.
- **Create Group**> Create a group to control multiple devices simultaneously. A list of available devices to group will be displayed. Only identical devices with same model number may be grouped.
- **Send Feedback**> Send feedback to the manufacturer.
- **Check for Firmware Update**> Display the latest version.
- **Remove Device**> Remove the device from the app. Note: this won't delete the customized device information; previously connected device information is stored.
- **Restore Manufacturer Defaults**> Delete the stored device information completely.

### **Profile**

Tap “Profile” located at bottom of home screen.

**Tap to set your name**> Below are options available for set up:

Add Profile Picture, Nickname, Phone Number, Account location, Temperature Unit, Time Zone, Change Login Password, Pattern Unlock, Logout

**Device Sharing**> Users sharing your device.

**Message Center**> Messages related to the app.

**Integration**> Display list of supported devices and set up instructions for Amazon Echo and Google Home Devices

**Scan QR Code**> QR code scanner

**FAQ**> Tap to view list of frequently asked questions

**Feedback**> Display feedback messages sent or send new feedback message.

**About**> Current app version. Rate Us: submit rating and/or review.

**Settings**> Turn on/off Sound, Vibrate, and Push Notifications, Clear Cache.

**Caution:**

This device complies with Part 15 of the FCC Rules / Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference. (2) this device must accept any interference received, including interference that may cause undesired operation.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**MPE Reminding**

To satisfy FCC / IC RF exposure requirements, a separation distance of 20 cm or more should be maintained between the antenna of this device and persons during device operation.

To ensure compliance, operations at closer than this distance is not recommended.

*L'antenne installée doit être située*

*de façon à ce que la population ne puisse être exposée à une distance de moins de 20 cm. Installer l'antenne de façon à ce*

*que le personnel ne puisse approcher à 20 cm ou moins de la position centrale de l'antenne.*

*La FCC des états-unis stipule que cet appareil doit être en tout temps éloigné d'au moins 20 cm des personnes pendant son fonctionnement.*