

# PERS-4200 Personal Emergency Reporting System Quick Guide

## PERS Console Operating Modes

Your PERS Console operates in three operating "modes". Each mode sets the Console to act differently to match your lifestyle at different times of the day.

In any of the three modes, the Console is always ready to report an emergency if you press the **HELP** button or activate one of your portable emergency sensors.

### Home Mode

Home Mode is for when you are at home during the day. In Home Mode, the Console knows if your emergency sensors are present and ready to use. If a sensor does not regularly report to the Console, a trouble report can be sent to your monitoring service.

### Away Mode

Away Mode is for when you are going to be away from home. In Away Mode, the Console knows that your portable emergency sensors might be away from the Console and will abstain from reporting any sensors that are missing. Console announcements and reminder messages are also suppressed in Away Mode.

### Night Mode

Night Mode is for nighttime when you are sleeping or do not wish to be disturbed. In Night Mode, Console operates the same as in Home Mode except that announcements and reminder messages are suppressed.


## In Case of Emergency

If you need assistance, place a call to the monitoring service by pressing the **HELP** button on the Console or by activating one of your portable emergency sensors.

Remember, the portable emergency sensors send radio signals to the Console, and there is a limit to the maximum distance from the Console that the portable emergency sensors can be used.

Do not press **Cancel** before talking to the monitoring service dispatcher or your emergency call may be canceled.

The Console will announce "Emergency call being placed". When your monitoring service receives the call, they will verify the nature of your emergency and dispatch help for you. If the Console's 2-way communications are active, the Console will announce "Emergency reported, please stand by". The monitoring service can talk and listen to you through the Console.

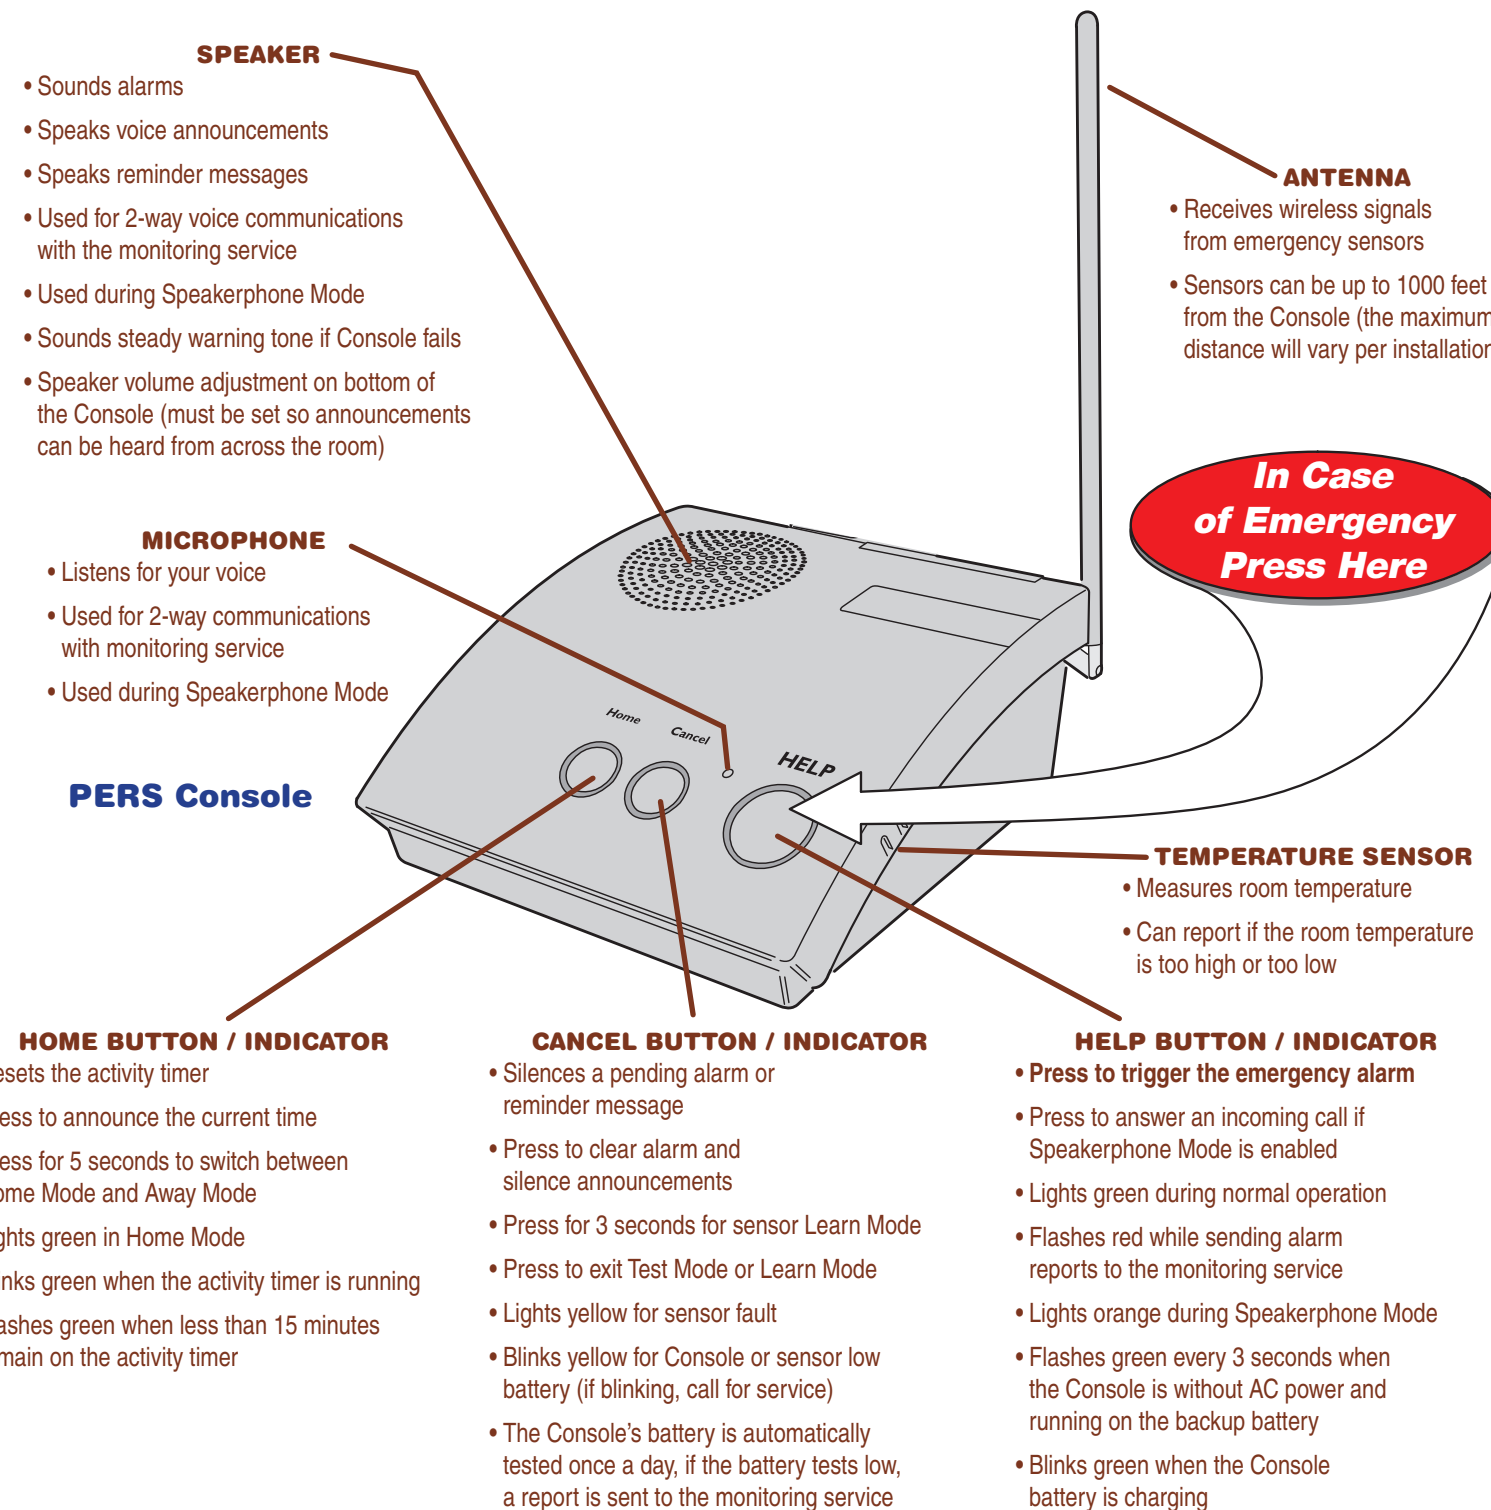

**Pendant Sensor**  
DXS-LRP



**Wristband Sensor**  
DXS-LRC



**Carbon Monoxide Sensor**  
DXS-80



**Smoke Sensor**  
DXS-73

## PERS Console Special Features

In addition to the three operating modes, your PERS Console contains several special features that can be turned on or off by your monitoring service.

### Activity Timer

When the activity timer is on, you will need to press the **Home** button or activate a special sensor every day to prevent an automatic alarm from triggering. Your monitoring service can set one or two time periods that will be available to you to reset the activity timer. The activity timer is always off in Away Mode or Night Mode.

Activity time period #1: \_\_\_:\_\_\_ AM or PM to \_\_\_:\_\_\_ AM or PM

Activity time period #2: \_\_\_:\_\_\_ AM or PM to \_\_\_:\_\_\_ AM or PM

### Smoke & Carbon Monoxide Detection

For increased protection, wireless smoke and carbon monoxide detectors can be setup as sensors with your PERS Console. In case of a dangerous fire or gas event, the sensor will sound its alarm and the Console's alarm, which can be reported to the monitoring service.

### Reminder Messages

Five pre-recorded reminder messages can be announced by the Console at set dates and times. The messages can inform you when it's time for an appointment, your medicine, a ride, or to test your PERS system. One special message can also be set up as an alarm clock. Press **Cancel** to silence a reminder message.

### Temperature Alarms

The Console contains a sensor that constantly monitors the room temperature. The system can report if the room temperature goes higher or lower that limits preset by your monitoring service.

High temperature limit: \_\_\_\_\_ Low temperature limit: \_\_\_\_\_

### Speakerphone Mode

The Console can be set up to work as a hands-free speakerphone for incoming calls. Pressing the **HELP** button or activating an emergency sensor while the telephone is ringing will answer the call. Pressing **HELP** or activating an emergency sensor during the call will disconnect the caller.

### Remote Call-in Speakerphone Mode

The Console can be set up to answer the phone and start the speakerphone automatically after the caller enters a 4-digit password. The caller can talk and listen to you through the Console's speaker and microphone.

## PERS Console Alarm Priorities

Each type of alarm is assigned a priority. Higher priority alarms override lower priority alarms. Smoke alarms (on/off horn sound) have the highest priority, followed by carbon monoxide alarms (on/off buzz sound), emergency alarms (3 beeps sound), then other types of maintenance and reminder reports (various sounds).



