

# S245112PT Series

## 2.4-2.5 / 5.1-5.9 GHz Dual-Band MIMO Directional Antenna



### Dual-Band Point-to-Point MIMO Directional Antenna

Laird Technologies' S245112PT is a dual-band, directional panel antenna for use in 802.11n MIMO applications. Enclosed in a low-profile radome, the antenna is mounted using the included articulating mount. The mount can be affixed to a mast or anchored directly to a vertical surface. Each of the three MIMO antenna elements are connected to the WLAN Access Point via a low loss, plenum-rated, coax pigtail. The radiation patterns are uniform and symmetrical, providing high-level signal density into defined coverage zones. This antenna will greatly enhance the performance of 802.11n systems. The dual-band frequency coverage means that a single type of antenna can be deployed with any MIMO radio in the 2.4-2.5 GHz and 5.1-5.9 GHz bands.

#### FEATURES

- Low profile housing
- Mounts to Wall or Mast
- Heavy Duty Articulating Mount
- Performance optimized using Laird Technologies' proprietary RF optimization tools
- Designed specifically to support 802.11n networks
- Various connector and coax lengths options available

#### MARKETS

- Hospital
- Campus
- Research Institute
- Public safety wireless systems
- Transport Terminals

### 3 X 3 Element Dual-Band Panel Antenna

#### Specifications

Part Number:	S245112PT
Frequency:	2400-2500 MHz 5125-5875 MHz
Gain:	10.9 dBi @ 2450 MHz 13.5 dBi @5500 MHz
3 dB Beamwidth-Azimuth:	45° @2.4 GHz / 20°@5.0 GHz
3 dB Beamwidth-Elevation:	45° @2.4 GHz / 20°@5.0 GHz
Polarization:	Linear, 2 Vertical, 1 Horizontal
VSWR:	2.0:1
Cable Length in. (mm):	36" (914) Plenum rated (other lengths available)
RF Connector:	Reverse SMA (3x)
Power Rating:	10 W
Radome:	Polycarbonate
Dimensions (mm):	16.2" x 14.7" x 1.4" (411.4 x 373.3 x 35.8)
Weight:	1.1kg
Wind Surface Area:	@ 0°, 0.067m <sup>2</sup> / @ 90°, 0.009m <sup>2</sup>
Wind Survival:	200 km/h
Operational Temperature:	-30°C to +65°C
Mount Style:	Articulating for Wall / Mast
Water / Dust Seal Rating:	IP-67
RoHS:	Compliant




global solutions: local support™


USA: +1 800 258.3860  
Europe: +46-8-555.722-00  
Asia: +886-2-2286-2828

comsales@cushcraft.com  
www.cushcraft.com


#### Antenna Patterns

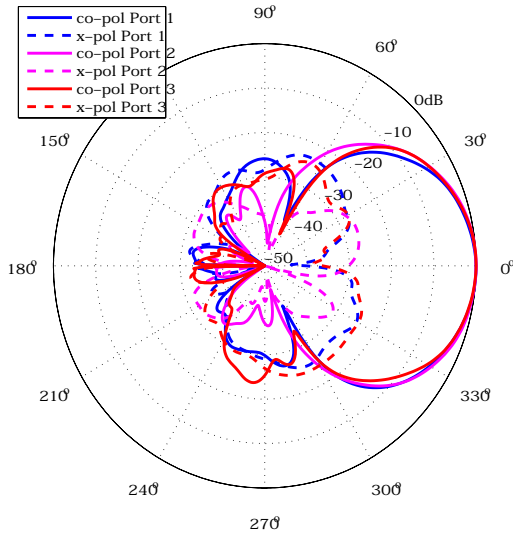


H Plane 2.45 GHz

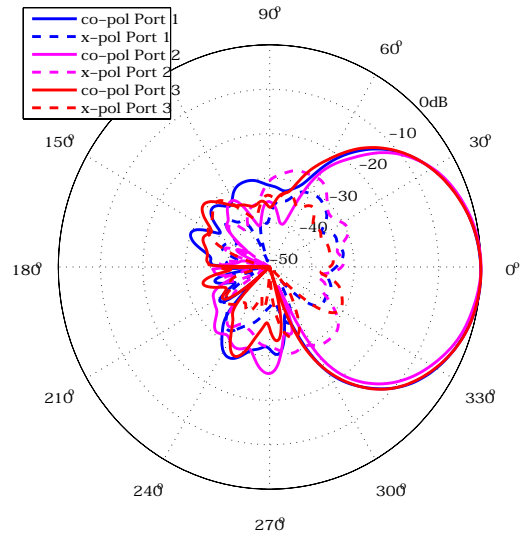


E Plane 2.45 GHz

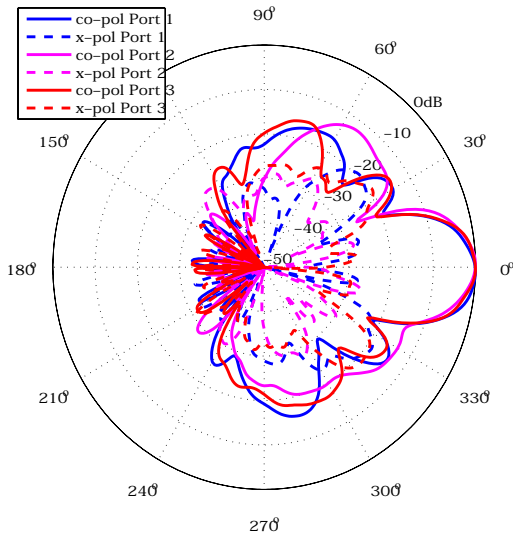

H Plane 5.5 GHz

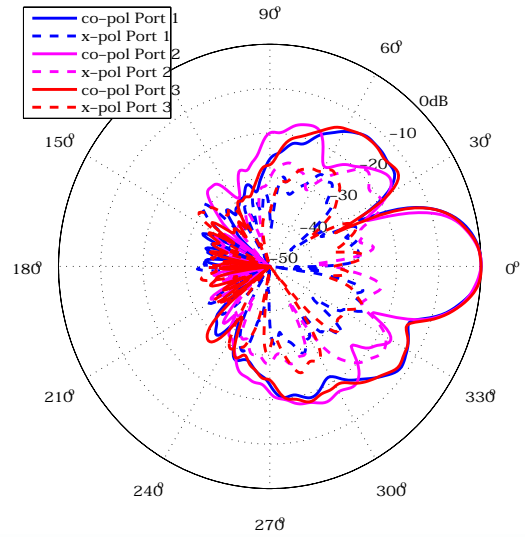

E Plane 5.5 GHz



ANT-SPEC-S245112PT-ANT 1108

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request. For further information please visit our website at [www.lairdtech.com](http://www.lairdtech.com). Alternatively contact: [wirelessinfo@lairdtech.com](mailto:wirelessinfo@lairdtech.com). Bluetooth® is a trademark owned by Bluetooth SIG, Inc., USA and licensed to Laird Technologies.

© 2008 All Rights Reserved. Laird Technologies is a registered trademark of Laird Technologies, Inc.