

# 2


## Hardware Installation

The following diagrams provide you a basic installation for your PC11B2 (MS-6828), which is suitable for most desktop PCs. For more information about the PCI slot, please refer to the user's manual of your mainboard.

**Step 1.** Remove the computer cover. Locate the available PCI slot on your mainboard.


**NOTE:** Turn off your system and disconnect the power cable before installing the PC11B2 (MS-6828).

PCI slot

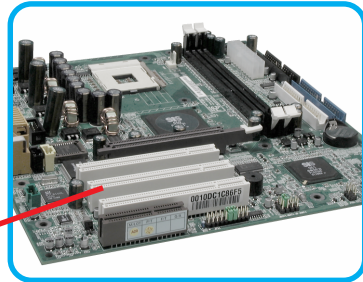

**Step 2.** Put the PC11B2 (MS-6828) directly over the PCI slot and press it into the slot firmly.

Do not hold the PC11B2 (MS-6828) on the golden finger while installing; doing this may cause interference or damage.

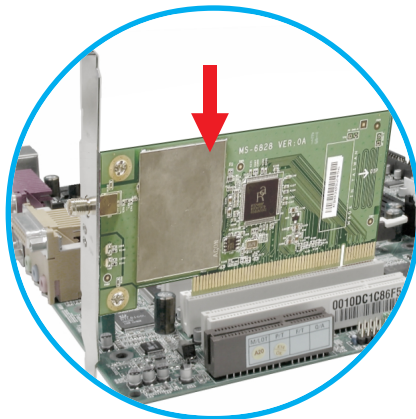


---

**Step 3.** Replace the computer cover after securing the PC11B2 (MS-6828) with a bracket screw.

**Step 4.** Connect the external antenna to the connector on the PC11B2's (MS-6828) bracket.



*Connecting the external antenna*

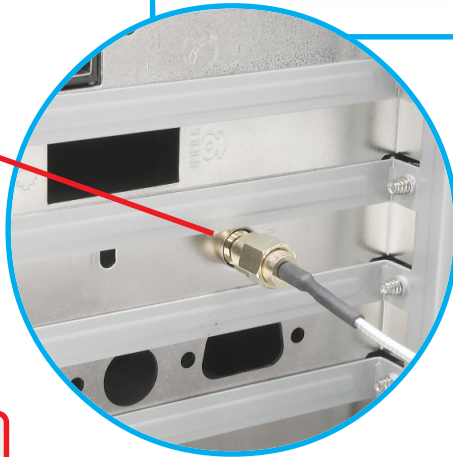

*If you are not skilled at installing the PCI adapter, please ask the vendor or an experienced technician for help.*