



The EE202 is an e-paper based electronic shelf label with a screen size of 2" and with 802.15.4 based wireless communication.

Specifications Manual

All information subject to change without notice.

Document History

Model Number:	EE202	Specification Number:
Edition:	1.4	Original Spec Number:
Date:	July 17, 2015	

Copyright 2015 Opticon Sensors Europe BV. All rights reserved.

This manual may not, in whole or in part, be copied, photocopied, reproduced, translated or converted to any electronic or machine readable form without prior written consent of Opticon.

Limited Warranty and Disclaimers

PLEASE READ THIS MANUAL CAREFULLY BEFORE INSTALLING OR USING THE PRODUCT.

Serial Number

A serial number appears on all Opticon products. This official registration number is directly related to the device purchased. Do not remove the serial number from your Opticon device. Removing the serial number voids the warranty.

Warranty

Unless otherwise agreed in a written contract, all Opticon products are warranted against defects in materials and workmanship for two years after purchase. Opticon will repair or, at its option, replace products that are defective in materials or workmanship with proper use during the warranty period. Opticon is not liable for damages caused by modifications made by a customer. In such cases, standard repair charges will apply. If a product is returned under warranty and no defect is found, standard repair charges will apply. Opticon assumes no liability for any direct, indirect, consequential or incidental damages arising out of use or inability to use both the hardware and software, even if Opticon has been informed about the possibility of such damages.

Packaging

The packing materials are recyclable. We recommend that you save all packing material to use should you need to transport your product or send it for service. Damage caused by improper packaging during shipment is not covered by the warranty.

Trademarks

Trademarks used are the property of their respective owners.

Opticon Inc. and Opticon Sensors Europe B.V. are wholly owned subsidiaries of OPTOELECTRONICS Co., Ltd., 12-17, Tsukagoshi 4-chome, Warabi-shi, Saitama, Japan 335-0002. TEL +81-(0) 48-446-1183; FAX +81-(0) 48-446-1184

SUPPORT

USA

Phone: 800-636-0090

Email: support@opticonusa.com

Web: www.opticonusa.com

Europe

Phone: 023-5692792

Email: support@opticon.com

Web: www.opticon.com

Contents

1. Abstract	5
2. Overview	5
3. Physical Features	6
3.1. Dimensions	6
3.2. Weight.....	6
4. Environmental Specifications	6
4.1. Operating Temperature and Humidity.....	6
4.2. Storage Temperature and Humidity.....	6
4.3. Static Electricity	6
4.4. Drop resistance.....	6
5. Controls	7
6. Electrical Specifications	7
6.1. Electrical Characteristics	7
6.2. Battery.....	7
7. Radio Specifications	8
7.1. Protocol.....	8
7.1.1. The physical layer	8
7.1.2. The medium access control layer	9
7.2. Security	9
8. Labeling	9
8.1. Product label	9
8.2. Shipment box labels	11
9. Accessories	12
10. Packaging Specifications	12
10.1. Individual Packaging Specification.....	12
10.2. Collective Packaging Specification	13
11. Regulatory Compliance	14
11.1. Product Safety.....	14
11.2. EMC	14
11.3. WEEE.....	15
11.4. RoHS	15
12. Safety	16
12.1. Shock	16
12.2. Temperature Conditions	16
12.3. Foreign Materials.....	16

12.4. Battery.....	16
12.5. Other	16
13. Mechanical Drawing	17

Table of Figures

Figure 1: Dimensions.....	6
Figure 2: product label	9
Figure 3: product label dimensions	Error! Bookmark not defined.
Figure 4: shipment box labels	11
Figure 5: HL hinged shelftaker for data strips.....	12
Figure 6: Individual packaging	12
Figure 7: Collective packaging 1	13
Figure 8: Collective packaging 2.....	13
Figure 9: Mechanical drawing	17

1. Abstract

This manual provides specifications for the EE202 electronic shelf label (hereafter referred to as “ESL”).

2. Overview

The EE202 is an E-ink based ESL with a 2.4GHz radio for data communication. This product uses Direct Sequence Spread Spectrum RF technology that allows for ultra-low power consumption combined with a reduced sensitivity to background noise. That means less interference by other radios that operate in the 2.4GHz band. The radio protocol that is used is based on the IEEE 802.15.4 standard that specifies the physical layer and media access control for low-rate wireless personal area networks.

A development kit is available that consists out of a base station, several EE202 tags and PC software that allows people to quickly test the system and makes it easier to integrate this ESL system into an existing back office system.

3. Physical Features

3.1. Dimensions

W 65.7 x H 34.9 x D 13.7 mm

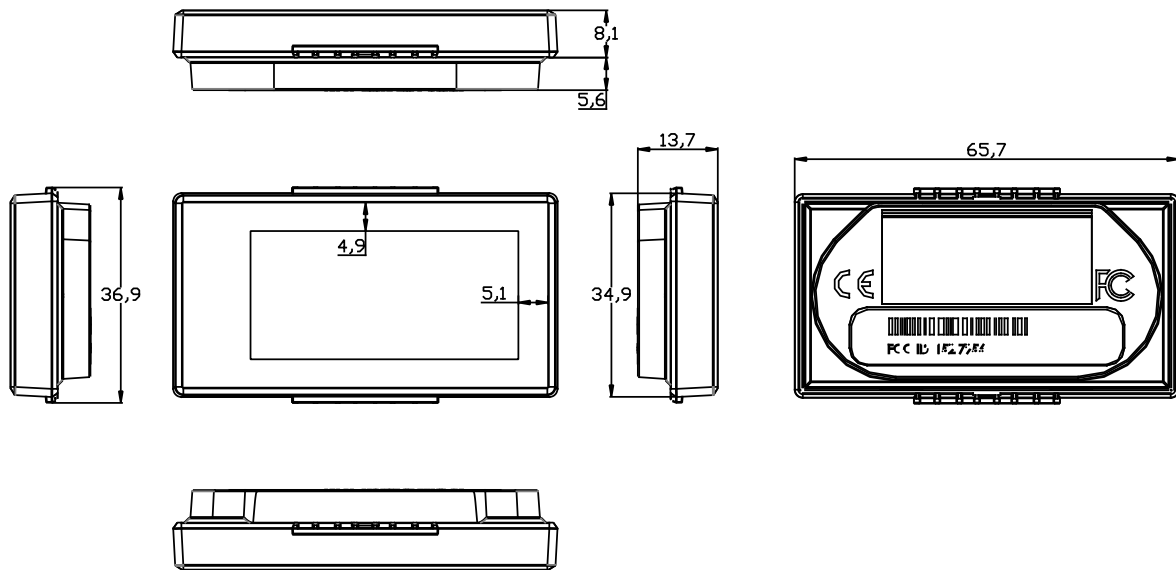


Figure 1: Dimensions

3.2. Weight

40 g (including battery)

4. Environmental Specifications

4.1. Operating Temperature and Humidity

Temperature: -20 to 50° C

Humidity: 20% to 85% RH

4.2. Storage Temperature and Humidity

Temperature: -25 to 60° C

Humidity: 20% to 85% RH

4.3. Static Electricity

Air discharge: ± 8 kV MAX (No malfunction)
 ± 15 kV MAX (No destruction)

Contact discharge: ± 4 kV MAX (No malfunction)
 ± 8 kV MAX (No destruction)

4.4. Drop resistance.

There will be no sign of decreased performance after the following drop test:

Drop the ESL from 1.8 M above the concrete floor (6 sides, 3 times each).

Scratches or discoloration of the casing do not decrease product performance.

5. Controls

Items	Specifications		Remarks
CPU	Type	8051 core 8-bit MCU	
	Internal flash ROM	96KB	
	Internal RAM	6 KB	
	Clock frequency	32 MHz	
LCD	Active area	W 45.8 x H 22.0 mm	
	Number of dots	W 200 x H 96	
	Dot pitch	111 Horizontal 111 Vertical	Dots per Inch
Radio	Modulation	DSSS	
	Frequency	2405 - 2480 MHz	Globally approved 2.4GHz band.
	Baud rate	250 Kbits / second	

6. Electrical Specifications

6.1. Electrical Characteristics

Conditions: Operating voltage 3.0V unless otherwise specified

Parameter	Typ	Unit	Remarks
Operating voltage	2.0–3.3	V	Lithium primary battery
Sleep current	1	uA	When the transmitter and receiver are idle
Poll time	>=20	seconds	See below

The ESL is in sleep mode almost the entire time. The device wakes up at regular intervals (called the poll time) and it then transmits a poll request to the base station. When the base station has no data to send, it acknowledges the poll after which the ESL immediately goes back to sleep. The minimum poll rate is configurable and is set to 20 seconds by default. A higher poll rate will decrease the power consumption but will increase the response time.

6.2. Battery

The power is supplied to the ESL by 2 CR2450 batteries:

- Nominal capacity: 1200 mAh (two times 600mAh)
- Nominal voltage: 3.0 V.
- Maximum self-discharge rate: <1% per year
- Usable time: 7 years minimum (Update frequency: 4 times per day, poll time 20 seconds)

The operating time of the batteries is based on any of the following factors that influence the battery life:

Factor	Default values and estimated averages	Correlation * (Higher is better)	Influence
Polling for data & reporting settings	Interval: 20 seconds Retransmissions: 10% Report ratio: 1 to 39	Yes No Yes	61%
Display updates	4 updates per day Temperature: 15-25° C	No No	20%
Out of range / base station OFF %	Not connected: 2% Number of channels: 5	No No	4%
Sleep time	99,9%	Yes	9%
Battery self-discharge	1 % / year	No	6%

* The correlation shows whether increasing the listed value increases or decreases the power consumption of the ESLs.

For example:

- Increasing the poll interval lowers the power consumption
- Turning off the base stations increases the power consumption
- A lower operating temperature increases the power consumption
- More display updates per day increase the power consumption

7. Radio Specifications

Parameter	Min	Typ	Max	Unit	Remarks
Receiver sensitivity		-97	-89	dBm	Over the entire temp. and operating voltage range
Nominal output power	-3	4.5	7	dBm	
Frequency	2405		2480	MHz	Over the entire temp. and operating voltage range
Transfer rate		250Kbit/s			
RSSI range		100		dB	Signal strength indication that can be reported to the base station

7.1. Protocol

Modified 802.15.4 (Physical layer and Media Access Control layer).

7.1.1. The physical layer

The physical layer (PHY) provides the data transmission service, as well as the interface to the physical layer management entity, which offers access to every layer management function and maintains a database of information on related personal area networks. Thus, the PHY manages the physical RF transceiver and performs channel selection and

energy and signal management functions. It operates on the above mentioned frequency band. The PHY layer is 100% compliant and is based on direct sequence spread spectrum (DSSS) technique with a transfer rate of 250 kbit/s.

7.1.2. The medium access control layer

The medium access control (MAC) layer enables the transmission of MAC frames through the use of the physical channel. Besides the data service, it offers a management interface and itself manages access to the physical channel. It also controls frame validation, guarantees time slots and handles node associations. Finally, it offers hook points for secure services. The EE202 does not make use of the optional network beaconing, instead it used a polling mechanism to increase power efficiency. Some changes are made to the standard to allow for more efficient data frames and better power efficiency, especially when nodes are not connected to a base station.

7.2. Security

By default only the image transmission is encrypted using a proprietary encryption protocol. Enhanced encryption/authentication can be requested on demand by loading different firmware on the ESLs in combination with the loading of an encryption key and an additional ESL server module. The protection method for RF-communication is done by 128-bit AES encryption.

8. Labeling

8.1. Product label

The product label is affixed to the ESL as shown below.



Figure 2: product label

The barcode shows the product serial number. This is a 'B' is followed by 10 hexadecimal digits. This serial number is the same as the MAC address in the ESL-label, with the first 6 digits ('3889DC') replaced by a 'B'.

Material: Base + laminate protection against wear.
Base: PP film, thickness 80µm, backing with glue.
Laminate: PET film, clear, thickness 25µm.

The dimensions of the product label are as follows:



8.2. Shipment box labels

The shipment box labels are made from plain paper and are meant to show the regulatory information on the shipment box as well as the quantity in the box. The label design is shown below. The labels are 150mm*95mm and are made from plain paper with adhesive backing.

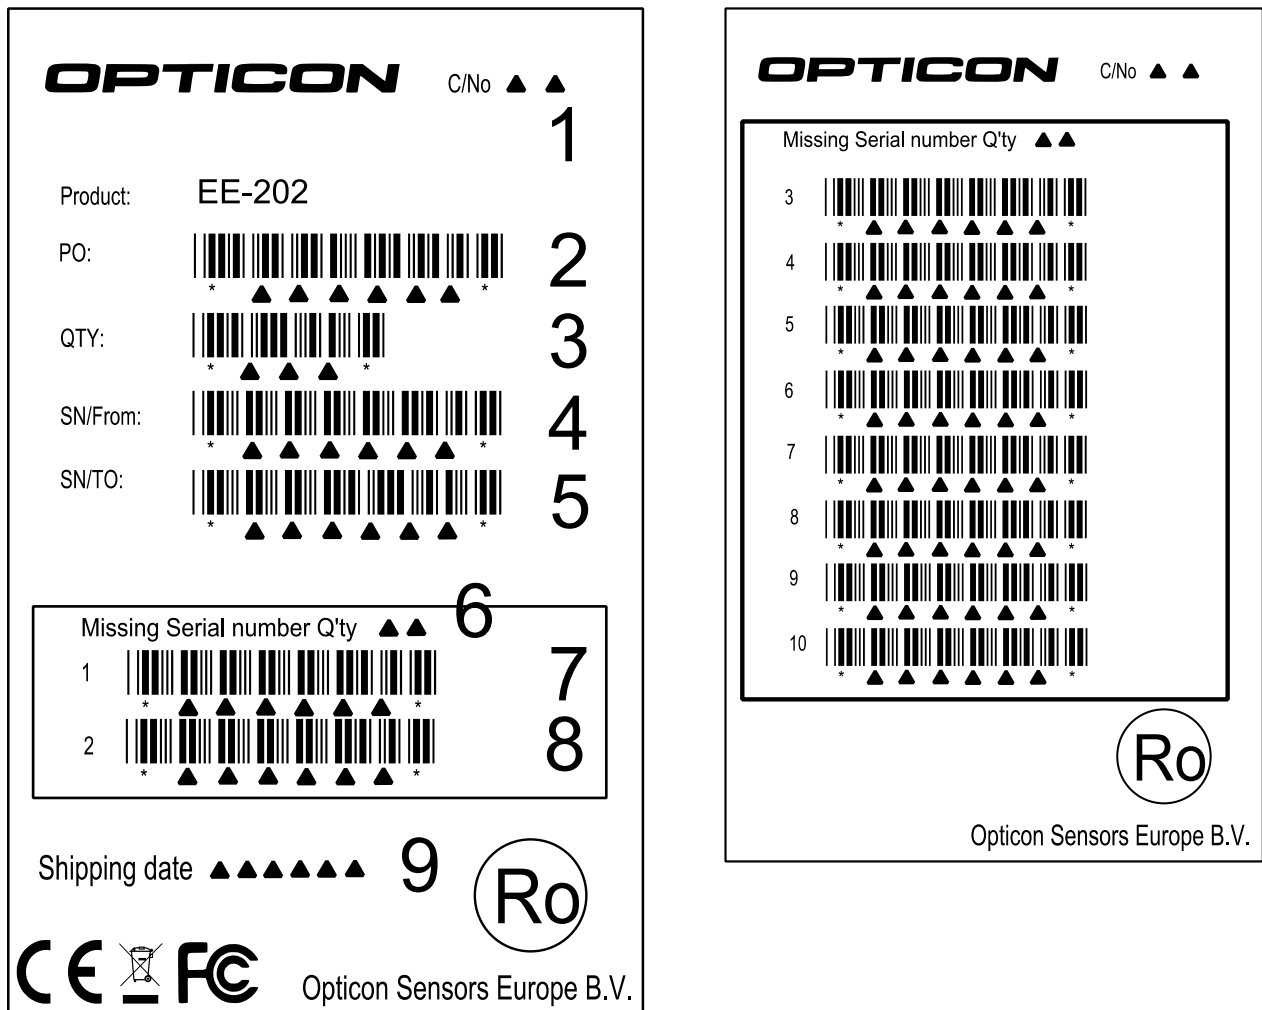


Figure 3: shipment box labels

Label A shows the PO number, the Quantity in the box and the serial number range, all encoded in barcodes as shown. In case there are two or less missing serial numbers, only label A is required. In case there are more than 2 missing serial numbers missing, label B is required to show the rest of the missing serial numbers.

9. Accessories

To mount the ESL onto a rail in a shop, the EE202 can be fitted with a rail attachment system made by HL-display system. This rail attachment accessory can click into a standard rail from **HL** HL-Display and rails are available for nearly all brands of shelves. Please consult a dealer for details on their offering. The shelftaker that fits the EE202 is available from Opticon as an accessory.




Figure 4: HL hinged shelftaker for data strips.

10. Packaging Specifications

10.1. Individual Packaging Specification

The ESL's do not need to be packed separately. To easily pack them, 30 pcs need to be packed in a plastic molder tray:

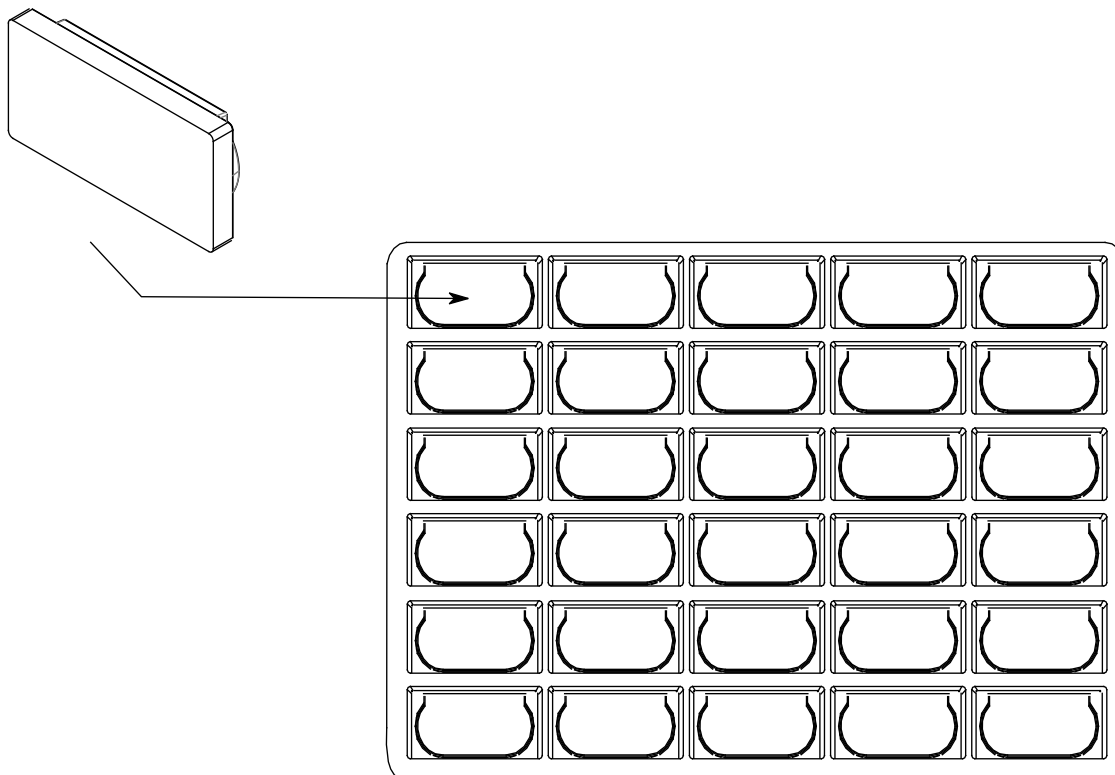


Figure 5: Individual packaging

10.2. Collective Packaging Specification

Pack the tray with 30 EE202's in a plastic bag, fold the open end of the bag and fix it with a piece of tape.

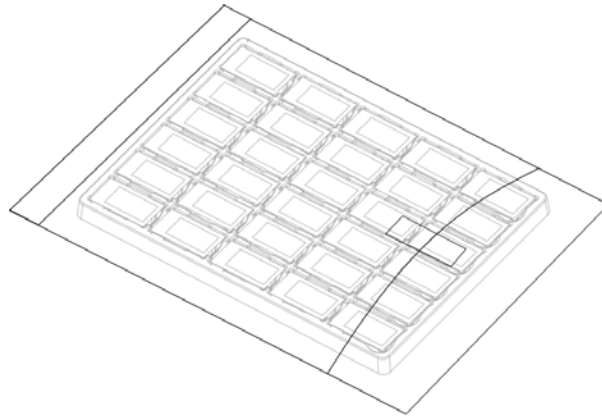


Figure 6: Collective packaging 1

Put 10 stacks, containing 300 ESL's inside a box and stick the shipment box label on the indicated position.

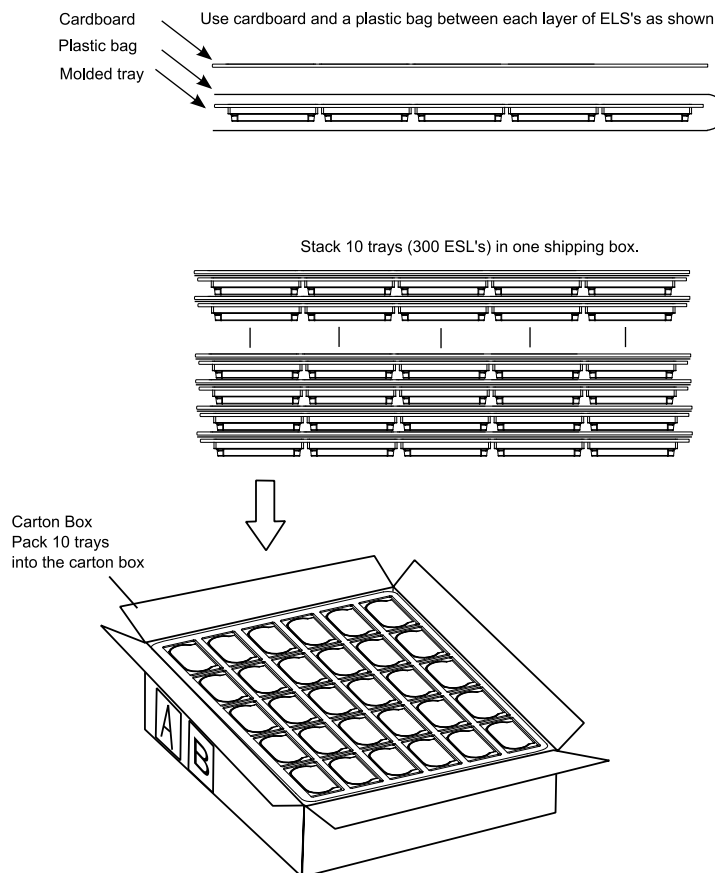


Figure 7: Collective packaging 2

Note: The “RO” mark labeled on the package tray or package box guarantees that the applicable product has passed our test of RoHS restrictions compliance (the restriction of the use of certain hazardous substances in electrical and electronic equipment, 2002/95 EC). However, this document does **not** have any legal weight in the European Union.

11. Regulatory Compliance

11.1. Product Safety

IEC 60950-1:2005 (2nd Edition)+Am 1:2009+Am 2:2013
EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

11.2. EMC

EN55022:2010

EN55024:2010

Federal Communications Commission (FCC) Statement

15.21

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) this device may not cause interference and
- 2) this device must accept any interference, including interference that may cause undesired operation of the device.

RF Radiation Exposure Statement:

1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
2. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

11.3. WEEE

Waste Electrical and Electronics Equipment Directive, 2012/19/EU.



Following information is only for EU-member states:

The use of the symbol indicates that this product may not be treated as household waste. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

11.4. RoHS

RoHS: The restriction of the use of certain hazardous substances in electrical and electronic equipment, 2011/65 EC.

12. Safety

Handle this product carefully. Do not deliberately subject it to any of the following.

12.1. Shock

Do not throw or drop the ESL.

Do not place heavy objects on the ESL.

12.2. Temperature Conditions

Do not use the ESL at temperatures outside the specified range.

Do not pour boiling water on the ESL.

Do not throw the ESL into the fire.

Do not leave the ESL on the dashboard of a car.

12.3. Foreign Materials

Do not immerse the ESL in liquids.

Do not subject the ESL to chemicals.

12.4. Battery

Replace the ESL when its lifetime has expired. This is after max. 10 years of operation or sooner when the battery is depleted. If the battery is depleted sooner, replace the ESL and treat it as chemical waste and dispose of it according to local regulations.

CAUTION
RISK OF EXPLOSION IF BATTERY IS REPLACED
BY AN INCORRECT TYPE.
DISPOSE OF USED BATTERIES ACCORDING
TO THE INSTRUCTIONS

12.5. Other

Do not disassemble this product.

The ESL may be damaged by high voltage discharges.

13. Mechanical Drawing

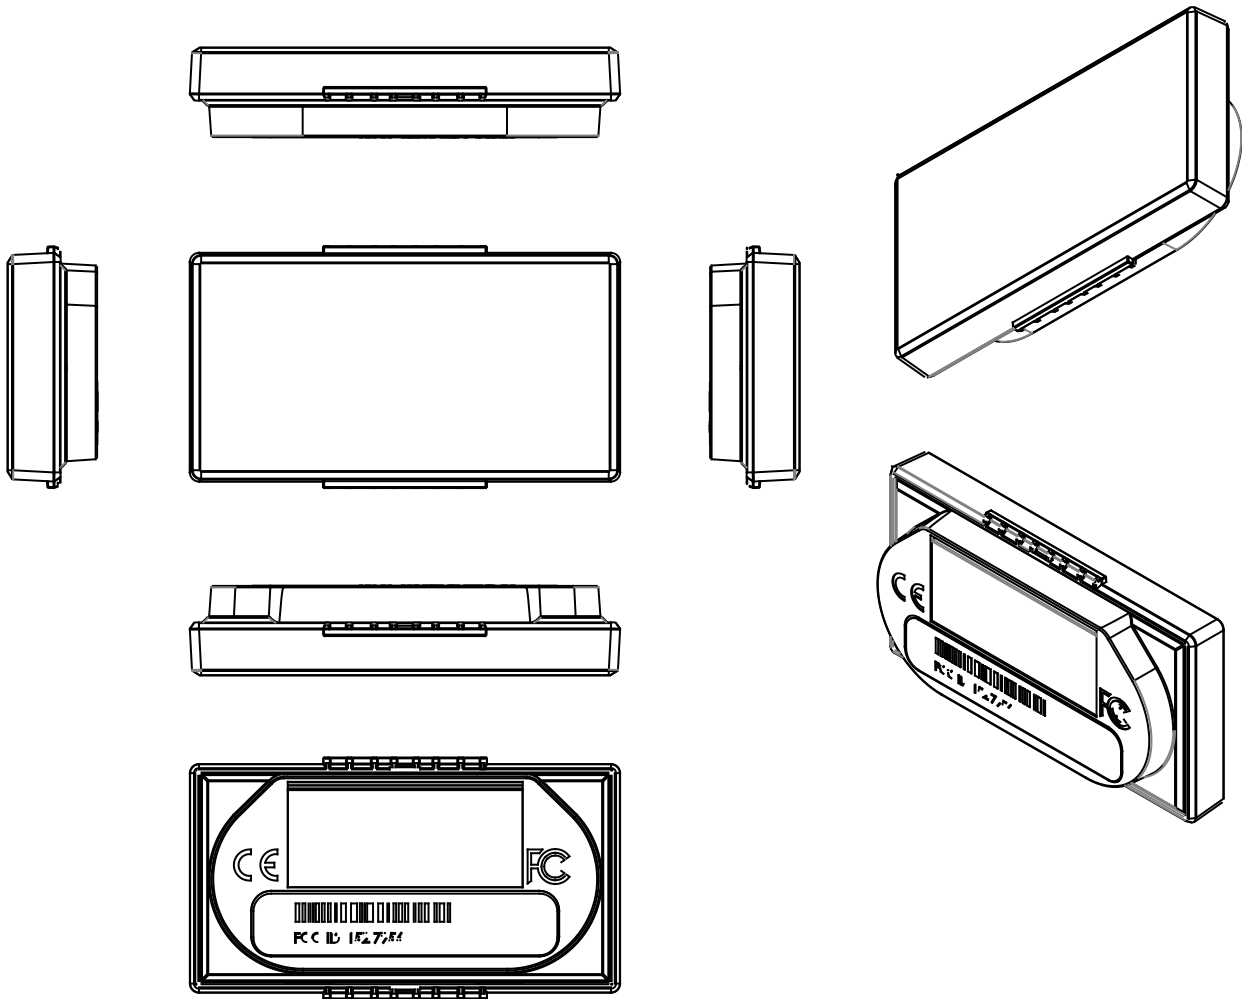


Figure 8: Mechanical drawing